



150W Solid State Broadband EMC Benchtop Power Amplifier 6-18GHz



Features

- High Saturated Output Power 50~52dBm.
- Telecom Infrastructure Applications.
- High peak to average handling capability.
- High linearity and low noise figure.
- Convenient AC Power Input.
- Integrated Cooling.

Typical Applications

- Microwave Radio and VSAT.
- Aerospace and Military Applications.
- EMC / Radiated Immunity Testing.

Electrical Specifications, $T_A=25\text{ }^\circ\text{C}$ Voltage = 110v/220v AC

Parameter	Min	Typ	Max	Min	Typ	Max	Units
Frequency Range	6-13		13-18				GHz
Gain		50			45		dB
Gain Flatness		±6			±2		dB
Gain Adjustment Step (20dB Range)		0.1			0.1		dB
Noise Figure		6.5			7		dB
Input Return Loss		15			15		dB
Output Return Loss		25			25		dB
Output Power for 1 dB Compression (P1dB)		44			43		dBm
Output Power for 3 dB Compression (P3dB)		47			46		dBm
Saturated Output Power (Psat)		51.5			50		dBm
Output Third Order Intercept (IP3)		42			40		dBm
Harmonic Compression		10			10		dBc
Maximum Input Power (No Damage)		Psat-Gain			Psat-Gain		dBm
Weight	50						lbs
Impedance	50						Ohms
Input / Output Connectors	N-Female						
Finish	White Painted Finish						

150W Solid State Broadband EMC Benchtop Power Amplifier 6-18GHz



RF-LAMBDA

The power beyond expectations

RAMP06G18GF

150W Solid State Broadband EMC Benchtop Power Amplifier 6-18GHz

Absolute Maximum Ratings	
Supply Voltage	230v AC
RF Input Power (RFIN) Pin_max = Psat - Gainsat	Psat - Gain
Storage Temperature (°C)	-50 to +125

Ordering Information	
Part No.	Description
RAMP06G18GF	6GHz~18GHz Power Amplifier

Note: Maximum RF input power is set to assure safety of amplifier. Input power may be increased at own risk to achieve full power of amplifier. Please reference gain and power curves.

Power ON Procedure	
Step 1	Connect input and output with 50 Ohm source/load. (in band VSWR<1.9:1 or >10dB return loss)
Step 2	Turn on AC power.
Step 3	Follow Front Panel Instructions
Power OFF Procedure	
Step 1	Turn off RF Output Power
Step 2	Turn Off AC power
Step 3	Disconnect input and output

Amplifier Use

Ensure that the amplifier input and output ports are safely terminated into a proper 50 ohm load before turning on the power. Never operate the amplifier without a load. A proper 50 ohm load is defined as a load with impedance less than 1.9:1 or return loss larger than 10dB relative to 50 Ohm within the specified operating band width.

Power Supply Requirements

Power supply must be able to provide adequate current for the amplifier. Power supply should be able to provide 1.5 times the typical current or 1.2 times the maximum current (whichever is greater).

In most cases, RF - Lambda amplifiers will withstand severe mismatches without damage. However, operation with poor loads is discouraged. If prolonged operation with poor or unknown loads is expected, an external device such as an isolator or circulator should be used to protect the amplifier.

Ensure that the power is off when connecting or disconnecting the input or output of the amp.

Prevent overdriving the amplifier. Do not exceed the recommended input power level.

Adequate heat-sinking required for RF amplifier modules. Please inquire.

Amplifiers do not contain Thermal protection, Reverse DC polarity or Over voltage protection with the exception of a few models. Please inquire.

Proper electrostatic discharge (ESD) precautions are recommended to avoid performance degradation or loss of functionality.


What is not covered with warranty?

Each RF - Lambda amplifier will go through power and temperature stress testing.


Since the die, ICs or MMICs are fragile, these are not covered by warranty. Any damage to these will NOT be free to repair.




Gain vs. Frequency

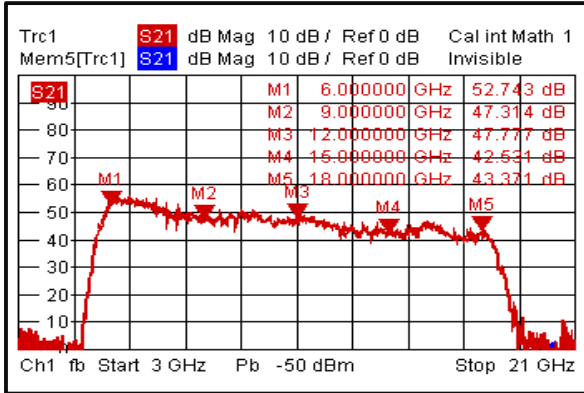


Input Return Loss

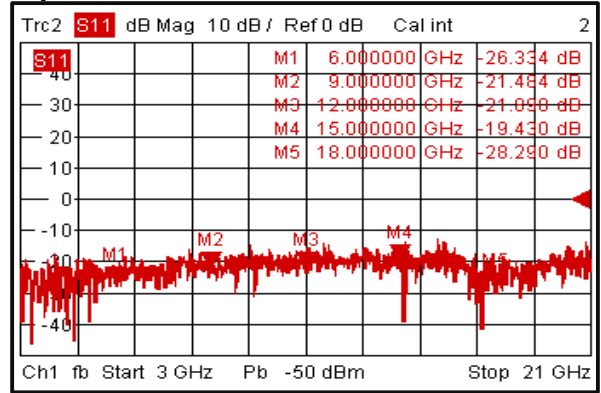


Isolation

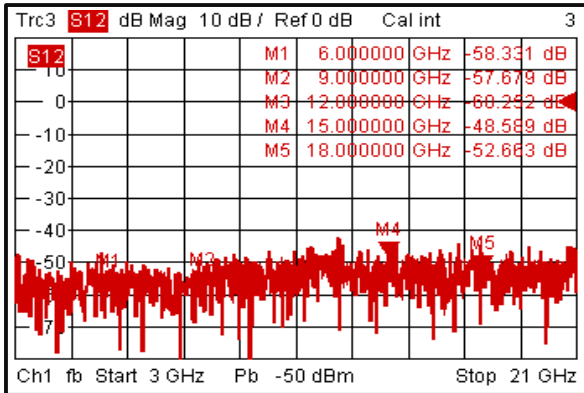


P7dB vs. Frequency

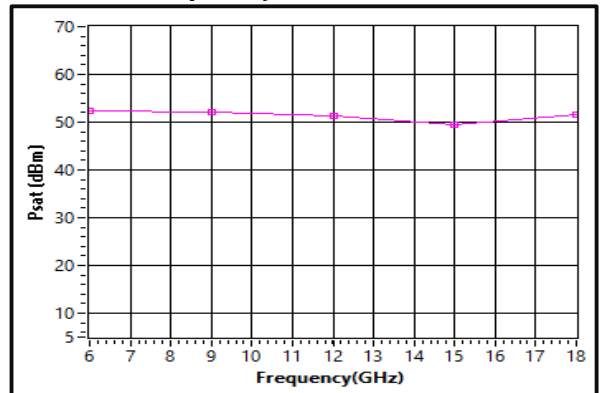


Gain vs. Output Power

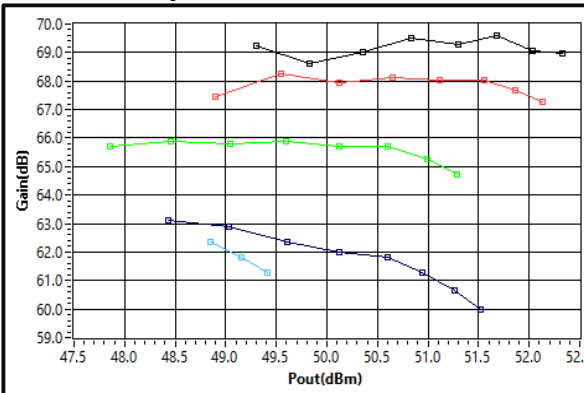

IM3 vs. Pout

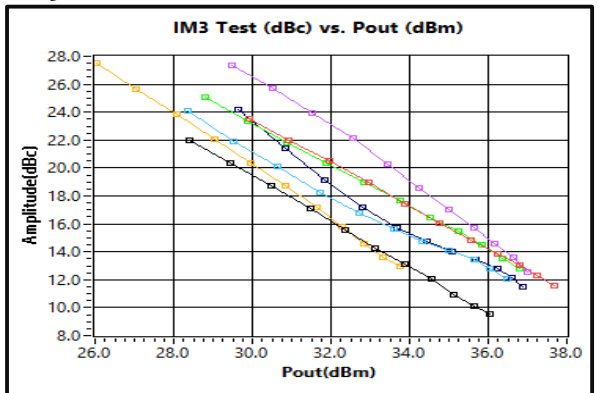

Gain vs. Frequency with +20dB Gain adjustment

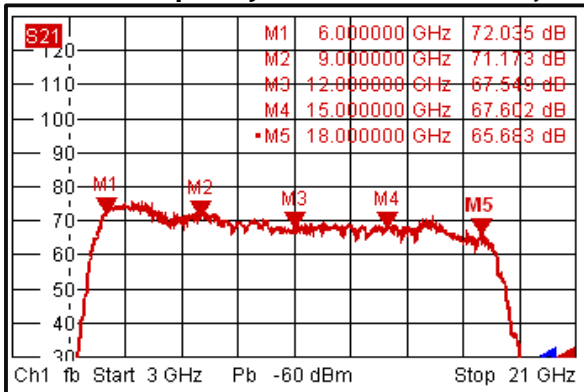




RF-LAMBDA

The power beyond expectations


RAMP06G18GF

150W Solid State Broadband EMC Benchtop Power Amplifier 6-18GHz


Front Panel

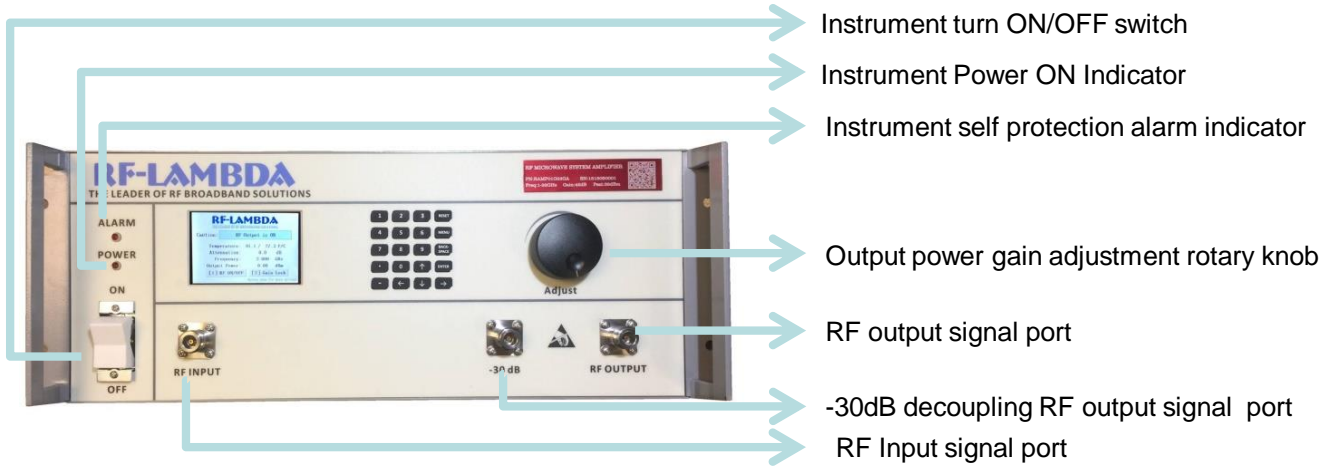

Setup Keys

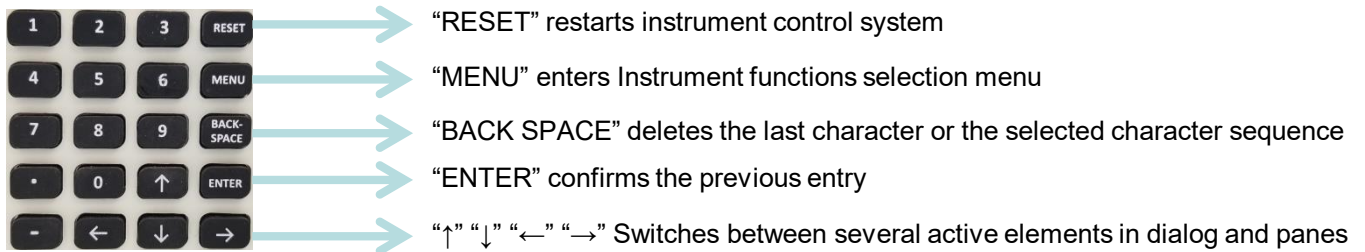


Rear Panel

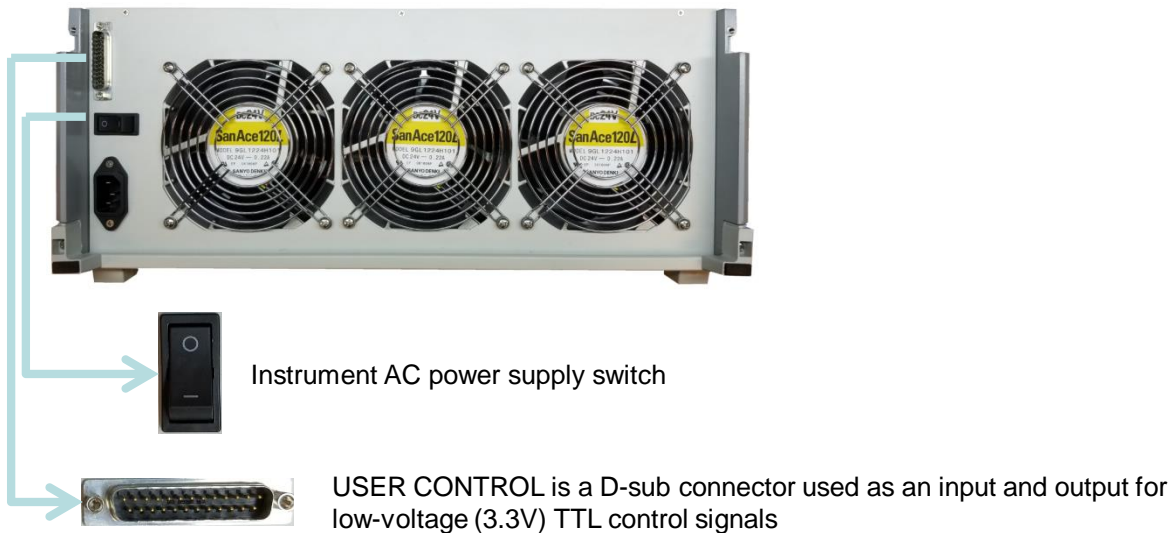



User Control Connector

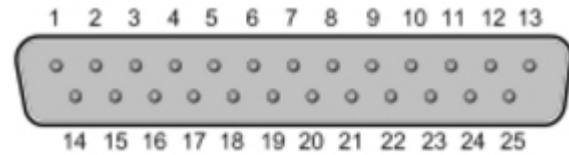

Pin #	Name	Function	Initial State	Description	Applied
1	Reset	Control		Resets PA when logic <u>LOW</u> is applied and released	Yes
2	Drain Disable	Control	LOW	Applying logic <u>HIGH</u> disables drains of amplifiers	Yes
3	Gate Disable	Control	LOW	Applying logic <u>HIGH</u> disables gates of amplifiers	Yes
4	RF IN Over	Indicator	LOW	Pin will be latched to logic <u>HIGH</u> when input signal is over limit	No
5	Temp Over	Indicator	LOW	Pin will be latched to logic <u>HIGH</u> when amplifier is driven over temperature	Yes
6	Current Over	Indicator	LOW	Pin will be latched to logic <u>HIGH</u> when drain current limit is reached	Yes
7	ID Imbalance	Indicator	LOW	Pin will be latched to logic <u>HIGH</u> when an imbalance in the drain current of the combining branches occurs	Yes
8	PA input power	Indicator		PA input power is represented by voltage	No
9	PA output power	Indicator		PA output power is represented by voltage	No
10	PA output reflection power	Indicator		PA output reflection power is represented by voltage	No
11	VSWR	Indicator	LOW	Pin will be latched to logic <u>HIGH</u> when output reflection is over limit	No
12	-----				
13	+5V	Power Supply	+5V	+5V DC is supplied for reference	Yes
14	GND	Ground	GND	Ground	Yes
15	GND	Ground	GND	Ground	Yes

HIGH/LOW voltages are standard TTL signals:
 0.0V-0.8V = LOW
 2V-5V = HIGH

150W Solid State Broadband EMC Benchtop Power Amplifier 6-18GHz




RF-LAMBDA

The power beyond expectations

RAMP06G18GF

Outline Drawing:

All Dimensions in mm [inches]

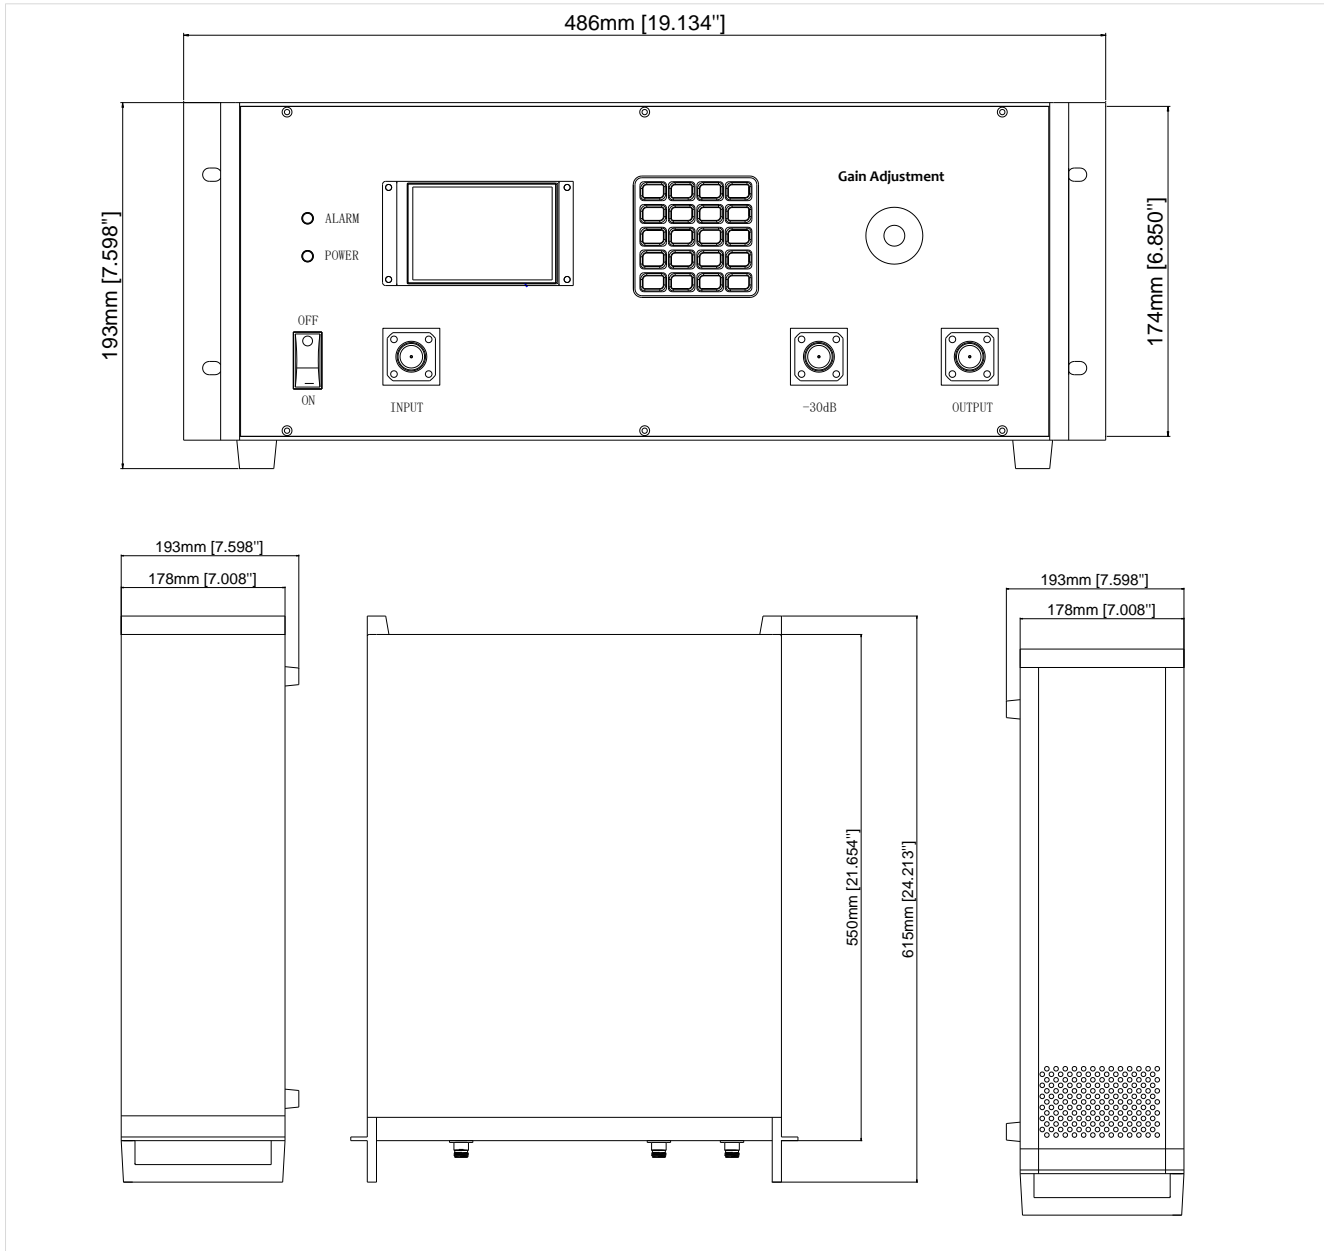

150W Solid State Broadband EMC Benchtop Power Amplifier 6-18GHz

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.