



# R&S® FSW Signal and Spectrum Analyzer Specifications



# CONTENTS

<b>Definitions .....</b>	<b>3</b>
<b>Specifications .....</b>	<b>4</b>
Frequency .....	4
Sweep time .....	5
Resolution bandwidths .....	6
Level .....	7
Adjacent channel power dynamic range .....	14
Measurement speed .....	14
Trigger functions .....	15
Audio demodulator .....	15
I/Q data .....	15
Inputs and outputs .....	17
General data .....	20
<b>Options .....</b>	<b>22</b>
R&S®FSW-B13 highpass filters .....	22
R&S®FSW-B17 digital baseband interface .....	22
R&S®FSW-B21 LO/IF connections for external mixers (for R&S®FSW43 only) .....	22
R&S®FSW-B24 RF preamplifier .....	23
R&S®FSW-B25 electronic attenuator .....	23
R&S®FSW-B71 analog baseband inputs, R&S®FSW-B71E 80 MHz analysis bandwidth for analog baseband inputs .....	24
<b>Ordering information .....</b>	<b>26</b>
Options .....	26
Upgrades .....	28
Service options .....	28
Recommended extras .....	29
Power sensors supported .....	30
Probes supported by option R&S®FSW-B71/-B71E .....	30

# Definitions


## General

Product data applies under the following conditions:

- Three hours storage at ambient temperature followed by 30 minutes warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

## Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as  $<$ ,  $\leq$ ,  $>$ ,  $\geq$ ,  $\pm$ , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

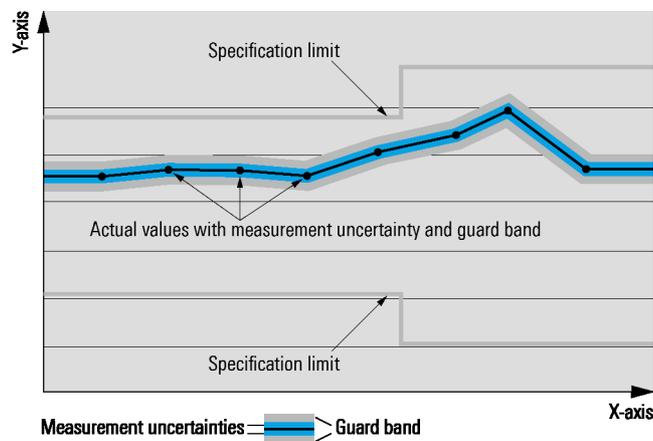

## Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

## Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with  $<$ ,  $>$  or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

## Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

## Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

## Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

# Specifications


## Frequency

<b>Frequency range</b>	R&S®FSW8	
	DC coupled	2 Hz to 8 GHz
	AC coupled	10 MHz to 8 GHz
	R&S®FSW13	
	DC coupled	2 Hz to 13.6 GHz
	AC coupled	10 MHz to 13.6 GHz
	R&S®FSW26	
	DC coupled	2 Hz to 26.5 GHz
	AC coupled	10 MHz to 26.5 GHz
	R&S®FSW43	
DC coupled	2 Hz to 43.5 GHz	
AC coupled	10 MHz to 43.5 GHz	
<b>Frequency resolution</b>	0.01 Hz	

<b>Reference frequency, internal</b>		
Accuracy		$\pm(\text{time since last adjustment} \times \text{aging rate} + \text{temperature drift} + \text{calibration accuracy})$
Aging per year	standard with R&S®FSW-B4 OCXO precision frequency reference option	$\pm 1 \times 10^{-7}$ $\pm 3 \times 10^{-8}$
Temperature drift (0 °C to +50 °C)	standard with R&S®FSW-B4 OCXO precision frequency reference option	$\pm 1 \times 10^{-7}$ $\pm 1 \times 10^{-9}$
Achievable initial calibration accuracy	standard with R&S®FSW-B4 OCXO precision frequency reference option	$\pm 1 \times 10^{-8}$ $\pm 5 \times 10^{-9}$

<b>Frequency readout</b>		
Marker resolution		1 Hz
Uncertainty		$\pm(\text{marker frequency} \times \text{reference accuracy} + 10 \% \times \text{resolution bandwidth} + \frac{1}{2}(\text{span}/(\text{sweep points} - 1)) + 1 \text{ Hz})$
Number of sweep (trace) points	default value range	1001 101 to 32001
Marker tuning frequency step size	marker step size = sweep points marker step size = standard	$\text{span}/(\text{sweep points} - 1)$ $\text{span}/(\text{default sweep points} - 1)$
Frequency counter resolution		0.001 Hz
Count accuracy		$\pm(\text{frequency} \times \text{reference accuracy} + \frac{1}{2}(\text{last digit}))$
Display range for frequency axis		0 Hz, 10 Hz to max. frequency
Resolution		0.1 Hz
Max. span deviation		$\pm 0.1 \%$

<b>Spectral purity</b>		
SSB phase noise	frequency = 1000 MHz, carrier offset	
	10 Hz, without R&S®FSW-B4 option	-80 dBc (1 Hz) (nom.)
	10 Hz, with R&S®FSW-B4 option	-90 dBc (1 Hz) (nom.)
	100 Hz	< -100 dBc (1 Hz)
	1 kHz	< -125 dBc (1 Hz)
	10 kHz	< -134 dBc (1 Hz)
	100 kHz	< -136 dBc (1 Hz)
	1 MHz	< -145 dBc (1 Hz)
	10 MHz	-155 dBc (1 Hz) (nom.)
Residual FM	frequency = 1000 MHz, RBW = 1 kHz, sweep time = 100 ms	< 0.1 Hz (nom.)

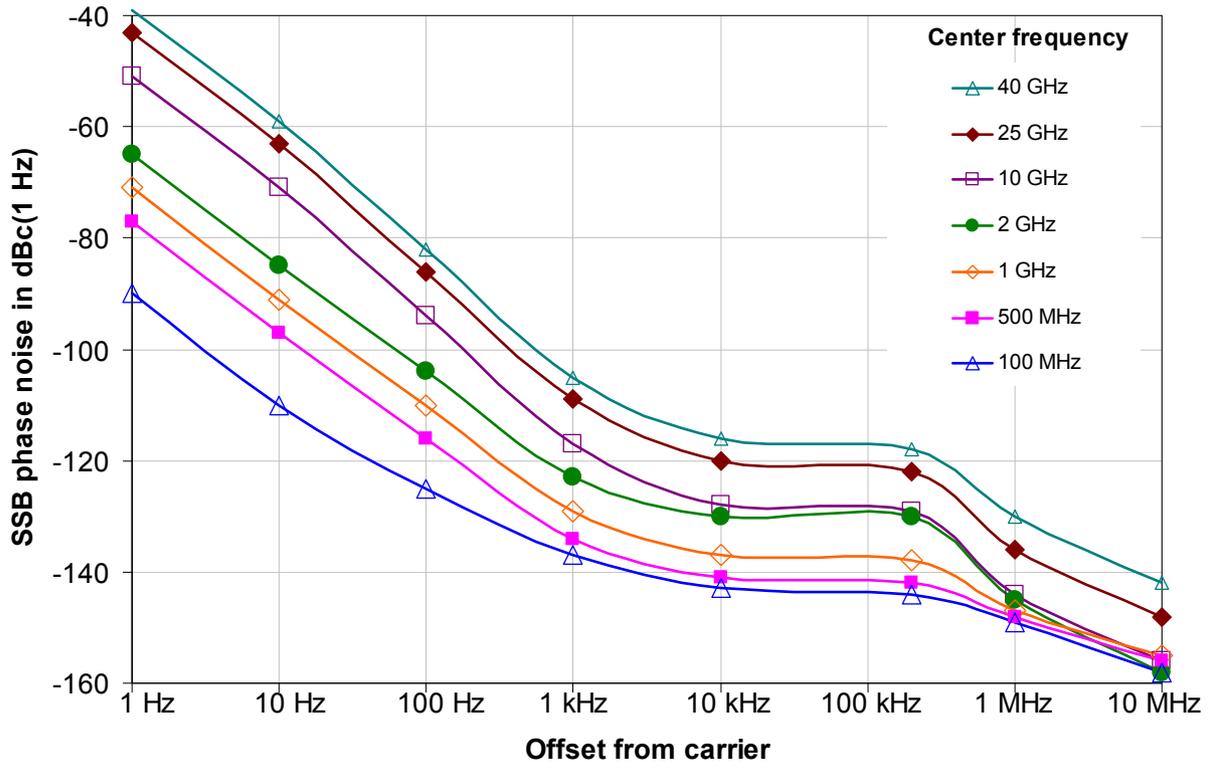

Typical phase noise at different center frequencies (with the R&S®FSW-B4 option for offsets ≤ 10 Hz).

### Sweep time

Sweep time range	span = 0 Hz	1 μs to 16000 s
	span ≥ 10 Hz	1 μs to 16000 s <sup>1</sup>
Sweep time accuracy	span = 0 Hz	±0.1 % (nom.)
	span ≥ 10 Hz	±3 % (nom.)

<sup>1</sup> The selected sweep time is the net data acquisition time (without the extra time needed for hardware settling or FFT processing).

## Resolution bandwidths

<b>Sweep filters and FFT filters</b>		
Resolution bandwidths (-3 dB)		1 Hz to 10 MHz in 1/2/3/5 sequence
	with R&S®FSW-B8 option, span = 0 Hz	20 MHz, 50 MHz, 80 MHz additionally
Bandwidth uncertainty		< 3 % (nom.)
Shape factor 60 dB:3 dB		< 5 (nom.)

<b>Channel filters</b>		
Bandwidths (-3 dB)	standard (RRC = root raised cosine)	100 Hz, 200 Hz, 300 Hz, 500 Hz 1/1.5/2/2.4/2.7/3/3.4/4/4.5/5/6/8.5/9/10/ 12.5/14/15/16/18 (RRC)/20/21/ 24.3 (RRC)/25/30/50/100/150/192/200/ 300/500 kHz 1/1.228/1.28 (RRC)/1.5/2/3/3.84 (RRC)/ 4.096 (RRC)/5/10 MHz
	with R&S®FSW-B8 option	20 MHz, 28 MHz, 40 MHz, 80 MHz additionally
Bandwidth accuracy		< 2 % (nom.)
Shape factor 60 dB:3 dB		< 2 (nom.)

<b>Video bandwidths</b>	standard	1 Hz to 10 MHz in 1/2/3/5 sequence
	with R&S®FSW-B8 option	20 MHz, 50 MHz, 80 MHz additionally

<b>Signal analysis bandwidth</b>	standard	10 MHz (nom.)
	with R&S®FSW-B28 option	20 MHz, 28 MHz (nom.) additionally
	with R&S®FSW-B40 option	20 MHz, 28 MHz, 40 MHz (nom.) additionally
	with R&S®FSW-B80 option	20 MHz, 28 MHz, 40 MHz, 80 MHz (nom.) additionally
	with R&S®FSW-B160 option	20 MHz, 28 MHz, 40 MHz, 80 MHz, 160 MHz (nom.) additionally

## Level

Display range	displayed noise floor up to +30 dBm
---------------	-------------------------------------

Max. input level		
DC voltage	AC coupled	50 V
	DC coupled	0 V
CW RF power	RF attenuation = 0 dB	20 dBm (= 0.1 W)
	RF attenuation ≥ 10 dB	
	without R&S®FSW-B25 option or with R&S®FSW-B25 option installed and mechanical attenuation ≥ 10 dB	30 dBm (= 1 W)
Pulse spectral density	RF attenuation = 0 dB, RF preamplifier off	97 dB $\mu$ V/MHz
Max. pulse voltage	without R&S®FSW-B25 option or electronic attenuation off	
	RF attenuation ≥ 10 dB	150 V
	with R&S®FSW-B25 option installed, electronic attenuation on	
	mechanical attenuation = 0 dB	25 V
	mechanical attenuation ≥ 10 dB	75 V
Max. pulse energy	without R&S®FSW-B25 option or electronic attenuation off	
	RF attenuation ≥ 10 dB, 10 $\mu$ s	1 mWs
	with R&S®FSW-B25 option installed, electronic attenuation on	
	mechanical attenuation ≥ 10 dB, 10 $\mu$ s	1 mWs

Intermodulation			
1 dB compression of input mixer (two-tone)	RF attenuation = 0 dB, RF preamplifier off		
	$f_{in} \leq 3$ GHz	+15 dBm (nom.)	
	$3$ GHz $< f_{in} \leq 8$ GHz	+10 dBm (nom.)	
	$f_{in} > 8$ GHz	+7 dBm (nom.)	
	with R&S®FSW-B24 option, RF attenuation = 0 dB, RF preamplifier on		
	$f_{in} \leq 3$ GHz	-13 dBm (nom.)	
	$3$ GHz $< f_{in} \leq 8$ GHz	-20 dBm (nom.)	
	$f_{in} > 8$ GHz	-23 dBm (nom.)	
	Third-order intercept point (TOI)	R&S®FSW8, R&S®FSW13, R&S®FSW26, R&S®FSW43, RF attenuation = 0 dB, level 2 $\times$ -15 dBm, $\Delta f > 5 \times$ RBW, YIG preselector on, RF preamplifier off	
		$f_{in} < 10$ MHz	28 dBm (nom.)
$10$ MHz $\leq f_{in} < 1$ GHz		> 25 dBm, typ. 30 dBm	
$1$ GHz $\leq f_{in} < 3$ GHz		> 20 dBm, typ. 25 dBm <sup>2</sup>	
$3$ GHz $\leq f_{in} < 8$ GHz		> 17 dBm, typ. 20 dBm	
R&S®FSW13, R&S®FSW26, RF attenuation = 0 dB, level 2 $\times$ -15 dBm, $\Delta f > 5 \times$ RBW, YIG preselector on, RF preamplifier off			
$f_{in} \geq 8$ GHz		> 12 dBm, typ. 17 dBm	
R&S®FSW43, RF attenuation = 0 dB, level 2 $\times$ -20 dBm, $\Delta f > 5 \times$ RBW, YIG preselector on, RF preamplifier off			
$8$ GHz $\leq f_{in} \leq 13,6$ GHz		> 8 dBm, typ. 11 dBm	
$13,6$ GHz $\leq f_{in} \leq 40$ GHz		> 10 dBm, typ. 15 dBm	
$f_{in} > 40$ GHz		12 dBm (nom.)	
R&S®FSW8, R&S®FSW13, R&S®FSW26 with R&S®FSW-B24 option, RF attenuation = 0 dB, level 2 $\times$ -50 dBm, $\Delta f > 5 \times$ RBW, YIG preselector on, RF preamplifier on			
$10$ MHz $\leq f_{in} < 1$ GHz		-10 dBm (nom.)	
$1$ GHz $\leq f_{in} < 8$ GHz		-13 dBm (nom.)	
$8$ GHz $\leq f_{in} \leq 26,5$ GHz		-15 dBm (nom.)	
R&S®FSW43 with R&S®FSW-B24 option, RF attenuation = 0 dB, level 2 $\times$ -55 dBm, $\Delta f > 5 \times$ RBW, YIG preselector on, RF preamplifier on			
$10$ MHz $\leq f_{in} < 1$ GHz		-5 dBm (nom.)	
$1$ GHz $\leq f_{in} < 4$ GHz		-10 dBm (nom.)	
$f_{in} > 4$ GHz		-20 dBm (nom.)	

<sup>2</sup> With R&S®FSW-B13 highpass filter option, highpass off. With highpass on, the TOI degrades by 5 dB (nom.).

Second-harmonic intercept point (SHI)	R&S®FSW8, R&S®FSW13, R&S®FSW26, RF attenuation = 0 dB, level = -5 dBm, YIG preselector on, RF preamplifier off	
	1 MHz < $f_{in}$ ≤ 350 MHz	> 50 dBm, typ. 62 dBm
	350 MHz < $f_{in}$ ≤ 500 MHz	> 70 dBm, typ. 80 dBm
	500 MHz < $f_{in}$ < 1.5 GHz <sup>3</sup>	> 47 dBm, typ. 52 dBm
	500 MHz < $f_{in}$ < 1.5 GHz <sup>4</sup>	> 62 dBm, typ. 70 dBm
	1.5 GHz ≤ $f_{in}$ ≤ 4 GHz	> 62 dBm, typ. 70 dBm
	4 GHz < $f_{in}$ ≤ 13.5 GHz	65 dBm (nom.)
	R&S®FSW43, RF attenuation = 0 dB, level = -5 dBm, YIG preselector on, RF preamplifier off	
	1 MHz < $f_{in}$ ≤ 500 MHz	> 45 dBm, typ. 55 dBm
	500 MHz < $f_{in}$ < 1.5 GHz <sup>3</sup>	> 47 dBm, typ. 56 dBm
	500 MHz < $f_{in}$ < 1.5 GHz <sup>4</sup>	> 52 dBm, typ. 60 dBm
	1.5 GHz ≤ $f_{in}$ ≤ 4 GHz	> 62 dBm, typ. 70 dBm
	4 GHz < $f_{in}$ ≤ 21.75 GHz	65 dBm (nom.)
	R&S®FSW8, R&S®FSW13, R&S®FSW26, R&S®FSW43 with R&S®FSW-B24 option, RF attenuation = 0 dB, level = -50 dBm, YIG preselector on, RF preamplifier on	
	50 MHz < $f_{in}$ ≤ 21.75 GHz	10 dBm (nom.)

<sup>3</sup> Without R&S®FSW-B13 highpass filter option or highpass off.

<sup>4</sup> With R&S®FSW-B13 highpass filter option, highpass on.

<b>Displayed average noise level of the R&amp;S®FSW8</b>		
	RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode log, sample detector, +5 °C to +40 °C, RF preamplifier off	
	2 Hz ≤ f ≤ 100 Hz	< -110 dBm, typ. -120 dBm
	100 Hz < f ≤ 1 kHz	< -120 dBm, typ. -130 dBm
	1 kHz < f < 9 kHz	< -135 dBm, typ. -147 dBm
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, RF preamplifier off, without R&S®FSW-B25 electronic attenuator option	
	9 kHz ≤ f ≤ 1 MHz	< -145 dBm, typ. -150 dBm
	1 MHz < f ≤ 1 GHz	< -150 dBm, typ. -154 dBm
	1 GHz < f < 3 GHz <sup>3</sup>	< -152 dBm, typ. -156 dBm
	1 GHz < f < 3 GHz <sup>4</sup>	< -155 dBm, typ. -160 dBm
	3 GHz ≤ f ≤ 8 GHz	< -152 dBm, typ. -156 dBm
	add 1 dB to the above values if R&S®FSW-B25 option is installed	
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, with R&S®FSW-B24 option, RF preamplifier = 30 dB, without R&S®FSW-B25 electronic attenuator option	
	10 MHz < f ≤ 50 MHz	-154 dBm (nom.)
	50 MHz < f ≤ 150 MHz	< -163 dBm, typ. -166 dBm
	150 MHz < f ≤ 8 GHz	< -166 dBm, typ. -169 dBm
	add 1 dB to the above values if R&S®FSW-B25 option is installed	
Improvement with noise cancellation	for noise-like signals	13 dB (nom.)

<b>Displayed average noise level of the R&amp;S®FSW13, R&amp;S®FSW26, without R&amp;S®FSW-B24 option</b>		
	RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode log, sample detector, +5 °C to +40 °C	
	2 Hz ≤ f ≤ 100 Hz	< -110 dBm, typ. -120 dBm
	100 Hz < f ≤ 1 kHz	< -120 dBm, typ. -130 dBm
	1 kHz < f < 9 kHz	< -135 dBm, typ. -147 dBm
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, f ≥ 8 GHz: YIG preselector on, without R&S®FSW-B25 electronic attenuator option	
	9 kHz ≤ f ≤ 1 MHz	< -145 dBm, typ. -150 dBm
	1 MHz < f ≤ 1 GHz	< -149 dBm, typ. -154 dBm
	1 GHz < f < 3 GHz <sup>3</sup>	< -151 dBm, typ. -156 dBm
	1 GHz < f < 3 GHz <sup>4</sup>	< -154 dBm, typ. -159 dBm
	3 GHz ≤ f < 8 GHz	< -151 dBm, typ. -156 dBm
	8 GHz ≤ f < 13.6 GHz	< -150 dBm, typ. -155 dBm
	13.6 GHz ≤ f < 18 GHz	< -149 dBm, typ. -153 dBm
	18 GHz ≤ f < 25 GHz	< -147 dBm, typ. -150 dBm
	25 GHz ≤ f < 26.5 GHz	< -143 dBm, typ. -146 dBm
	add 1 dB to the above values for frequencies < 8 GHz, 2 dB for frequencies ≥ 8 GHz, if R&S®FSW-B25 option is installed	
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector off, without R&S®FSW-B25 electronic attenuator option	
	8 GHz ≤ f < 13.6 GHz	< -150 dBm, typ. -155 dBm
	13.6 GHz ≤ f < 25 GHz	< -149 dBm, typ. -153 dBm
	25 GHz ≤ f < 26.5 GHz	< -147 dBm, typ. -150 dBm
	add 2 dB to the above values if R&S®FSW-B25 option is installed	
Improvement with noise cancellation	for noise-like signals	13 dB (nom.)

Displayed average noise level of the R&S®FSW13, R&S®FSW26, with R&S®FSW-B24 option		
	RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode log, sample detector, +5 °C to +40 °C, RF preamplifier off	
	2 Hz ≤ f ≤ 100 Hz	< -110 dBm, typ. -120 dBm
	100 Hz < f ≤ 1 kHz	< -120 dBm, typ. -130 dBm
	1 kHz < f < 9 kHz	< -135 dBm, typ. -147 dBm
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, f ≥ 8 GHz: YIG preselector on, RF preamplifier off, without R&S®FSW-B25 electronic attenuator option	
	9 kHz ≤ f ≤ 1 MHz	< -145 dBm, typ. -150 dBm
	1 MHz < f ≤ 1 GHz	< -149 dBm, typ. -154 dBm
	1 GHz < f < 3 GHz <sup>3</sup>	< -151 dBm, typ. -156 dBm
	1 GHz < f < 3 GHz <sup>4</sup>	< -154 dBm, typ. -159 dBm
	3 GHz ≤ f < 8 GHz	< -151 dBm, typ. -156 dBm
	8 GHz ≤ f < 13.6 GHz	< -149 dBm, typ. -154 dBm
	13.6 GHz ≤ f < 18 GHz	< -148 dBm, typ. -152 dBm
	18 GHz ≤ f < 25 GHz	< -145 dBm, typ. -149 dBm
	25 GHz ≤ f < 26.5 GHz	< -141 dBm, typ. -145 dBm
	add 1 dB to the above values for frequencies < 8 GHz, 2 dB for frequencies ≥ 8 GHz, if R&S®FSW-B25 option is installed	
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector off, RF preamplifier off, without R&S®FSW-B25 electronic attenuator option	
	8 GHz ≤ f < 13.6 GHz	< -149 dBm, typ. -154 dBm
	13.6 GHz ≤ f < 25 GHz	< -148 dBm, typ. -152 dBm
	25 GHz ≤ f < 26.5 GHz	< -145 dBm, typ. -149 dBm
	add 2 dB to the above values if R&S®FSW-B25 option is installed	
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector on, RF preamplifier = 30 dB, without R&S®FSW-B25 electronic attenuator option	
	10 MHz < f ≤ 50 MHz	-154 dBm (nom.)
	50 MHz < f ≤ 150 MHz	< -163 dBm, typ. -166 dBm
	150 MHz < f ≤ 8 GHz	< -166 dBm, typ. -169 dBm
	8 GHz < f ≤ 13.6 GHz	< -164 dBm, typ. -168 dBm
	13.6 GHz < f ≤ 22 GHz	< -162 dBm, typ. -166 dBm
	22 GHz < f ≤ 26.5 GHz	< -157 dBm, typ. -161 dBm
	add 1 dB to the above values for frequencies < 8 GHz, 2 dB for frequencies ≥ 8 GHz, if R&S®FSW-B25 option is installed	
Improvement with noise cancellation	for noise-like signals	13 dB (nom.)

Displayed average noise level of the R&S®FSW43, without R&S®FSW-B24 option		
	RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode log, sample detector, +5 °C to +40 °C	
	2 Hz ≤ f ≤ 100 Hz	< -110 dBm, typ. -120 dBm
	100 Hz < f ≤ 1 kHz	< -120 dBm, typ. -130 dBm
	1 kHz < f < 9 kHz	< -135 dBm, typ. -147 dBm
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, f ≥ 8 GHz: YIG preselector on	
	9 kHz ≤ f ≤ 1 MHz	< -145 dBm, typ. -150 dBm
	1 MHz < f ≤ 1 GHz	< -149 dBm, typ. -154 dBm
	1 GHz < f < 3 GHz <sup>3</sup>	< -151 dBm, typ. -156 dBm
	1 GHz < f < 3 GHz <sup>4</sup>	< -154 dBm, typ. -159 dBm
	3 GHz ≤ f < 8 GHz	< -151 dBm, typ. -156 dBm
	8 GHz ≤ f < 13.6 GHz	< -150 dBm, typ. -154 dBm
	13.6 GHz ≤ f < 18 GHz	< -149 dBm, typ. -153 dBm
	18 GHz ≤ f < 25 GHz	< -147 dBm, typ. -151 dBm
	25 GHz ≤ f ≤ 34 GHz	< -143 dBm, typ. -147 dBm
	34 GHz < f ≤ 40 GHz	< -140 dBm, typ. -144 dBm
	40 GHz < f ≤ 43.5 GHz	< -138 dBm, typ. -142 dBm
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector off	
	8 GHz ≤ f < 13.6 GHz	< -152 dBm, typ. -157 dBm
	13.6 GHz ≤ f < 18 GHz	< -151 dBm, typ. -156 dBm
	18 GHz ≤ f < 25 GHz	< -149 dBm, typ. -154 dBm
	25 GHz ≤ f ≤ 34 GHz	< -147 dBm, typ. -151 dBm
	34 GHz < f ≤ 40 GHz	< -144 dBm, typ. -148 dBm
	40 GHz < f ≤ 43.5 GHz	< -142 dBm, typ. -146 dBm
Improvement with noise cancellation	for noise-like signals	13 dB (nom.)

Displayed average noise level of the R&S®FSW43, with R&S®FSW-B24 option		
	RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode log, sample detector, +5 °C to +40 °C	
	2 Hz ≤ f ≤ 100 Hz	< -110 dBm, typ. -120 dBm
	100 Hz < f ≤ 1 kHz	< -120 dBm, typ. -130 dBm
	1 kHz < f < 9 kHz	< -135 dBm, typ. -147 dBm
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, f ≥ 8 GHz: YIG preselector on, RF preamplifier off	
	9 kHz ≤ f ≤ 1 MHz	< -145 dBm, typ. -150 dBm
	1 MHz < f ≤ 1 GHz	< -149 dBm, typ. -154 dBm
	1 GHz < f < 3 GHz <sup>3</sup>	< -150 dBm, typ. -155 dBm
	1 GHz < f < 3 GHz <sup>4</sup>	< -153 dBm, typ. -158 dBm
	3 GHz ≤ f < 8 GHz	< -150 dBm, typ. -155 dBm
	8 GHz ≤ f < 13.6 GHz	< -148 dBm, typ. -152 dBm
	13.6 GHz ≤ f < 18 GHz	< -147 dBm, typ. -151 dBm
	18 GHz ≤ f < 25 GHz	< -145 dBm, typ. -149 dBm
	25 GHz ≤ f ≤ 34 GHz	< -140 dBm, typ. -144 dBm
	34 GHz < f ≤ 40 GHz	< -137 dBm, typ. -141 dBm
	40 GHz < f ≤ 43.5 GHz	< -135 dBm, typ. -140 dBm
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector off, RF preamplifier off	
	8 GHz ≤ f < 13.6 GHz	< -150 dBm, typ. -155 dBm
	13.6 GHz ≤ f < 18 GHz	< -149 dBm, typ. -154 dBm
	18 GHz ≤ f < 25 GHz	< -147 dBm, typ. -152 dBm
	25 GHz ≤ f ≤ 34 GHz	< -144 dBm, typ. -149 dBm
	34 GHz < f ≤ 40 GHz	< -141 dBm, typ. -145 dBm
	40 GHz < f ≤ 43.5 GHz	< -139 dBm, typ. -144 dBm
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector on, RF preamplifier = 30 dB	
	100 kHz < f ≤ 1 MHz	< -160 dBm, typ. -163 dBm
	1 MHz < f ≤ 3 GHz	< -165 dBm, typ. -169 dBm
	3 GHz < f ≤ 8 GHz	< -162 dBm, typ. -166 dBm
	8 GHz < f ≤ 18 GHz	< -162 dBm, typ. -167 dBm
	18 GHz < f ≤ 26.5 GHz	< -161 dBm, typ. -166 dBm
	26.5 GHz < f ≤ 40 GHz	< -160 dBm, typ. -164 dBm
	40 GHz < f ≤ 43.5 GHz	< -157 dBm, typ. -162 dBm
Improvement with noise cancellation	for noise-like signals	13 dB (nom.)

Spurious responses		
	YIG preselector on for f ≥ 8 GHz, mixer level ≤ -10 dBm <sup>5</sup> , sweep optimization: auto or dynamic	
Image response	f <sub>in</sub> - 2 × 8997 MHz (1st IF)	< -90 dBc
	f <sub>in</sub> - 2 × 1317 MHz (2nd IF)	< -90 dBc
	f <sub>in</sub> - 2 × 37 MHz (3rd IF)	< -90 dBc
Intermediate frequency response	1 <sup>st</sup> IF (8997 MHz)	< -90 dBc
	2nd IF (1317 MHz)	< -90 dBc
	3 <sup>rd</sup> IF (37 MHz)	< -90 dBc
Residual spurious response	RF attenuation = 0 dB	
	f ≤ 1 MHz	< -90 dBm
	1 MHz < f < 8900 MHz	< -110 dBm
	f ≥ 8900 MHz	< -100 dBm
	f = receive frequency	
Local oscillators related spurious	10 Hz ≤ offset from carrier < 200 Hz	< -90 dBc + 20 log (f <sub>in</sub> /GHz)
	offset from carrier > 200 Hz	< -100 dBc + 20 log (f <sub>in</sub> /GHz)
Vibrational environmental stimuli	max. 0.21 g RMS	< -60 dBc + 20 log (f <sub>in</sub> /GHz) (nom.)

<sup>5</sup> Mixer level = signal level - RF attenuation + preamplifier gain.

<b>Level display</b>		
Logarithmic level axis		1 dB to 200 dB, in steps of 1/2/5
Linear level axis		10 % of reference level per level division, 10 divisions or logarithmic scaling
Number of traces		6
Trace detector		max. peak, min. peak, auto peak (normal), sample, RMS, average
Trace functions		clear/write, max. hold, min. hold, average, view
Setting range of reference level		-130 dBm to (-10 dBm + RF attenuation - RF preamplifier gain), in steps of 0.01 dB
Units of level axis	logarithmic level display	dBm, dB $\mu$ V, dBmV, dB $\mu$ A, dBpW
	linear level display	$\mu$ V, mV, $\mu$ A, mA, pW, nW

<b>Level measurement uncertainty</b>		
Absolute level uncertainty at 64 MHz	RBW = 10 kHz, level = -10 dBm, reference level = -10 dBm, RF attenuation = 10 dB	
	without R&S <sup>®</sup> FSW-B25 option or electronic attenuator off	< 0.2 dB ( $\sigma = 0.07$ dB)
	with R&S <sup>®</sup> FSW-B25 option, electronic attenuator on	< 0.4 dB ( $\sigma = 0.14$ dB)
Frequency response, referenced to 64 MHz, YIG preselector on	RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, RF preamplifier off, +20 °C to +30 °C, electronic attenuator off	
	2 Hz $\leq$ f < 9 kHz	< 1 dB (nom.)
	9 kHz $\leq$ f < 10 MHz	< 0.45 dB ( $\sigma = 0.17$ dB)
	10 MHz $\leq$ f < 3.6 GHz	< 0.3 dB ( $\sigma = 0.10$ dB)
	3.6 GHz $\leq$ f $\leq$ 8 GHz	< 0.5 dB ( $\sigma = 0.17$ dB)
	8 GHz < f < 22 GHz, span < 1 GHz	< 1.5 dB ( $\sigma = 0.50$ dB)
	22 GHz $\leq$ f $\leq$ 26.5 GHz, span < 1 GHz	< 2 dB ( $\sigma = 0.67$ dB)
	26.5 GHz < f $\leq$ 43.5 GHz, span < 1 GHz	< 2.5 dB ( $\sigma = 0.83$ dB)
	any RF attenuation or electronic attenuator on, +15 °C to +40 °C	
	2 Hz $\leq$ f < 9 kHz	< 1 dB (nom.)
	9 kHz $\leq$ f < 3.6 GHz	< 0.6 dB ( $\sigma = 0.20$ dB)
	3.6 GHz $\leq$ f $\leq$ 8 GHz	< 0.8 dB ( $\sigma = 0.27$ dB)
	8 GHz < f < 22 GHz, span < 1 GHz	< 2 dB ( $\sigma = 0.67$ dB)
	22 GHz $\leq$ f $\leq$ 26.5 GHz, span < 1 GHz	< 2.5 dB ( $\sigma = 0.83$ dB)
	26.5 GHz < f $\leq$ 43.5 GHz, span < 1 GHz	< 3 dB ( $\sigma = 1.0$ dB)
	RF attenuation $\leq$ 20 dB, RF preamplifier on, +20 °C to +30 °C	
	10 MHz $\leq$ f < 3.6 GHz	< 0.6 dB ( $\sigma = 0.2$ dB)
	3.6 GHz $\leq$ f $\leq$ 8 GHz	< 0.8 dB ( $\sigma = 0.27$ dB)
	8 GHz < f < 22 GHz, span < 1 GHz	< 2 dB ( $\sigma = 0.67$ dB)
	22 GHz $\leq$ f $\leq$ 26.5 GHz, span < 1 GHz	< 2.5 dB ( $\sigma = 0.83$ dB)
26.5 GHz < f $\leq$ 43.5 GHz, span < 1 GHz	< 3 dB ( $\sigma = 1.0$ dB)	
Frequency response, referenced to 64 MHz, YIG preselector off	RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, RF preamplifier off, +20 °C to +30 °C, electronic attenuator off	
	f < 8 GHz	same values as with preselector on
	8 GHz $\leq$ f < 22 GHz	< 1.5 dB ( $\sigma = 0.5$ dB)
	22 GHz $\leq$ f $\leq$ 26.5 GHz	< 2 dB ( $\sigma = 0.6$ dB)
	26.5 GHz < f $\leq$ 43.5 GHz, span < 1 GHz	< 2.5 dB ( $\sigma = 0.83$ dB)
	any RF attenuation or electronic attenuator on, +15 °C to +40 °C	
	f < 8 GHz	same values as with preselector on
	8 GHz $\leq$ f < 22 GHz	< 2 dB ( $\sigma = 0.6$ dB)
	22 GHz $\leq$ f $\leq$ 26.5 GHz	< 2.5 dB ( $\sigma = 0.75$ dB)
	26.5 GHz < f $\leq$ 43.5 GHz, span < 1 GHz	< 3 dB ( $\sigma = 1.0$ dB)
	RF attenuation $\leq$ 20 dB, RF preamplifier on, +20 °C to +30 °C	
	f < 8 GHz	same values as with preselector on
	8 GHz $\leq$ f < 22 GHz	< 2 dB ( $\sigma = 0.6$ dB)
	22 GHz $\leq$ f $\leq$ 26.5 GHz	< 2.5 dB ( $\sigma = 0.75$ dB)
26.5 GHz < f $\leq$ 43.5 GHz, span < 1 GHz	< 3 dB ( $\sigma = 1.0$ dB)	

Attenuator switching uncertainty	f = 64 MHz, 0 dB to 70 dB, referenced to 10 dB attenuation	< 0.2 dB ( $\sigma = 0.07$ dB)
Uncertainty of reference level setting	input mixer level $\leq -15$ dBm	0 dB <sup>6</sup>
	input mixer level $> -15$ dBm	< 0.1 dB (nom.)
Bandwidth switching uncertainty	referenced to RBW = 10 kHz	< 0.1 dB ( $\sigma = 0.04$ dB)

**Nonlinearity of displayed level**

Logarithmic level display	S/N > 16 dB, 0 dB $\leq$ level $\leq -70$ dB	< 0.1 dB ( $\sigma = 0.04$ dB)
	S/N > 16 dB, $-70$ dB < level $\leq -90$ dB	< 0.2 dB ( $\sigma = 0.08$ dB)
Linear level display	S/N > 16 dB, 0 dB to $-70$ dB	< 5 % of reference level (nom.)

**Total measurement uncertainty**

YIG preselector on	signal level = 0 dB to $-70$ dB below reference level, S/N > 20 dB, sweep time = "auto", RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, RF preamplifier off, electronic attenuator off, span/RBW < 100, 95 % confidence level, +20 °C to +30 °C	
	9 kHz $\leq$ f $\leq$ 10 MHz	$\pm 0.37$ dB
	10 MHz < f $\leq$ 3.6 GHz	$\pm 0.27$ dB
	3.6 GHz < f $\leq$ 8 GHz	$\pm 0.37$ dB
	8 GHz < f $\leq$ 22 GHz	$\pm 1.4$ dB
	22 GHz < f $\leq$ 26.5 GHz	$\pm 1.7$ dB
YIG preselector off	signal level = 0 dB to $-70$ dB below reference level, S/N > 20 dB, sweep time = "auto", RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, RF preamplifier off, electronic attenuator off, span/RBW < 100, 95 % confidence level, +20 °C to +30 °C	
	8 GHz $\leq$ f $\leq$ 22 GHz	$\pm 1.0$ dB
	22 GHz < f $\leq$ 26.5 GHz	$\pm 1.2$ dB
	26.5 GHz < f $\leq$ 43.5 GHz	$\pm 1.7$ dB

**Adjacent channel power dynamic range**

<b>Adjacent channel leakage ratio (ACLR)</b>	3GPP WCDMA, single carrier, 1 DPCH, carrier frequency = 2 GHz	
	noise cancellation off <sup>7</sup>	
	1st adjacent channel	-76 dB (nom.)
	2nd adjacent channel	-82 dB (nom.)
	noise cancellation on	
	1st adjacent channel	-88 dB (nom.)
	2nd adjacent channel	-90 dB (nom.)

<b>Optimum mixer level</b>	3GPP WCDMA, single carrier, 1 DPCH, carrier frequency = 2 GHz	
	noise cancellation off	
	1st adjacent channel	-5 dBm (nom.)
	2nd adjacent channel	0 dBm (nom.)
	noise cancellation on	
	1st adjacent channel	-12 dBm (nom.)
	2nd adjacent channel	-5 dBm (nom.)

**Measurement speed<sup>8</sup>**

Local measurement and display update rate	1001 sweep points	1.25 ms (800/s) (meas.)
Remote measurement, 1000 sweep averages <sup>9</sup>	1001 sweep points	1.0 ms (1000/s) (meas.)
Remote measurement and LAN transfer <sup>8</sup>		5 ms (200/s) (meas.)
Marker peak search		1.7 ms (meas.)
Center frequency tune and transfer <sup>8</sup>	f $\leq$ 8 GHz	15 ms (meas.)
	f > 8 GHz	65 ms (meas.)

<sup>6</sup> The reference level setting affects only the graphical representation of the measurement result on the display, not the measurement itself. The reference level setting causes no additional uncertainty in measurement results.

<sup>7</sup> Noise cancellation off represents the raw performance of the R&S®FSW without numeric compensation for its inherent noise.

<sup>8</sup> Sweep points set to 1001 points (= default), sweep optimization set to "speed".

<sup>9</sup> Measured with PC equipped with Intel® Core™ i7 CPU 2.8 GHz and Gbit LAN interface.

## Trigger functions

<b>Trigger</b>		
Trigger source		free run, video, external, IF power, RF power
Trigger offset	span $\geq$ 10 Hz	5 ns to 20 s
	span = 0 Hz	(–sweep time) to 20 s
Min. trigger offset resolution	span > 0 Hz	5 ns
	span = 0 Hz, trigger offset > 0	5 ns
	span = 0 Hz, trigger offset < 0	sweep time/number of sweep points
Max. deviation of trigger offset		5 ns
<b>IF power trigger</b>		
Sensitivity	min. signal power	–60 dBm + RF attenuation – RF preamplifier gain (nom.)
	max. signal power	–10 dBm + RF attenuation – RF preamplifier gain (nom.)
IF power trigger bandwidth	RBW > 500 kHz	20 MHz (nom.) <sup>10</sup>
	RBW $\leq$ 500 kHz, FFT	20 MHz (nom.)
	RBW $\leq$ 500 kHz, swept	6 MHz (nom.)
<b>RF power trigger</b>		
Sensitivity	min. signal power	–30 dBm + RF attenuation – RF preamplifier gain (nom.)
	max. signal power	+10 dBm + RF attenuation – RF preamplifier gain (nom.)
RF power trigger bandwidth	f $\leq$ 8 GHz	8 GHz (nom.)
	f > 8 GHz	500 MHz (nom.) <sup>11</sup>
<b>Gated sweep</b>		
Gate source		video, external, IF power, RF power
Gate delay		5 ns to 20 s, min. resolution 5 ns
Gate length		5 ns to 20 s, min. resolution 5 ns
Max. deviation of gate length		$\pm$ 5 ns

## Audio demodulator

<b>Demodulation</b>		
AF demodulation types		AM and FM
Audio output		loudspeaker and phone jack
Marker stop time in spectrum mode		100 ms to 60 s

## I/Q data

Memory length		max. 400 Msample I and Q
Word length of I/Q samples	sampling rate > 100 MHz or number of samples > 300 Msample	18 bit
	otherwise	24 bit
Sampling rate		100 Hz to 200 MHz
Max. signal analysis bandwidth (equalized)	standard	10 MHz
	with R&S®FSW-B28 option	28 MHz (nom.) <sup>11</sup>
	with R&S®FSW-B40 option	40 MHz (nom.) <sup>11</sup>
	with R&S®FSW-B80 option	80 MHz (nom.) <sup>11</sup>
	with R&S®FSW-B160 option	160 MHz (nom.) <sup>11</sup>

<sup>10</sup> Sweep optimization = "auto".

<sup>11</sup> YIG preselector off for f  $\geq$  8 GHz.

<b>Signal analysis bandwidth <math>\leq 80</math> MHz</b>		
Amplitude flatness	$(1.25 \times \text{signal analysis bandwidth}) \leq f_{\text{center}} < 8$ GHz	$\pm 0.3$ dB (nom.)
	$f_{\text{center}} \geq 8$ GHz, YIG preselector off	$\pm 0.5$ dB (nom.)
Deviation from linear phase	$(1.25 \times \text{signal analysis bandwidth}) \leq f_{\text{center}} < 8$ GHz	$\pm 1^\circ$ (nom.)
	$f_{\text{center}} \geq 8$ GHz, YIG preselector off	$\pm 2^\circ$ (nom.)
Level display nonlinearity		see "Display nonlinearity"
Level measurement uncertainty		see "Total measurement uncertainty, YIG preselector off"
Third-order intermodulation distortion		see "Third-order intercept point (TOI)"
ADC related spurious response	mixer level = $-30$ dBm <sup>12</sup>	
	analysis bandwidth $< 17$ MHz	$-100$ dBc (nom.)
	$17$ MHz $\leq$ analysis bandwidth $< 80$ MHz	$-80$ dBc (nom.)
Other spurious responses		see "Spurious responses"

<b>Signal analysis bandwidth 80 MHz to 160 MHz<sup>13</sup></b>		
Amplitude flatness	YIG preselector off for $f \geq 8$ GHz	
	$150$ MHz $\leq f_{\text{center}} < 4$ GHz	$\pm 0.5$ dB (nom.)
	$4$ GHz $\leq f_{\text{center}} < 8$ GHz	$\pm 0.7$ dB (nom.)
	$8$ GHz $\leq f_{\text{center}} < 26.5$ GHz	$\pm 1$ dB (nom.)
	$26.5$ GHz $\leq f_{\text{center}} \leq 43.5$ GHz	$\pm 2$ dB (nom.)
Deviation from linear phase	YIG preselector off for $f \geq 8$ GHz	
	$150$ MHz $\leq f_{\text{center}} < 4$ GHz	$\pm 1^\circ$ (nom.)
	$4$ GHz $\leq f_{\text{center}} < 8$ GHz	$\pm 2^\circ$ (nom.)
	$8$ GHz $\leq f_{\text{center}} < 26.5$ GHz	$\pm 2.5^\circ$ (nom.)
	$26.5$ GHz $\leq f_{\text{center}} \leq 43.5$ GHz	$\pm 4^\circ$ (nom.)
Level display nonlinearity	$0$ dB to $-70$ dB	$< 0.15$ dB (nom.)
Level measurement uncertainty		add $0.2$ dB (nom.) to the values in "Total measurement uncertainty, YIG preselector off"
Third-order intermodulation distortion	$150$ MHz $\leq f_{\text{center}} < 8$ GHz: two $-20$ dBm tones at input mixer within analysis bandwidth <sup>12</sup> , $f_{\text{center}} \geq 8$ GHz: two $-25$ dBm tones at input mixer within analysis bandwidth <sup>12</sup> , reference level = signal level + $6$ dB	$-70$ dBc (nom.)
Residual spurious response	RF attenuation $0$ dB, $f_{\text{center}} \geq 150$ MHz	$-90$ dBm (nom.)
ADC related spurious response	single tone within analysis bandwidth, mixer level = $-10$ dBm <sup>12</sup> , reference level = signal level, $f_{\text{center}} \geq 150$ MHz	$-70$ dBc (nom.)
Other spurious responses		see "Spurious responses"

<sup>12</sup> Level of a tone at the input mixer (also abbreviated as "mixer level") = signal level – RF attenuation + preamplifier gain.

<sup>13</sup> R&S®FSW-B160 option is required for 80 MHz to 160 MHz analysis bandwidth.

## Inputs and outputs

<b>RF input</b>		
Impedance		50 $\Omega$
Connector	R&S®FSW8, R&S®FSW13	N female
	R&S®FSW26	APC 3.5 mm male (compatible with SMA)
	R&S®FSW43	2.92 mm male (compatible with SMA)
VSWR of R&S®FSW8	RF attenuation $\leq$ 4 dB	
	10 MHz $\leq$ f $\leq$ 8 GHz	typ. 1.87 <sup>14</sup>
	5 dB $\leq$ RF attenuation $\leq$ 9 dB	
	10 MHz $\leq$ f < 1 GHz	< 1.5, typ. 1.20 <sup>14</sup>
	10 MHz $\leq$ f < 3.6 GHz	< 1.5, typ. 1.31 <sup>14</sup>
	3.6 GHz $\leq$ f $\leq$ 8 GHz	< 2.0, typ. 1.51 <sup>14</sup>
	RF attenuation $\geq$ 10 dB	
	10 MHz $\leq$ f < 1 GHz	< 1.2, typ. 1.09 <sup>14</sup>
	1 GHz $\leq$ f < 3.6 GHz	< 1.5, typ. 1.19 <sup>14</sup>
	3.6 GHz $\leq$ f $\leq$ 8 GHz	< 2.0, typ. 1.42 <sup>14</sup>
VSWR of R&S®FSW13	RF attenuation $\leq$ 4 dB	
	10 MHz $\leq$ f $\leq$ 13.6 GHz	typ. 1.87 <sup>14</sup>
	5 dB $\leq$ RF attenuation $\leq$ 9 dB	
	10 MHz $\leq$ f < 3.6 GHz	< 1.5, typ. 1.25 <sup>14</sup>
	3.6 GHz $\leq$ f $\leq$ 13.6 GHz	< 2.0, typ. 1.29 <sup>14</sup>
	RF attenuation $\geq$ 10 dB	
	10 MHz $\leq$ f < 1 GHz	< 1.2, typ. 1.10 <sup>14</sup>
	1 GHz $\leq$ f < 3.6 GHz	< 1.5, typ. 1.14 <sup>14</sup>
	3.6 GHz $\leq$ f $\leq$ 13.6 GHz	< 2.0, typ. 1.22 <sup>14</sup>
	VSWR of R&S®FSW26, R&S®FSW43	RF attenuation $\leq$ 4 dB
10 MHz $\leq$ f $\leq$ 26.5 GHz		typ. 1.87 <sup>14</sup>
26.5 GHz < f $\leq$ 40 GHz		typ. 2.0 <sup>14</sup>
40 GHz < f $\leq$ 43.5 GHz		2.0 (nom.)
5 dB $\leq$ RF attenuation $\leq$ 9 dB		
10 MHz $\leq$ f $\leq$ 3.5 GHz		< 1.5, typ. 1.24 <sup>14</sup>
3.5 GHz < f $\leq$ 8 GHz		< 1.8, typ. 1.26 <sup>14</sup>
8 GHz < f $\leq$ 18 GHz		< 1.8, typ. 1.39 <sup>14</sup>
18 GHz < f $\leq$ 26.5 GHz		< 2.0, typ. 1.43 <sup>14</sup>
26.5 GHz < f $\leq$ 40 GHz		< 2.5, typ. 1.8 <sup>14</sup>
40 GHz < f $\leq$ 43.5 GHz		2.0 (nom.)
RF attenuation $\geq$ 10 dB		
10 MHz $\leq$ f $\leq$ 3.5 GHz		< 1.2, typ. 1.12 <sup>14</sup>
3.5 GHz < f $\leq$ 8 GHz		< 1.5, typ. 1.19 <sup>14</sup>
8 GHz < f $\leq$ 18 GHz		< 1.5, typ. 1.25 <sup>14</sup>
18 GHz < f $\leq$ 26.5 GHz		< 2.0, typ. 1.37 <sup>14</sup>
26.5 GHz < f $\leq$ 40 GHz	< 2.5, typ. 1.7 <sup>14</sup>	
40 GHz < f $\leq$ 43.5 GHz	2.0 (nom.)	
Setting range of attenuator		0 dB to 79 dB, in 1 dB steps <sup>15</sup>

<b>Probe power supply</b>		
Supply voltages		+15 V DC, -12.6 V DC and ground, max. 150 mA (nom.)

<b>Noise source control</b>		
Connector		BNC female
Output voltage		0 V/28 V, max. 100 mA, switchable (nom.)

<b>Power sensor</b>		
Connector		6-pin LEMOSA female for R&S®NRP-Zxx power sensors

<sup>14</sup> Typical VSWR performance: performance expected to be met in 95 % of the cases with a confidence level of 95 %, temperature +20 °C to +30 °C, input set to "DC coupling". These values are not warranted and are subject to modification if a significant change in the statistical behavior of production instruments is observed.

<sup>15</sup> Mechanical RF attenuator: 5 dB steps. Electronic IF attenuator: 1 dB steps.

<b>USB interface</b>		7 ports, type A plug, version 2.0
		1 port, type B plug, version 2.0

<b>AF output</b>		
Connector		3.5 mm mini-jack
Output impedance		10 $\Omega$ (nom.)
Open-circuit voltage		up to 1.5 V, adjustable

<b>External trigger/gate</b>		
Number of ports		1 $\times$ input, 2 $\times$ input/output, selectable
Connector		BNC female
Trigger input voltage		0.5 V to 3.5 V (nom.)
Trigger output voltage		TTL-compatible, 0 V/5 V (nom.)
Impedance		10 k $\Omega$ (nom.)

<b>Reference input 1 MHz to 20 MHz</b>		
Connector		BNC female
Impedance		50 $\Omega$ (nom.)
Input frequency range		1 MHz $\leq f_{in} \leq$ 20 MHz, in 1 Hz steps
Required level		> 0 dBm

<b>Reference input 100 MHz</b>		
Connector		SMA female
Impedance		50 $\Omega$ (nom.)
Input frequency range		100 MHz
Required level		0 dBm to 10 dBm

<b>Reference output 10 MHz</b>		
Connector		BNC female
Impedance		50 $\Omega$ (nom.)
Output frequency		10 MHz
Level		10 dBm (nom.)

<b>Reference output 1 MHz to 20 MHz</b>		
Connector		BNC female
Impedance		50 $\Omega$ (nom.)
Output frequency	internal reference	not active
	external reference	same as reference input signal
Level		same as reference input signal

<b>Reference output 100 MHz</b>		
Connector		SMA female
Impedance		50 $\Omega$ (nom.)
Output frequency		100 MHz
Level		6 dBm (nom.)

<b>Reference output 640 MHz</b>		
Connector		SMA female
Impedance		50 $\Omega$ (nom.)
Output frequency		640 MHz
Level		16 dBm (nom.)

<b>IF/video output</b>		
Connector		BNC female, 50 $\Omega$ (nom.)
<b>IF out</b>		
Bandwidth		equal to RBW setting
IF frequency		(RBW/2) to (240 MHz – RBW/2)
Output level	center frequency > 10 MHz, span = 0 Hz or I/Q Analyzer on, signal at reference level and center frequency	0 dBm (nom.)

<b>Video out</b>		
Bandwidth		equal to VBW setting
Output scaling	log. display scale	logarithmic
	lin. display scale	linear
Output level	center frequency > 10 MHz, span = 0 Hz, signal at reference level and center frequency	1 V, open circuit (nom.)

<b>IF wide output (with R&amp;S®FSW-B160 option only)</b>		
Connector		BNC female, 50 Ω (nom.)
<b>IF out</b>		
IF frequency	center frequency ≥ 200 MHz	50 MHz to 550 MHz (nom.)
Max. bandwidth (6 dB)	YIG preselector off	500 MHz
Output level	RF attenuation auto, reference level ≥ -15 dBm, signal level = reference level	-20 dBm (nom.)

<b>Aux port</b>		
Connector		9-pin D-Sub male
Output		TTL-compatible, 0 V/5 V (nom.), max. 15 mA (nom.)
Input		TTL-compatible, max. 5 V (nom.)

<b>IEC/IEEE bus control</b>		
Command set		interface in line with IEC 625-2 (IEEE 488.2) SCPI 1997.0
Connector		24-pin Amphenol female
Interface functions		SH1, AH1, T6, L4, SR1, RL1, PP1, DC1, DT1, C0

<b>LAN interface</b>		
Connector		10/100/1000BaseT RJ-45

<b>External monitor</b>		
Connector		DVI-D, DisplayPort Rev 1.1

<b>Synchronization input</b>		
Connector		HDMI

<b>Synchronization output</b>		
Connector		HDMI

## General data

<b>Display</b>		30.7 cm (12.1") WXGA color touchscreen
Resolution		1280 × 800 pixel (WXGA resolution)
Pixel failure rate		$< 1 \times 10^{-5}$

<b>Data storage</b>		
Internal	standard	solid state disk $\geq 8$ Gbyte
External		supports USB 2.0 compatible memory devices

<b>Temperature</b>		
Temperature	operating temperature range	+5 °C to +50 °C
	permissible temperature range	0 °C to +55 °C
	storage temperature range	-40 °C to +70 °C
Climatic loading		+40 °C at 90 % rel. humidity, in line with EN 60068-2-30, without condensation

<b>Mechanical resistance</b>		
Vibration	sinusoidal	5 Hz to 55 Hz displacement: 0.15 mm constant amplitude (1.8 g at 55 Hz); 55 Hz to 150 Hz acceleration: 0.5 g constant in line with EN 60068-2-6
	random	10 Hz to 300 Hz, acceleration 1.2 g (RMS), in line with EN 60068-2-64
Shock		40 g shock spectrum, in line with MIL-STD-810E method no. 516.4, procedure I, MIL-PRF-28800F, class 3

<b>EMC</b>		in line with EMC Directive 2004/108/EC including: IEC/EN 61326-1 <sup>16, 17</sup> IEC/EN 61326-2-1 CISPR 11/EN 55011 <sup>16</sup> IEC/EN 61000-3-2 IEC/EN 61000-3-3
------------	--	--

<b>Recommended calibration interval</b>		1 year
---	--	--------

<b>Power supply</b>		
AC input voltage range		100 V to 240 V
AC supply frequency		50 Hz to 60 Hz / 400 Hz,
Max. input current		7.3 A (100 V) to 4.6 A (240 V)
Power consumption	R&S®FSW8	150 W without options, 250 W with all options (meas.)
	R&S®FSW13, R&S®FSW26	175 W without options, 275 W with all options (meas.)
	R&S®FSW43	200 W without options, 300 W with all options (meas.)
Safety		in line with IEC 61010-1, EN 61010-1, UL 61010-1, CAN/CSA-C22.2 No. 61010-1-04
Test mark		VDE-GS, cCSA <sub>US</sub>

<sup>16</sup> Emission limits for class B equipment.

<sup>17</sup> Immunity test requirement for industrial environment (EN 61326 table 2).

<b>Dimensions and weight</b>		
Dimensions (nom.)	W × H × D, including front handles and rear feet	462 mm × 240 mm × 504 mm (18.15 in × 9.44 in × 19.81 in)
Net weight without options (nom.)	R&S®FSW8	18.6 kg (41.01 lb)
	R&S®FSW13	20.2 kg (44.53 lb)
	R&S®FSW26	20.2 kg (44.53 lb)
	R&S®FSW43	20.9 kg (46.07 lb)

## Options

### R&S® FSW-B13 highpass filters

Frequency		
Frequency range	filter 1	1 GHz to 1.75 GHz
	filter 2	1.75 GHz to 3 GHz

Stopband attenuation		
500 MHz to 875 MHz	filter 1	> 20 dB (nom.)
875 MHz to 1.5 GHz	filter 2	> 20 dB (nom.)

Other specifications		
Level measurement uncertainty		see base unit specification
Displayed average noise level		
Intermodulation		
Measurement uncertainty		

### R&S® FSW-B17 digital baseband interface

I/Q data IN		
Interface		LVDS
	connector	26-pin female MDR (Mini D Ribbon)
Transfer protocol		Rohde & Schwarz digital I/Q Interface <sup>18</sup>
User data	sample rate	100 sample/s to 100 Msample/s (nom.)
	resolution	18 bit for I and 18 bit for Q
	general purpose signals	2 bit

I/Q data OUT		
Interface		LVDS
	connector	26-pin female MDR (Mini D Ribbon)
Transfer protocol		Rohde & Schwarz digital I/Q Interface <sup>18</sup>
User data	sample rate	100 sample/s to 100 Msample/s (nom.)
	resolution	20 bit for I and 20 bit for Q
	Max. I/Q bandwidth	
	standard	10 MHz
	with R&S® FSW-B28 option	28 MHz
	with R&S® FSW-B40 option	40 MHz
	with R&S® FSW-B80 option	80 MHz
	with R&S® FSW-B160 option	80 MHz

### R&S® FSW-B21 LO/IF connections for external mixers (for R&S® FSW43 only)

LO signal		
Frequency range		7.65 GHz to 17.45 GHz
Level	+20 °C to +30 °C	+15.5 dBm ± 1 dB
	+5 °C to +40 °C	+15.5 dBm ± 3 dB

IF input		
IF frequency	set signal analysis bandwidth	
	≤ 80 MHz, bandwidth dependent	1310 MHz to 1330 MHz
	> 80 MHz	1530 MHz
Full-scale level	compression < 1 dB	
	2-port mixer (LO output/IF input, front panel)	-20 dBm (nom.)
	3-port mixer (IF input, front panel)	-20 dBm (nom.)

<sup>18</sup> Rohde & Schwarz Digital IQ Interface is a Rohde & Schwarz company standard for the transmission of digital I/Q data. It is supported by a wide range of instruments (signal generators, signal analyzers and communications testers and the R&S® EX-IQ-BOX)

Level uncertainty	IF input level = reference level = -25 dBm, RBW = 30 kHz, mixer conversion loss set to 0 dB, 2-port mixer, LO output/IF input connector (front panel)	
	+20 °C to +30 °C	< 1 dB
	+5 °C to +40 °C	< 3 dB
	IF input level = reference level = -25 dBm, RBW = 30 kHz, mixer conversion loss set to 0 dB, 3-port mixer, IF input connector (front panel)	
	+20 °C to +30 °C	< 1 dB
	+5 °C to +40 °C	< 3 dB

<b>Inputs and outputs</b>		
LO output/IF input		SMA female, 50 Ω
IF input		SMA female, 50 Ω

## R&S® FSW-B24 RF preamplifier

<b>Frequency</b>		
Frequency range	R&S®FSW8	100 kHz to 8 GHz
	R&S®FSW13	100 kHz to 13.6 GHz
	R&S®FSW26	100 kHz to 26.5 GHz
	R&S®FSW43	100 kHz to 43.5 GHz

<b>Setting range</b>		
RF preamplifier gain	R&S®FSW8, R&S®FSW13	15 dB/30 dB (nom.) (selectable)
	R&S®FSW26, R&S®FSW43	30 dB (nom.)

<b>Other specifications</b>		
Level measurement uncertainty		see base unit specification
Displayed average noise level		
Intermodulation		
Measurement uncertainty		

## R&S® FSW-B25 electronic attenuator

<b>Frequency</b>		
Frequency range	R&S®FSW8	10 MHz to 8 GHz
	R&S®FSW13, R&S®FSW26	10 MHz to 13.6 GHz

<b>Setting range</b>		0 dB to 30 dB, in 1 dB steps <sup>19</sup>
----------------------	--	--

<b>Level measurement uncertainty</b>		see base unit specification
--------------------------------------	--	-----------------------------

<b>Displayed average noise level</b>	electronic attenuator on	the specification of the base unit degrades by 3 dB + 0.25 dB × f / 1 GHz (nom.)
--------------------------------------	--------------------------	--

<b>Intermodulation</b>		
Third-order intercept point (TOI)	electronic attenuator off or electronic attenuator on and RF attenuation = 0 dB	see base unit specification
	electronic attenuator on, RF attenuation = 30 dB	
	10 MHz to 500 MHz	30 dBm (nom.)
	500 MHz to 13.6 GHz	40 dBm (nom.)

<sup>19</sup> Electronic RF attenuator: 5 dB steps. Electronic IF attenuator: 1 dB steps.

## R&S®FSW-B71 analog baseband inputs, R&S®FSW-B71E 80 MHz analysis bandwidth for analog baseband inputs

Frequency		
Frequency range (equalized)	R&S®FSW-B71	
	I only, Q only	DC to 40 MHz
	I + jQ	-40 MHz to +40 MHz
	R&S®FSW-B71E	
	I only, Q only	DC to 80 MHz
	I + jQ	-80 MHz to +80 MHz

Spectral purity		
Phase noise	offset 1 kHz	-134 dBc (1 Hz) (nom.)
	offset 10 kHz	-138 dBc (1 Hz) (nom.)
	offset ≥100 kHz	-144 dBc (1 Hz) (nom.)

Inputs		
Connectors		I, $\bar{I}$ , Q, $\bar{Q}$
Maximum safe input voltage	any input, sum of DC + AC	±4 V
Input voltage range (full scale)	peak voltage	±2 V, ±1 V, ±0.5 V, ±0.25 V
Max. common mode input range		-3 V to +3 V
Input impedance	single ended	50 Ω (nom.)
	differential	100 Ω (nom.)
	common mode at DC	20 kΩ (nom.)
Input return loss	0 Hz to 40 MHz	-35 dB (nom.)
	40 MHz to 80 MHz	-30 dB (nom.)
	(R&S®FSW-B71E only)	

Amplitude		
Absolute amplitude accuracy	$f_{\text{input}} = 1 \text{ MHz}$ , input voltage = full scale -6dB	±0.15 dB
Amplitude linearity	0 dB to -80 dB relative to full scale	±0.1 dB (nom.)
Frequency response		
Amplitude	relative to 1 MHz	
	0 Hz to 40 MHz	±0.15 dB
	40 MHz to 80 MHz (R&S®FSW-B71E only)	±0.25 dB
Deviation from linear phase	0 Hz to 40 MHz	±1 degree (nom.)
	40 MHz to 80 MHz	±2 degree (nom.)
	(R&S®FSW-B71E only)	
Channel match (I/Q imbalance)		
Amplitude match accuracy	0 Hz to 20 MHz	±0.06 dB (2σ)
	20 MHz to 40 MHz	±0.1 dB (2σ)
	40 MHz to 80 MHz	±0.15 dB (2σ)
	(R&S®FSW-B71E only)	
Phase match accuracy	0 Hz to 20 MHz	±0.3 degree (nom.)
	20 MHz to 40 MHz	±0.6 degree (nom.)
	40 MHz to 80 MHz	±1 degree (nom.)
	(R&S®FSW-B71E only)	

<b>Dynamic Range</b>		
Crosstalk		-80 dB (nom.)
Signal to noise ratio	any input range, relative to full scale	145 dBc (1 Hz) (nom.)
Displayed average noise level (rms)	2 MHz to 80 MHz	
	range	
	±2 V peak	-130 dBm (1 Hz) (72 nV ( $\sqrt{1 \text{ Hz}}$ )) nom.
	±1 V peak	-136 dBm (1 Hz) (36 nV ( $\sqrt{1 \text{ Hz}}$ )) nom.
	±0.5 V peak	-142 dBm (1 Hz) (18 nV ( $\sqrt{1 \text{ Hz}}$ )) nom.
	±0.25 V peak	-148 dBm (1 Hz) (9 nV ( $\sqrt{1 \text{ Hz}}$ )) nom.
Residual DC (I/Q offset)	relative to full scale	-54 dB (nom.)
Residual response	range ±0.25 V peak	-90 dBm (nom.)
Spurious response	with full scale input signal	
	0 Hz to 40 MHz	-75 dBc (nom.)
	40 MHz to 80 MHz (R&S®FSW-B71E only)	-70 dBc (nom.)
Third order intermodulation distortion	two CW signals, voltage = full scale -6 dB (each signal)	
	0 Hz to 40 MHz	-80 dBc (nom.)
	40 MHz to 80 MHz (R&S®FSW-B71E only)	
	differential	-80 dBc (nom.)
	single ended	-74 dBc (nom.)

<b>Probes</b>		
Probes supported on connectors I and Q	active single ended probes	R&S®RT-ZS10E
		R&S®RT-ZS10
		R&S®RT-ZS20
		R&S®RT-ZS30
		R&S®RT-ZS60
	active differential probes	R&S®RT-ZD20
		R&S®RT-ZD30
R&S®RT-ZD40		
<b>RF measurements using probes</b>		
Supported connector	"Input source RF" set to "Baseband input I"	I
Maximum input frequency		5 GHz <sup>20</sup>
Frequency response	see probe specification for frequency response of probe	add the probe frequency response to the R&S®FSW frequency response specified in section "Total measurement uncertainty"

<sup>20</sup> Maximum frequency supported by the connector. To identify the maximum achievable input frequency when using a probe, the probe specification must be taken into account.

## Ordering information

Designation	Type	Order No.
Signal and Spectrum Analyzer, 2 Hz to 8 GHz	R&S®FSW8	1312.8000.08
Signal and Spectrum Analyzer, 2 Hz to 13.6 GHz	R&S®FSW13	1312.8000.13
Signal and Spectrum Analyzer, 2 Hz to 26.5 GHz	R&S®FSW26	1312.8000.26
Signal and Spectrum Analyzer, 2 Hz to 43.5 GHz	R&S®FSW43	1312.8000.43
<b>Accessories supplied</b>		
Power cable, Quick Start Guide and CD-ROM (with operating manual and service manual)		
R&S®FSW26: adapter 3.5 mm (APC3.5-compatible) female/female		
R&S®FSW43: adapter 2.92 mm female/female		

## Options

Designation	Type	Order No.	Retrofittable	Remarks
OCXO Precision Frequency Reference	R&S®FSW-B4	1313.0703.02	yes	user-retrofittable
Resolution Bandwidth > 10 MHz	R&S®FSW-B8	1313.2464.26	no	for the R&S®FSW8, R&S®FSW13, and R&S®FSW26, with span = 0 Hz. The signal analysis bandwidth is defined by the R&S®FSW-B28/-B40/-B80 and -B160 options, not by the R&S®FSW-B8 option
Resolution Bandwidth > 10 MHz	R&S®FSW-B8	1313.2464.02	no	with span = 0 Hz. The signal analysis bandwidth is defined by the R&S®FSW-B28/-B40 and -B80 options, not by the R&S®FSW-B8 option
Highpass Filter for Harmonic Measurements	R&S®FSW-B13	1313.0761.02	yes	user-retrofittable
Digital Baseband Interface	R&S®FSW-B17	1313.0784.02	yes	user-retrofittable
Spare Solid State Drive (removable hard drive)	R&S®FSW-B18	1313.0790.02	yes	user-retrofittable
LO/IF connections for external mixers	R&S®FSW-B21	1313.1100.43	yes	for the R&S®FSW43. Contact service center
RF Preamp, 100 kHz to 13.6 GHz	R&S®FSW-B24	1313.0832.13	yes	for the R&S®FSW8/13. Contact service center
RF Preamp, 100 kHz to 26.5 GHz	R&S®FSW-B24	1313.0832.26	yes	for the R&S®FSW26. Contact service center
RF Preamp, 100 kHz to 43.5 GHz	R&S®FSW-B24	1313.0832.43	yes	for the R&S®FSW43. Contact service center
Electronic Attenuator, 1 dB steps	R&S®FSW-B25	1313.0990.02	yes	for the R&S®FSW8/13/26. Contact service center
USB Mass Memory Write Protection	R&S®FSW-B33	1313.3602.02	no	pre-installation ex factory
28 MHz Analysis Bandwidth	R&S®FSW-B28	1313.1645.02	yes	user-retrofittable
40 MHz Analysis Bandwidth	R&S®FSW-B40	1313.0861.02	yes	user-retrofittable
80 MHz Analysis Bandwidth	R&S®FSW-B80	1313.0878.02	yes	user-retrofittable
160 MHz Analysis Bandwidth	R&S®FSW-B160	1313.1668.02	yes	contact service center
Analog Baseband Inputs, 40 MHz Analysis Bandwidth	R&S®FSW-B71	1313.1651.13	yes	for the R&S®FSW8 and R&S®FSW13. Contact service center
Analog Baseband Inputs, 40 MHz Analysis Bandwidth	R&S®FSW-B71	1313.1651.26	yes	for the R&S®FSW26/43. Contact service center
80 MHz Analysis Bandwidth for Analog Baseband Inputs	R&S®FSW-B71E	1313.6547.02	yes	R&S®FSW-B71 required. User-retrofittable

<b>Firmware</b>				
Pulse Measurements	R&S®FSW-K6	1313.1322.02		
Analog Modulation Analysis for AM/FM/φM	R&S®FSW-K7	1313.1339.02		
GSM/EDGE/EDGE Evolution/VAMOS Measurements	R&S®FSW-K10	1313.1368.02		
Multicarrier Group Delay Measurements	R&S®FSW-K17	1313.4150.02		
Noise Figure Measurements	R&S®FSW-K30	1313.1380.02		
Phase Noise Measurements	R&S®FSW-K40	1313.1397.02		
Vector Signal Analysis	R&S®FSW-K70	1313.1416.02		
3GPP FDD (WCDMA) BS Measurements (incl. HSDPA and HSDPA+)	R&S®FSW-K72	1313.1422.02		
3GPP FDD (WCDMA) MS Measurements (incl. HSUPA and HSUPA+)	R&S®FSW-K73	1313.1439.02		
TD-SCDMA BS Measurements	R&S®FSW-K76	1313.1445.02		
TD-SCDMA UE Measurements	R&S®FSW-K77	1313.1451.02		
CDMA2000® BS Measurements	R&S®FSW-K82	1313.1468.02		
CDMA2000® MS Measurements	R&S®FSW-K83	1313.1474.02		
1xEV-DO BS Measurements	R&S®FSW-K84	1313.1480.02		
1xEV-DO MS Measurements	R&S®FSW-K85	1313.1497.02		
802.11a/b/g Measurements	R&S®FSW-K91	1313.1500.02		To support signal analysis bandwidths > 10 MHz, one of the options R&S®FSW-B28/-B40/-B80/-B160 is needed.
802.11n Measurements	R&S®FSW-K91N	1313.1516.02		Requires R&S®FSW-K91.
802.11ac Measurements	R&S®FSW-K91AC	1313.4209.02		To support signal analysis bandwidths > 10 MHz, one of the options R&S®FSW-B28/-B40/-B80/-B160 is needed.
EUTRA/LTE FDD Downlink Measurements	R&S®FSW-K100	1313.1545.02		To support signal analysis bandwidths > 10 MHz, one of the options R&S®FSW-B28/-B40/-B80/-B160 is needed.
EUTRA/LTE TDD Downlink Measurements	R&S®FSW-K104	1313.1574.02		
<b>PC software</b>				
OFDM Vector Signal Analysis Software	R&S®FSQ-K96	1310.0202.02		spectrum analyzer required
OFDM Vector Signal Analysis Software	R&S®FSQ-K96PC	1310.0219.02		usable with or without spectrum analyzer
EUTRA/LTE FDD Downlink PC Software	R&S®FS-K100PC	1309.9916.02		
EUTRA/LTE Uplink FDD PC Software	R&S®FS-K101PC	1309.9922.02		
EUTRA/LTE Downlink MIMO PC Software (incl. LTE-Advanced)	R&S®FS-K102PC	1309.9939.02		
EUTRA/LTE Uplink MIMO PC Software (incl. LTE-Advanced)	R&S®FS-K103PC	1309.9945.02		
EUTRA/LTE TDD Downlink PC Software	R&S®FS-K104PC	1309.9951.02		
EUTRA/LTE TDD Uplink PC Software	R&S®FS-K105PC	1309.9968.02		
Distortion Analysis PC Software	R&S®FS-K130PC	1310.0090.02		

## Upgrades

Designation	Type	Order No.	Retrofittable	Remarks
Analysis Bandwidth Upgrade from 28 MHz to 40 MHz	R&S®FSW-U40	1313.5205.02	yes	user-retrofittable, R&S®FSW-B28 required
Analysis Bandwidth Upgrade from 40 MHz to 80 MHz	R&S®FSW-U80	1313.5211.02	yes	user-retrofittable, R&S®FSW-B40 or R&S®FSW-U40 required
Analysis Bandwidth Upgrade from 80 MHz to 160 MHz	R&S®FSW-U160	1313.5754.02	yes	contact service center, R&S®FSW-B80 or R&S®FSW-U80 required

## Service options

Service options		
Extended Warranty, one year	R&S®WE1FSW	Please contact your local Rohde & Schwarz sales office.
Extended Warranty, two years	R&S®WE2FSW	
Extended Warranty, three years	R&S®WE3FSW	
Extended Warranty, four years	R&S®WE4FSW	
Extended Warranty with Calibration Coverage, one year	R&S®CW1FSW	
Extended Warranty with Calibration Coverage, two years	R&S®CW2FSW	
Extended Warranty with Calibration Coverage, three years	R&S®CW3FSW	
Extended Warranty with Calibration Coverage, four years	R&S®CW4FSW	

### Extended warranty with a term of one to four years (WE1 to WE4)

Repairs carried out during the contract term are free of charge <sup>21</sup>. Necessary calibration and adjustments carried out during repairs are also covered. Simply contact the forwarding agent we name; your product will be picked up free of charge and returned to you in top condition a couple of days later.

### Extended warranty with calibration (CW1 to CW4)

Enhance your extended warranty by adding calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated, inspected and maintained during the term of the contract. It includes all repairs <sup>21</sup> and calibration at the recommended intervals as well as any calibration carried out during repairs or option upgrades.

<sup>21</sup> Excluding defects caused by incorrect operation or handling and force majeure. Wear-and-tear parts are not included.

## Recommended extras

Designation	Type	Order No.
Headphones		0708.9010.00
IEC/IEEE Bus Cable, 1 m	R&S®PCK	0292.2013.10
IEC/IEEE Bus Cable, 2 m	R&S®PCK	0292.2013.20
19" Rack Adapter	R&S®ZZA-KN5	1175.3040.00
<b>Matching Pads, 50/75 Ω</b>		
L section, matching at both ends	R&S®RAM	0358.5414.02
Series resistor, 25 Ω, matching at one end (taken into account in instrument function RF INPUT 75 Ω)	R&S®RAZ	0358.5714.02
<b>High-Power Attenuators</b>		
100 W, 3/6/10/20/30 dB, 1 GHz	R&S®RBU100	1073.8495.xx (xx = 03/06/10/20/30)
50 W, 3/6/10/20/30 dB, 2 GHz	R&S®RBU50	1073.8695.xx (xx = 03/06/10/20/30)
50 W, 20 dB, 6 GHz	R&S®RDL50	1035.1700.52
<b>Connectors and cables</b>		
Probe power connector, 3-pin		1065.9480.00
N-Type Adapter for R&S®RT-Zxx oscilloscope probes	R&S®RT-ZA9	1417.0909.02
Cable for connecting digital baseband interfaces of Rohde & Schwarz instruments (accessory for R&S®FSW-B17)	R&S®SMU-Z6	1415.0201.02
<b>DC blocks</b>		
DC Block, 10 kHz to 18 GHz (N type)	R&S®FSE-Z4	1084.7443.02
<b>External harmonic mixers (for R&amp;S®FSW43 with R&amp;S®FSW-B21 option)</b>		
Harmonic Mixer 40 GHz to 60 GHz	R&S®FS-Z60	1089.0799.02
Harmonic Mixer 50 GHz to 75 GHz	R&S®FS-Z75	1089.0847.02
Harmonic Mixer 60 GHz to 90 GHz	R&S®FS-Z90	1089.0899.02
Harmonic Mixer 75 GHz to 110 GHz	R&S®FS-Z110	1089.0947.05

## Power sensors supported <sup>22</sup>

Designation	Type	Order No.
Universal Power Sensor, 10 MHz to 8 GHz, 100 mW, 2-path	R&S <sup>®</sup> NRP-Z211	1417.0409.02
Universal Power Sensor, 10 MHz to 8 GHz, 200 mW	R&S <sup>®</sup> NRP-Z11	1138.3004.02
Universal Power Sensor, 10 MHz to 18 GHz, 100 mW, 2-path	R&S <sup>®</sup> NRP-Z221	1417.0309.02
Universal Power Sensor, 10 MHz to 18 GHz, 200 mW	R&S <sup>®</sup> NRP-Z21	1137.6000.02
Universal Power Sensor, 10 MHz to 18 GHz, 2 W	R&S <sup>®</sup> NRP-Z22	1137.7506.02
Universal Power Sensor, 10 MHz to 18 GHz, 15 W	R&S <sup>®</sup> NRP-Z23	1137.8002.02
Universal Power Sensor, 10 MHz to 18 GHz, 30 W	R&S <sup>®</sup> NRP-Z24	1137.8502.02
Power Sensor Module with Power Splitter, DC to 18 GHz, 500 mW	R&S <sup>®</sup> NRP-Z27	1169.4102.02
Power Sensor Module with Power Splitter, DC to 26.5 GHz, 500 mW	R&S <sup>®</sup> NRP-Z37	1169.3206.02
Thermal Power Sensor, 0 Hz to 18 GHz, 100 mW	R&S <sup>®</sup> NRP-Z51	1138.0005.02
Thermal Power Sensor, 0 Hz to 40 GHz, 100 mW	R&S <sup>®</sup> NRP-Z55	1138.2008.02
Thermal Power Sensor, 0 Hz to 50 GHz, 100 mW	R&S <sup>®</sup> NRP-Z56	1171.8201.02
Thermal Power Sensor, 0 Hz to 67 GHz, 100 mW	R&S <sup>®</sup> NRP-Z57	1171.8401.02
Wideband Power Sensor, 50 MHz to 18 GHz, 100 mW	R&S <sup>®</sup> NRP-Z81	1137.9009.02
Average Power Sensor, 9 kHz to 6 GHz, 200 mW	R&S <sup>®</sup> NRP-Z91	1168.8004.02
Average Power Sensor, 9 kHz to 6 GHz, 2 W	R&S <sup>®</sup> NRP-Z92	1171.7005.02

## Probes supported by option R&S<sup>®</sup>FSW-B71/-B71E

Designation	Type	Order No.
1.0 GHz, active, 1 M $\Omega$ , 0.8 pF	R&S <sup>®</sup> RT-ZS10E	1418.7007.02
1.0 GHz, active, 1 M $\Omega$ , 0.8 pF, micro button	R&S <sup>®</sup> RT-ZS10	1410.4080.02
1.5 GHz, active, 1 M $\Omega$ , 0.8 pF, micro button	R&S <sup>®</sup> RT-ZS20	1410.3502.02
3.0 GHz, active, 1 M $\Omega$ , 0.8 pF, micro button	R&S <sup>®</sup> RT-ZS30	1410.4309.02
6.0 GHz, active, 1 M $\Omega$ , 0.3 pF, micro button	R&S <sup>®</sup> RT-ZS60	1418.7307.02
1.5 GHz, active, differential, 1 M $\Omega$ , 0.6 pF, micro button	R&S <sup>®</sup> RT-ZD20	1410.4409.02
3.0 GHz, active, differential, 1 M $\Omega$ , 0.6 pF, micro button	R&S <sup>®</sup> RT-ZD30	1410.4609.02
4.5 GHz, active, differential, 1 M $\Omega$ , 0.4 pF, micro button	R&S <sup>®</sup> RT-ZD40	1410.5205.02

The Bluetooth<sup>®</sup> word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Rohde & Schwarz is under license.

CDMA2000<sup>®</sup> is a registered trademark of the Telecommunications Industry Association (TIA-USA).

“WiMAX Forum” is a registered trademark of the WiMAX Forum. “WiMAX”, the WiMAX Forum logo, “WiMAX Forum Certified”, and the WiMAX Forum Certified logo are trademarks of the WiMAX Forum.

For product brochure, see PD 5214.5984.12 and [www.rohde-schwarz.com](http://www.rohde-schwarz.com)

<sup>22</sup> For average power measurement only.



## Service you can rely on

- | Worldwide
- | Local and personalized
- | Customized and flexible
- | Uncompromising quality
- | Long-term dependability

## About Rohde & Schwarz

Rohde & Schwarz is an independent group of companies specializing in electronics. It is a leading supplier of solutions in the fields of test and measurement, broadcasting, radiomonitoring and radiolocation, as well as secure communications. Established more than 75 years ago, Rohde & Schwarz has a global presence and a dedicated service network in over 70 countries. Company headquarters are in Munich, Germany.

## Environmental commitment

- | Energy-efficient products
- | Continuous improvement in environmental sustainability
- | ISO 14001-certified environmental management system

Certified Quality System  
**ISO 9001**

## Rohde & Schwarz GmbH & Co. KG

[www.rohde-schwarz.com](http://www.rohde-schwarz.com)

## Regional contact

- | Europe, Africa, Middle East | +49 89 4129 12345  
[customersupport@rohde-schwarz.com](mailto:customersupport@rohde-schwarz.com)
- | North America | 1 888 TEST RSA (1 888 837 87 72)  
[customer.support@rsa.rohde-schwarz.com](mailto:customer.support@rsa.rohde-schwarz.com)
- | Latin America | +1 410 910 79 88  
[customersupport.la@rohde-schwarz.com](mailto:customersupport.la@rohde-schwarz.com)
- | Asia/Pacific | +65 65 13 04 88  
[customersupport.asia@rohde-schwarz.com](mailto:customersupport.asia@rohde-schwarz.com)
- | China | +86 800 810 8228/+86 400 650 5896  
[customersupport.china@rohde-schwarz.com](mailto:customersupport.china@rohde-schwarz.com)

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG  
Trade names are trademarks of the owners | Printed in Germany (as)  
PD 5214.5984.22 | Version 05.01 | December 2012 | R&S®FSW

Subject to change

© 2011 - 2012 Rohde & Schwarz GmbH & Co. KG | 81671 München, Germany



5214598422