

SOLAR LINE IMPEDANCE STABILIZATION NETWORK


SOLAR TYPE 21601-50-TS-50-N

Specifications:

Current rating: 50 amperes
 Inductance: 50 μ H
 Frequency range (recommended): 9 kHz – 30 MHz
 Voltage (line to ground): 400 VDC, 270 V 50 – 60 Hz, 135 V 400 Hz
 Power connections: TS 1/4-20 threaded stud
 RF connector: Type N
 Coupling capacitor: 0.25 μ F
 Circuit: Single
 Case size: 10.29" x 9.25" x 20.00" (26.14 cm x 23.50 cm x 50.80 cm)
 Overall length with base plate: 23.75" (60.33 cm)

Remarks: Designed for CISPR 16-1-2 Ed. 1.2. Specifications subject to change without notice.

Rev. March 3, 2017

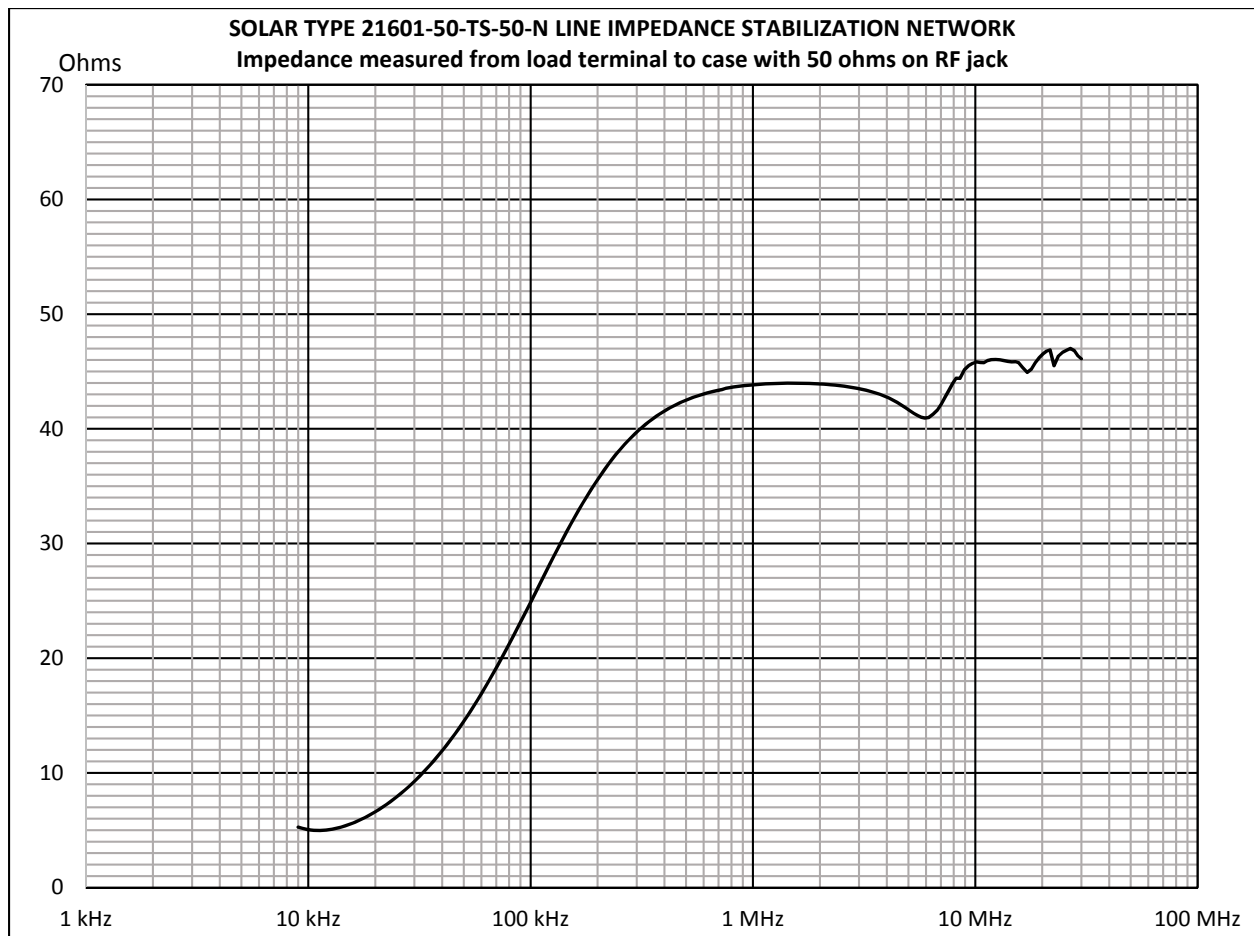

SOLAR ELECTRONICS COMPANY

A Division of A.T. Parker, Inc.