




NETWORK ANALYZERS

RF Network Analyzer, 500 kHz to 1.3 GHz
Model 8505A



- 100 dB of dynamic range
- Digital readout of data with analog display
- Direct group delay and deviation from linear phase
- High performance sweep oscillator
- Complete family of 50 Ω and 75 Ω test sets
- Digital storage and normalization

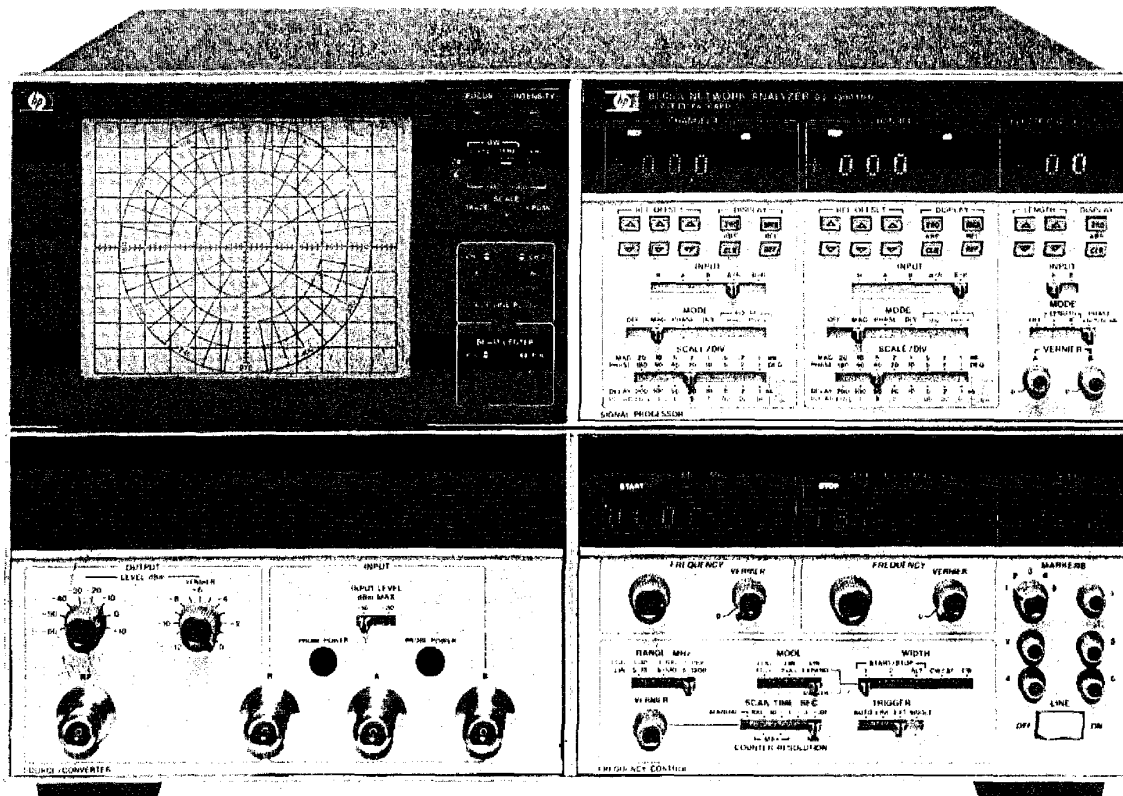

HP 8505A



The HP 8505A is a high performance RF network analyzer operating over the 500 kHz to 1.3 GHz frequency range. It accurately and easily measures complex impedance, transfer functions and group delay of coaxial components and semiconductors. Because both magnitude and phase are measured, it is possible to completely characterize the linear behavior of either active or passive networks.

Since magnitude and phase can be measured and displayed over 100 dB of dynamic range (-10 to -110 dBm), it is a simple process for the HP 8505A to measure transmission loss of high rejection devices such as filters or gain and return loss of small signal devices like amplifiers. Distortion parameters like group delay, deviation from linear phase, and deviation from constant amplitude are measured in an equally straightforward manner. Group delay is measured and displayed directly to resolutions of 1 ns per major division using a new linear FM measurement technique. A unique new electrical line stretcher compensates for the linear phase shift of the device under test so that phase non-linearities may be examined at high resolution (1° per major division). Amplitude deviations with frequency can be similarly observed to resolutions 0.1 dB per major division with clear, crisp trace stability. In addition, it is possible to read out swept amplitude, phase and delay digitally at any one of five continuously variable markers with resolutions of 0.01 dB, 0.1°, and 0.1 ns respectively.

Many of the HP 8505A's high performance features and operating conveniences are derived from the fact that it is a completely integrated system including both the sweep oscillator and receiver. The basic instrument also includes a built-in frequency counter, polar and rectangular displays on the same CRT, the new electronic line stretcher, group delay measurement, and frequency selective digital readings of swept amplitude, phase and delay. The frequency counter with resolutions up to 100 Hz adds further precision to the measurements by allowing frequency as well as amplitude, phase and delay to be read out at any of the five markers. The HP 8505A is fully programmable in a straightforward fashion using the Hewlett-Packard Interface Bus (HP-IB operation is standard). The user can configure a customized automatic system or for convenience HP offers a fully configured system, the HP 8507D. (See pages 624 and 625.)

Companion instruments include the HP 11850A Three Way Power Splitter for high resolution transmission comparison measurements, the HP 8502A Transmission/Reflection Bridge for simultaneous transmission and reflection measurements, and the HP 8503A S-parameter Test Set for complete characterization of two port devices in a single test set-up. The HP 8501A Storage-Normalizer adds digital storage, normalization, signal averaging, increased resolution, and graphics to HP 8505A measurements.



HP 8505A Specifications

Source

Frequency Characteristics

Frequency range: 500 kHz to 1.3 GHz in three ranges, 500 kHz to 13 MHz, 500 kHz to 130 MHz and 500 kHz to 1.3 GHz.

Swept frequency accuracy: $\pm 1\%$ of range for linear sweep.

CW frequency accuracy: ± 2 counts \pm time-base accuracy.

Frequency stability: better than $\pm 0.01\%$ of reading $\pm 0.01\%$ of frequency range over 10 minutes after warm-up.

Frequency counter characteristics: frequency counter measurements are made at any one of five continuously variable marker positions without interrupting the swept RF signal.

Resolution (least significant digit)

Frequency Range (MHz)	0.5 to 13	0.5 to 130	0.5 to 1300
10 ms Sweep time	10 kHz	100 kHz	1 MHz
100 ms Sweep time	1 kHz	10 kHz	100 kHz
>1 second Sweep time	100 Hz	1 kHz	10 kHz

Counter accuracy: ± 2 counts \pm time-base accuracy.

Marker frequency accuracy: $\pm 0.002\%$ of scan width \pm counter accuracy. Measured in CW $\pm \Delta F$.

Time-base accuracy: ± 5 ppm ± 1 ppm/ $^{\circ}$ C ± 3 ppm/90 days.

Output Characteristics

Output power range: +10 dBm to -72 dBm.

Attenuator accuracy: ± 1.5 dBm over 70 dB range.

Vernier accuracy: ± 1 dB.

Leveling: ± 0.5 dB from 500 kHz to 1.3 GHz.

Impedance: 50 Ω ; ≥ 16 dB return loss at -10 dBm output level (<1.38 SWR).

Residual FM

Frequency Range (MHz)	0.5 to 13	0.5 to 130	0.5 to 1300
Residual FM	50 Hz rms	200 Hz rms	2 kHz rms
Bandwidth	20 Hz-1 kHz	20 Hz-1 kHz	20 Hz-10 kHz

Harmonics: >25 dB below main signal at +10 dBm output level.

Sub-harmonics and spurious signals: below -50 dBm at +10 dBm output level.

General Characteristics

Sweep modes: linear Full, Log Full, Start/Stop 1, Start/Stop 2, Alternate, CW $\pm \Delta F$, and CW.

Sweep times: 10 ms to 100 s in decade ranges.

Trigger modes: auto, line sync., single scan or external sync.

RF Output connector: type N female.

Receiver

Frequency range: 500 kHz to 1.3 GHz.

Input Characteristics

Input channels: three channels (R, A, and B) with 100 dB dynamic range.

Damage level: +20 dBm or ≥ 50 V dc.

Noise (average, 10 kHz BW): -110 dBm from 10 to 1300 MHz; -100 dBm from 2 to 10 MHz; -95 dBm from 0.5 to 2 MHz.


Impedance: 50 Ω ; ≥ 20 dB return loss (<1.22 SWR). Typically >26 dB return loss (<1.11 SWR).

Magnitude Characteristics


Absolute frequency response (A, B, R): ± 1.5 dB.

Ratio frequency response (A/R, B/R): ± 0.3 dB from 0.5 MHz to 1.3 GHz.

Dynamic accuracy: ± 0.01 dB/dB from -20 to -40 dBm; ± 0.2 dB from -10 to -50 dBm; ± 0.5 dB from -50 to -70 dBm; ± 1.0 dB from -70 to -90 dBm; ± 2.0 dB from -90 to -100 dBm; ± 4.0 dB from -100 to -110 dBm.

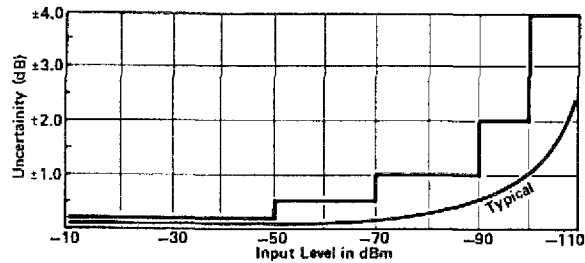

Crosstalk error limits: >100 dB isolation between inputs.

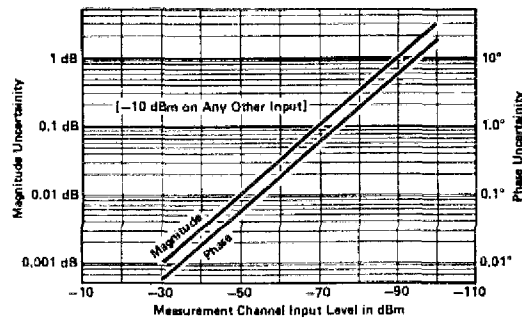

Reference offset range: ± 199.9 dB.

Reference offset accuracy: ± 0.03 dB ± 0.003 dB/dB of offset.

Marker measurement resolution: 0.01 dB over any <10 dB range; 0.1 dB over any ≥ 10 dB range.

CRT display resolution: 0.1 dB to 20 dB/division in 1, 2, 5 sequence.

Phase Characteristics

Frequency response: $\pm 3^{\circ}$ from 500 kHz to 750 MHz; $\pm 5^{\circ}$ from 750 MHz to 1.3 GHz.

Range: $\pm 180^{\circ}$.

Accuracy: $\pm 0.01^{\circ}$ /degree for $\pm 170^{\circ}$; $\pm 0.01^{\circ}$ /degree $\pm 0.5^{\circ}$ for $\pm 180^{\circ}$.

Dynamic accuracy (in 10 kHz Bandwidth): $\pm 0.02^{\circ}$ /dB from -20 to -40 dBm; $\pm 0.5^{\circ}$ from -10 to -50 dBm; $\pm 1^{\circ}$ from -50 to -70 dBm; $\pm 3^{\circ}$ from -70 to -90 dBm.

Crosstalk: see amplitude crosstalk specification.

Reference offset accuracy: $\pm 0.3^{\circ} \pm 0.5\%$ of offset.

Marker measurement resolution: $\pm 0.1^{\circ}$ over <100 $^{\circ}$ range and 1° for $\geq 100^{\circ}$ range.

CRT display resolution: 1° to 180° per division in 8 steps.

Polar characteristics: frequency Response, Dynamic Response, Reference Offset and Marker Measurement specifications are the same as magnitude and phase characteristics.

CRT display accuracy: actual value is within less than 3 mm circle of the displayed value.

Tracking between dB offset controls and polar full switch positions: ≤ 0.2 dB.

Full scale magnitude range: 1 to 0.01 in a 1, 0.5, 0.2 sequence.

Delay Characteristics

Frequency response: ± 1 ns from 1 MHz to 1.3 GHz.

Delay accuracy: $\pm 3\%$ of reading ± 3 units (Units = 1 ns for 0.5 to 1300 MHz range, 10 ns for 0.5 to 130 MHz range, and 100 ns for 0.5 to 13 MHz range.).

¹ ± 3 units may be calibrated out with thru connection.

NETWORK ANALYZERS

RF Network Analyzer, 500 kHz to 1.3 GHz (cont.)



Model 8505A

Range Resolution and Aperture

Frequency Range (MHz)	0.5 to 13	0.8 to 130	4.0 to 1300
Range	0 to 80 μ s	0 to 8 μ s	0 to 800 ns
Resolution CRT: Marker:	100 ns 100 ns	10 ns 10 ns	1 ns 1 ns
Marker with Delay scale/Div Switch set to:	10 ns ($<1 \mu$ s)	1 ns (<100 ns)	0.1 ns (<10 ns)
Aperture ¹	7 kHz	20 kHz	200 kHz

Reference offset range: ± 1999 dB.

Reference offset accuracy: ± 0.3 units $\pm 0.3\%$ of offset.

Electrical Length/Ref. Plane Extension Characteristics

Calibrated Electrical Length Range and Resolution²

Frequency Range (MHz)	0.5 to 13	0.5 to 130	0.5 to 1300
Range X1	± 19.9 m	± 1.99 m	± 19.9 cm
X10	± 100 m	± 10 m	± 1 m
Resolution X1	10 cm	1 cm	0.1 cm
X10	1 m	10 cm	1 cm

Calibrated electrical length accuracy: $\pm 3\%$ of reading $\pm 1\%$ of range.

Linear phase substitution (degrees/scan) range: $\pm 1700^\circ$ per scan with 0° offset.

$$\frac{\pm 1.4 \text{ km}}{\text{scan width (MHz)}} \quad \text{or} \quad \frac{\pm 4.7 \mu\text{s}}{\text{scan width (MHz)}}$$

Linear phase substitution resolution: 10°

Linear phase substitution accuracy: $\pm 3\%$ of reading $\pm 10^\circ$ / scan.

Phase compensation linearity: $<0.2\%$ of phase slope inserted.

General Characteristics

RF input connectors: type N female.

Display bandwidth: selectable IF bandwidths of 10 kHz and 1 kHz. A video filter position is also provided.

CRT overlays: Smith Charts (2, 1, 0.5, 0.2, 0.1 full scale), Log Charts (10 MHz, 100 MHz and 1000 MHz).

CRT photography: HP 197A Opt 006 camera or HP 197A with HP 10375A Bezel Adapter required to fit HP 8505A display. A CRT illumination control is provided.

Auxiliary Outputs

Channel 1 and 2 outputs: 0.25 V/display division.

Sweep output: 0.25 V/display division.

Pen lift: dc coupled, 200 mA current sink.

Programming

The HP 8505A has a remote programming interface using the Hewlett-Packard Interface Bus with Learn Mode. One 0.5 m (HP 10833D) HP-IB cable included.

Power: selection of 100, 120, 200 or 240 V $\pm 5\%$ -10%, 50 to 60 Hz, approximately 275 watts.

Size: 279 H x 426 W x 553 mm D (11 x 16.75 x 21.75 in.).

HP 8505A Opt 005 Specifications (phase-lock operation)

Source

Frequency Characteristics

Modes (HP 8505A): CW and CW $\pm \Delta F$ only.

Range and Resolution (HP 8505A and 8656B):

(Total frequency range is 500 kHz to 990 MHz)

	HP 8656B Frequency Ranges (MHz)	HP 8505A Frequency Range MHz		
		0.5 to 13	0.5 to 130	0.5 to 1300
CW Resolution (set on HP 8656)	All freq. ranges	10 Hz	10 Hz	10 Hz
$\pm \Delta F$ Resolution (set on HP 8505)	All freq. ranges	1 Hz	10 Hz	100 Hz
Max +/- ΔF	0.5-123.5 123.5-247 247-990	1.3kHz	13kHz 13 kHz	50kHz 99kHz

Range and Resolution (HP 8505A and 8642B):²

(Total frequency range 500 kHz to 1300 MHz)

	HP 8642B Frequency Ranges (MHz)	HP 8505A Frequency Range MHz		
		0.5 to 13	0.5 to 130	0.5 to 1300
CW Resolution (set on HP 8642)	All freq. ranges	1 Hz	1 Hz	1 Hz
$\pm \Delta F$ Resolution (set on HP 8505)	All freq. ranges	1 Hz	10 Hz	100 Hz
Max +/- ΔF ³	0.5-132 ¹ 132-1300	1.3 kHz	13 kHz	130 kHz 130 kHz

Typical system residual FM: the residual FM of a phase-locked HP 8505A approaches that of the HP 8642A/B or 8656B.

Output Characteristics

Power output, harmonics, spurious outputs, RF noise, etc. are determined by the HP 8642A/B or the HP 8656B.

Receiver

Magnitude and phase characteristics are unchanged with the exception of the dynamic range specification.

Delay Characteristics

Accuracy: $\pm 3\%$ of reading ± 3 units. Units: 1 μ s for 0.5-1300 MHz; 10 μ s for 0.5-130 MHz; 100 μ s for 0.5-13 MHz.

Range, resolution and aperture: (HP 8642A/B or 8656B) (HP 8505A indicated units x 1000)

	8505 Frequency Range (MHz)		
	0.5-13	0.5-130	0.5-1300
Range	0-80 ms	0-8 ms	0-800 μ s
Resolution: CRT & Digital Marker Digital Marker with Delay Switch Setting	100 μ s 10 μ s <1 ms	10 μ s 1 μ s $<100 \mu$ s	1 μ s 100 ns $<10 \mu$ s
Aperture ⁴	1.5 kHz	2.0 kHz	4.0 kHz

Electrical Length Characteristics

Accuracy: $\pm 3\%$ of reading $\pm 3\%$ of range.

Calibrated electrical length, range, and resolution⁵: (HP 8642A/B or 8656B): (HP 8505A digital readouts x 1000) give electrical length 1000 times larger and resolution divided by 1000.

General Characteristics

RF Inputs

L.O. drive input level: 10 dBm ± 2 dB (Rear panel BNC).

RF drive input level: 0 dBm ± 2 dB (Rear panel BNC).

Tunable FM output: ± 1.3 V maximum (rear panel BNC with output level controlled by $\pm \Delta F$ control on front panel of HP 8505A). ± 1.3 V output is obtained independent of the frequency range switch setting.

Capture range of phase-lock loop: 100 kHz (0.5-13 MHz range); 400 kHz (0.5-130 MHz range); 4 MHz (0.5-1300 MHz range).

Standard/phase-lock operation: rear panel switch can disable all phase-lock circuitry when using the instrument in its standard (non phase-lock) operating mode.

¹Heterodyne band.

²HP 8642A and the HP 8505A have a total frequency range of 500 kHz to 1057.5 MHz. Resolution and ΔF performance is the same as the HP 8642B.

³Max deviation for the HP 8642A/B exceeds 1 MHz for various frequency bands.


⁴Typical measurement Aperture using linear FM modulation technique.

⁵Vernier provides continuous adjustment of electrical length. Calibrated Electrical Length Linearity: $\Delta \theta = 0.7\% \times 1.2 f(\text{MHz}) \times 1$ (metres).


NETWORK ANALYZERS

RF Network Analyzer, 500 kHz to 1.3 GHz (cont.)


Models 8503A/B, 8502A/B, 11850A/B, 11851A-11858A, 11857B, 1121A

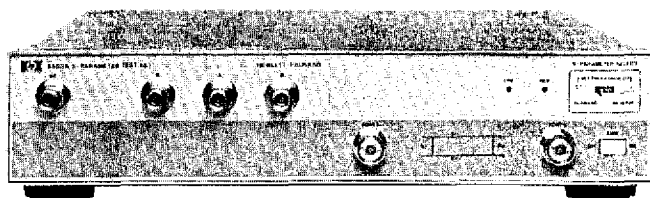


HP 8503A

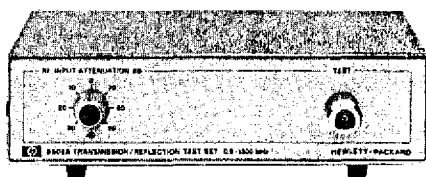

HP 8502A



HP 11850A



HP 11851A

HP 8502A 50 Ω Transmission/Reflection Test Set

HP 8502B 75 Ω Transmission/Reflection Test Set

Frequency range: 500 kHz to 1.3 GHz.

Impedance: HP 8502A, 50 Ω ; HP 8502B, 75 Ω .

Directivity: ≥ 40 dB.

Frequency Response

Transmission: $\leq \pm 0.8$ dB and $\leq \pm 8^\circ$.

Reflection: $\leq \pm 1.5$ dB and $\leq 15^\circ$ from 0.5–1300 MHz; $\leq \pm 10^\circ$ from 2–1300 MHz.

Port Match

Test port: ≥ 26 dB return loss from 2–1300 MHz (≥ 24 dB for HP 8502B); ≥ 20 dB return loss from 0.5–2 MHz (≥ 18 dB for HP 8502B).

Test port open/short ratio: ± 0.75 dB and $\pm 6^\circ$ from 2–1000 MHz (± 0.9 dB and $\pm 7.5^\circ$ for HP 8502B); ± 0.9 dB and $\pm 7.5^\circ$ from 1000–1300 MHz; ± 1.25 dB and $\pm 10^\circ$ from 0.5–2 MHz.

Reference and reflection ports: ≥ 25 dB return loss from 2–1000 MHz; ≥ 23 dB return loss from 0.5–1300 MHz.

Input port: ≥ 23 dB return loss.

Nominal Insertion Loss

Input to test port: 13 dB (HP 8502A), 19 dB (HP 8502B).

Input to reference port: 19 dB (HP 8502A), 19 dB (HP 8502B).

Input to reflection port: 19 dB (HP 8502A), 31 dB (HP 8502B).

Maximum operating level: +20 dBm.

Damage level: 1 watt CW.

RF attenuator range: 0 to 70 dB in 10-dB steps.

Connectors test port: 50 Ω Type N Female for HP 8502A and 75 Ω Type N Female for HP 8502B; all other RF ports 50 Ω Type N Female; Bias input, BNC Female.

DC bias input: ± 30 V dc and ± 200 mA.

Includes: HP 8502B includes 50 Ω /75 Ω minimum loss pad.

Recommended accessory: HP 11851A RF Cable Kit for either HP 8502A or 8502B.

Size: 61.5 H x 101 W x 204 mm D (2.44" x 7.5" x 8.0").

Weight: net, 1.7 kg (3.25 lb); shipping, 3.1 kg (7 lb).

HP 8503A 50 Ω S-Parameter Test Set

HP 8503B 75 Ω S-Parameter Test Set

Frequency range: 500 kHz to 1.3 GHz.

Impedance: HP 8503A, 50 Ω ; HP 8503B, 75 Ω .

Directivity: ≥ 40 dB.

Frequency Response

Transmission (S_{12} , S_{21}): ± 1 dB, $\pm 12^\circ$ from 0.5–1300 MHz.

Reflection (S_{11} , S_{22}): ± 2 dB, $\pm 20^\circ$ from 0.5–1300 MHz; $\pm 15^\circ$ from 2–1300 MHz.

Port Match

Test ports 1 and 2: ≥ 26 dB return loss from 2–1300 MHz (≥ 24 dB for HP 8503B), ≥ 20 dB return loss from 0.5–2 MHz (≥ 18 dB for HP 8503B).

Test port 1 and 2 open/short ratio: $\leq \pm 0.75$ dB and $\pm 6^\circ$ from 2–1000 MHz (± 0.9 dB and $\pm 7.5^\circ$ for HP 8503B); $\leq \pm 0.9$ dB and 7.5° from 1000–1300 MHz; ± 1.25 dB and $\pm 10^\circ$ from 0.5–2 MHz.

Reference and return ports: ≥ 23 dB return loss from 2–1000 MHz; ≥ 20 dB return loss from 0.5–2 MHz and 1000–1300 MHz.

RF input port: 20 dB return loss from 0.5–1300 MHz.

Maximum operating level: +20 dBm.

Damage level: 1 watt CW.

Connectors: test ports, 50 Ω APC-7 for HP 8503A and 75 Ω Type-N Female for HP 8503B; all other RF connectors, 50 Ω Type-N Female; Bias inputs BNC Female.

DC bias input: 30 V dc, ± 200 mA.

Includes: four 19 cm (7.5") cables for connection to HP 8505A.

Recommended accessory: HP 11857A 50 Ω Test Port Extension Cables or HP 11857B/C 75 Ω Test Port Extension Cables.

Programming: programming via HP-IB; 0.5 m HP-IB cable included.

Power: 100, 120, 220, or 240 V $\pm 5\%$ –10%, 50 or 60 Hz; approx. 10 watts (15 watts for HP 8503B).

Size: 90 H x 426 W x 553 mm D (3.5" x 16.75" x 21.0").

Weight: net, 9.1 kg (20 lb); shipping, 11.3 kg (25 lb).

Accessories

HP 11850A 50 Ω Power Splitter

HP 11850B 75 Ω Power Splitter

Frequency range: dc to 1.3 GHz.

Impedance: HP 11850A, 50 Ω ; HP 11850B, 75 Ω .

Tracking between any two output ports: ≤ 0.1 dB and $\leq 1.5^\circ$.

Equivalent source match (ratio or leveling): ≥ 32 dB return loss (≤ 1.05 SWR).

Input port match: ≥ 20 dB return loss.

Nominal insertion loss: 9.54 dB for HP 11850A; 7.78 dB for HP 11850B.

Frequency response absolute: input to output ≤ 0.2 dB.

Maximum operating level: +20 dBm.

Burn-out level: ≥ 1 watt CW.

Connectors: HP 11850A, 50 Ω Type N female; HP 11850B, three outputs 75 Ω Type N female; RF input, 50 Ω Type N female.

Recommended accessory: HP 11851A RF Cable Kit.

Includes: HP 11850B includes three 50 Ω /75 Ω Minimum Loss Pads

Size: 46 H x 67 W x 67 mm D (1.88" x 2.63" x 2.63").

Weight: net, 1.8 kg (4 lb); shipping, 3.1 kg (7 lb).



HP 11851A RF Cable Kit

General: three 610 mm (24 in.) 50 Ω cables phase matched to 4° at 1.3 GHz and one cable 860 mm (34 in.). Connectors are Type N Male. Recommended for use with HP 8502A/B Transmission/Reflection Test Set and HP 11850A/B Power Splitter.

Weight: net, 0.91 kg (2 lb); shipping, 1.36 kg (3 lb).

HP 11852A 50 Ω/75 Ω Minimum Loss Pad

General: the HP 11852A is a low SWR minimum loss pad required for transmission measurements on 75 Ω devices with HP 8505A receiver (50 Ω).

Frequency range: dc to 1.3 GHz.

Insertion loss: 5.7 dB.

Return loss: 75 Ω side, 50 Ω side terminated: typically ≥34 dB (≤1.04 SWR). 50 Ω side, 75 Ω side terminated: typically ≥30 dB (≤1.06 SWR).

Typical flatness: ≤0.1 dB from dc to 1.3 GHz.

Maximum input power: 250 mW (+24 dBm).

Connectors: 50 Ω Type N female and 75 Ω Type N male.

Size: 14 D x 70 mm L (0.56" x 2.75").

Weight: net, 0.11 kg (4 oz); shipping, 0.26 kg (9 oz).

HP 11853A 50 Ω Type N Accessory Kit

General: the HP 11853A furnishes the RF components required for measurement of devices with 50Ω Type N Connectors using the HP 11850A, 8502A, or 8503A (8503A also requires the HP 85032A). Kit contains a Type N Female short, a Type N Male short, two Type N Male barrels, two Type N Female barrels and storage case.

Weight: net, 0.91 kg (2 lb); shipping, 1.36 kg (3 lb).

HP 11854A 50 Ω BNC Accessory Kit

General: the HP 11854A furnishes the RF components required for measurement of devices with 50Ω BNC Connectors using the HP 11850A, 8502A, or 8503A (8503A also requires the HP 85032A). Kit contains two Type N Male to BNC Female adapters, two Type N Male to BNC Male adapters, two Type N Female to BNC Female adapters, two Type N Female to BNC Male adapters, a BNC Male short and storage case.

Weight: net, 1.13 kg (2½ lb).

HP 11855A 75 Ω Type N Accessory Kit

General: the HP 11855A provides the RF connecting hardware generally required for measurement of devices with 75 Ω Type N connectors using the HP 8502B, 8503B or 11850B. Kit contains two Type N Male barrels, two Type N Female barrels, a 75 Ω Type N Female short, a 75 Ω Type N Male short, a 75 Ω Type N Male termination, and storage case.

Weight: net, 0.91 kg (2 lb); shipping, 1.36 kg (3 lb).

HP 11856A 75 Ω BNC Accessory Kit

General: the HP 11856A provides the RF connecting hardware generally required for measurement of devices with 75 Ω BNC connectors using the HP 8502B, 11850B, or 8503B. Kit contains two Type N Male to BNC Female adapters, two Type N Male to BNC Male adapters, two Type N Female to BNC Female adapters, two Type N Female to BNC Male adapters, a BNC Male short, a 75 Ω BNC Male termination, and storage case.

Weight: net, 0.91 kg (2 lb); shipping, 1.36 kg (3 lb).

HP 11857A 50 Ω APC-7 Test Port Extension Cables

General: two precision 61 cm (24 in.) cables, phase matched to 2° at 1.3 GHz for use with HP 8503A S-parameter test set. Connectors are 50 Ω APC-7.

Weight: net, 0.91 kg (2 lb); shipping, 2.3 kg (5 lb).

HP 11857B 75 Ω Type N Test Port Extension Cables

General: two precision 61 cm (24 in.) cables, phase matched to 2° at 1.3 GHz for use with HP 8503B S-parameter test set. One cable has 75 Ω Type N Male connectors on both ends; the other has one Type N Male and one Type N Female connector.

Weight: net, 0.91 kg (2 lb); shipping, 2.3 kg (5 lb).

HP 11858A Transistor Fixture Adapter

General: the HP 11858A adapts the HP 11600B and 11602B transistor fixtures (vertical test port configuration) to the HP 8503A S-parameter test set. Connectors are APC-7.

Weight: net, 0.91 kg (2 lb); shipping, 1.36 kg (3 lb).

Ordering Information

	Price
HP 8505A* RF Network Analyzer	\$40,370
Opt 005: Phase Lock	\$1,505
Opt 908: Rack Mounting Kit (for use without front handles)	\$50
Opt 910: Extra Manual	\$150
Opt 913: Rack Mounting Kit	\$62
HP 8503A* 50 Ω S-Parameter Test Set	\$7,170
Opt 908: Rack Mounting Kit (for use without front handles)	\$30
Opt 910: Extra Manuals	\$12
Opt 913: Rack Mounting Kit	\$30
HP 8503B* 75 Ω S-Parameter Test Set	\$7,270
Opt 908: Rack Mounting Kit (for use without front handles)	\$30
Opt 910: Extra Manual	\$12
Opt 913: Rack Mounting Kit	\$30
HP 8501A* Storage Normalizer	\$7,770
Opt 908: Rack Mounting Kit (for use without front handles)	\$30
Opt 910: Extra Manual	\$25
Opt 913: Rack Mounting Kit	\$30
HP 8502A 50 Ω Transmission/Reflection Test Set	\$3,010
Opt 910: Extra Manual	\$6
HP 8502B 75 Ω Transmission/Reflection Test Set	\$3,410
Opt 910: Extra Manual	\$6
HP 11850A 50 Ω Power Splitter	\$805
HP 11850B 75 Ω Power Splitter	\$1,405
HP 11851A RF Cable Kit	\$955
HP 11852A 50 Ω to 75 Ω Minimum Loss Pad	\$205
HP 11853A 50 Ω Type N Accessory Kit	\$230
HP 11854A 50 Ω BNC Accessory Kit	\$195
HP 11855A 75 Ω Type N Accessory Kit	\$230
HP 11856A 75 Ω BNC Accessory Kit	\$330
HP 11857A 50 Ω APC-7 Test Port Extension Cables	\$1,005
HP 11857B 75 Ω Type N Test Port Extension Cables	\$1,455
HP 11858A Transistor Fixture Adapter	\$980
HP 11864A Labeling Interface Kit	\$945

*Front Handles are standard