




306

COMPONENT MEASUREMENT

RF Impedance Analyzer HP 4191A

- 1-1000 MHz variable test frequency with sweep capability
- Direct reading of $|Z| - \theta, |Y| - \theta, |\Gamma| - \theta;$
 $L \cdot C - R \cdot G \cdot D \cdot Q$
 $R - X, G - B, \Gamma_x - \Gamma_y$

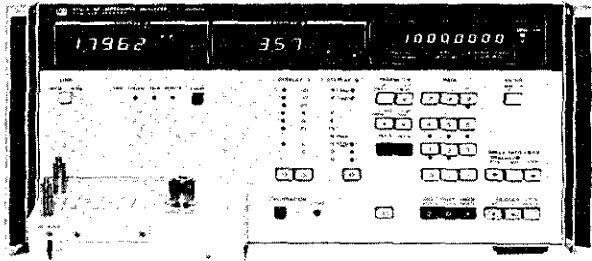

HP 4191A (Shown with Opt 907 Handles)



Description

The HP 4191A RF Impedance Analyzer measures 14 parameters with a maximum resolution of 4½ digits. The internal synthesizer provides variable frequencies from 1 MHz through 1000 MHz covering the UHF, VHF and video bands with automatic sweep capability. An internal dc bias supply with auto sweep function covers the voltage range of ± 40 V in 10 mV steps.

The HP 4191A permits reliable measurements over a wide measuring range. Its outstanding repeatability, frequency response and accuracy are made possible by unique error correction capability and specially designed test fixtures. These features allow the HP 4191A to be used in evaluation of electronic materials, components and circuitry.

The internal synthesizer provides a maximum resolution of 100 Hz (Opt 002) with an accuracy of 3 ppm, allowing small changes in the resonant frequency of the device under test to be easily detected. The swept frequency capability aids in the analysis of frequency characteristics of the device.

Two complete front panel settings (parameter selection and the sweep control) can be stored in a non-volatile memory and recalled at any time with a single key operation. This, together with the standard HP-IB interface, makes the HP 4191A extremely efficient either as a stand-alone or systems instrument.

These unique features permit very wide applications in: (1) semiconductor testing such as surface state evaluation at high frequencies (C-V/G-V and conductance (G/ ω - ω) characteristics), and the input/output impedance evaluation of diodes and transistors, (2) resonator, filter, and magnetic and dielectric materials testing, (3) evaluation of LCR components such as high frequency chip and leaded components, and (4) testing of communications related components such as cables, connectors, etc.

Specifications (Refer to data sheet for complete specifications)

Parameter measured: $|Z| - \theta, |Y| - \theta, |\Gamma| - \theta, R - X, G - B, \Gamma_x - \Gamma_y$
 $L - R \cdot G \cdot D \cdot Q, C - R \cdot G \cdot D \cdot Q$

Display: 4½ digit, max display 19999 counts

Deviation Measurement (deviation from stored reference)

$\Delta:$ -19999 to +19999 counts $\Delta\%:$ -1999.9 to +19999.9%

Measuring Signal ($23 \pm 5^\circ\text{C}$)

Frequency range: 1 MHz to 1000 MHz

Frequency step:

Standard: 100 kHz, 1-500 MHz 200 kHz, 500-1000 MHz

Opt 002: 100 Hz, 1-500 MHz 200 Hz, 500-1000 MHz

Frequency accuracy: ± 3 ppm

Signal level (into 50 Ω): -20 ± 3 dBm

Frequency control: spot and swept

- High resolution—4½ digit max
- Wide measuring range—1 m — 100 k ($|Z|$)
- Versatile, easy-to-use test fixtures

Measuring Mode

Spot measurement: at specific frequency (or dc bias)

Swept measurement: manual or automatic sweep from start to stop frequency (or dc bias) at step frequency (or dc bias) rate in linear or logarithmic form.

Auto Calibration

Automatic error compensation referenced to connected terminations (0 Ω , 50 Ω , 0 S), 51 frequencies including start and stop frequencies.

Electrical length compensation: automatic compensation for electrical length of test fixtures. (Range: 0 to 99.99 cm).

Internal dc Bias: Voltage range: -40 to $+40$ V, 10 mV step

Setting accuracy: 0.1% of setting $+10$ mV

Bias control: spot and swept

External dc Bias: Voltage range: -40 to $+40$ V

Max allowable current: 100 mA

Key status memory: 2 sets of measuring conditions can be stored and recalled at any time. These conditions are kept in storage even when LINE is turned off.

Ranging: Auto/Range hold **Trigger:** Internal, External or Manual

Self-test: automatic internal program test

HP-IB data output and remote control: standard

$|\Gamma| - \theta/\Gamma_x - \Gamma_y$ Measurement

Measuring Range: $|\Gamma|, \Gamma_x, \Gamma_y:$ 0.0001 to 1.0000

$\theta:$ 0° to $\pm 180.00^\circ$ (0 to $\pm \pi$ rad.)

$|\Gamma|, \Gamma_x, \Gamma_y$ resolution: 0.0001


Reference Data (Not Specified)

Temperature coefficient for $|\Gamma|:$ 0.0001/ $^\circ\text{C}$ ($23 \pm 5^\circ\text{C}$)

Measuring time: < 800 ms or < 250 ms (high speed mode)

Frequency switching time: ≤ 200 ms

$|\Gamma|, \Gamma_x, \Gamma_y$, ACCURACY

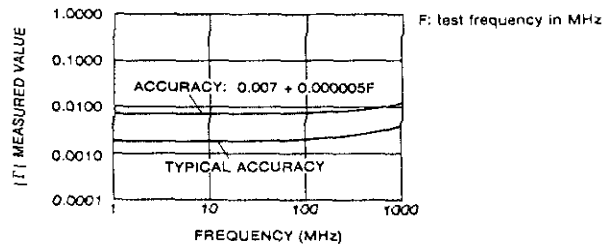

General

Temperature: 0 - 55 $^\circ\text{C}$, $< 95\%$ RH

Power: 100, 120, 220 V $\pm 10\%$, 240 V $+ 5\% - 10\%$, 48 - 66 Hz, 150 VA max.

Size: 425.5 mm W x 230 H x 574 mm D (16.75" x 9" x 22.6").

Weight: approx. 24 kg (52.8 lb)

Accessories furnished: accessory case (with reference terminations included).

Accessories Available

Accessory	Price
HP 16091A Coaxial Test Fixture	\$570
HP 16092A Spring Clip Test Fixture	\$550
HP 16093A Binding Post Test Fixture	\$224
HP 16093B Binding Post Test Fixture	\$238
HP 16094A Probe Fixture	\$208

Refer to page 301.

Ordering Information

HP 4191A RF Impedance Analyser	\$19,950
Opt W30 Extended repair service. See page 723.	+\$465
002: 100 Hz/200 Hz resolution synthesizer	+\$2,140
004: Recorder Outputs	+\$560