



Advanced Test Equipment Rentals
www.atecorp.com 800-404-ATEC (2832)

APS 1000 Series

There's a better solution... at a better price.



Key Features & Specifications for the APS 1000 Series

- **Output Power:** 2 kVA to 40 kVA
- **Output Frequency:** 45-500 Hz
- **Output Voltage:** Dual range, 0/150 V or 0/300 V, 1 phase
- **Isolated Output, THD:** < 1%
- **Input Requirements:** 220, 240, 380, 415, 480 VAC
± 10%, 3 phase, 47-63 Hz (2kVA, 3kVA
and 5kVA, 230VAC ± 15%, 1 phase)
- **Intuitive Front Panel Controls:** Frequency and Voltage
- **Easy to Read LED Displays:** Frequency, Voltage, Current,
Power and Power Factor
- **Memory Locations:** Can save three desired settings
of any voltage, frequency and current limit covered in
the output parameters

**The APS 1000 Series frequency
and voltage converters are
economically priced and offer
top of the line performance.**

The series consists of seven 1 phase output instruments ranging in size from 2 kVA to 40 kVA. The converters allow the user to duplicate a utility grid of either 50 or 60 hertz for export product testing or operation of imported equipment. The frequency can be adjusted to 400 hertz for applications such as the testing of military/avionics equipment or for the operation of 400 hertz electronics that are onboard an aircraft or a military vessel.

The adjustable frequency band of 45 to 500 Hertz in conjunction with the dual voltage ranges of 0-150 volts or 0-300 volts provides full capabilities for testing and operating electronics worldwide.

Setup and operation of the **APS 1000 Series** is exceptionally easy. The simple front panel layout allows users to continuously vary voltage and frequency or to select preset standard frequency settings. Individual meter displays provide digital readouts for frequency, voltage and current while a digital multimeter displays power or power factor.


The **APS 1000 Series** converters are a simple and cost effective solution for all of your AC power conversion needs!

Worldwide
Supplier
of Power
Conversion
Equipment



Toll Free 1-866-517-8400 www.adaptivepower.com

APS 1000 Series

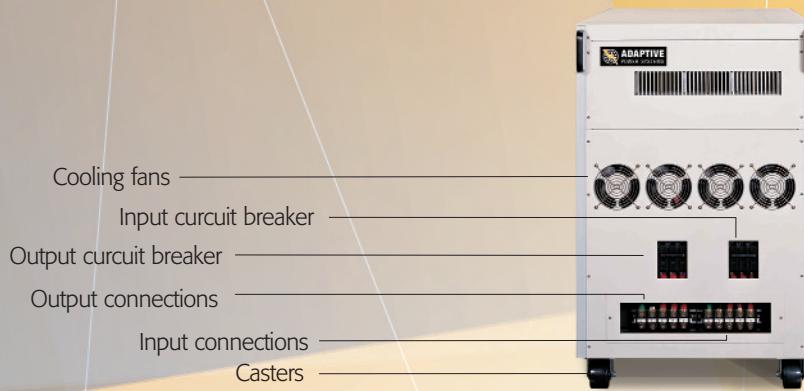

Instrument Specifications

| MODEL | 1002 | 1003 | 1005 | 1010 | 1020 | 1030 | 1040 |
|----------------------------------|---|--------------------------------------|----------|----------|----------|------------------------------|----------|
| INPUT SPECIFICATIONS | | | | | | | |
| Phase | 1Ø/2W + ground | | | | | 3Ø/3W + ground | |
| Voltage | 230V±15% | | | | | 220, 240, 380, 415, 480V±10% | |
| Frequency | 47-63Hz | | | | | | |
| OUTPUT SPECIFICATIONS | | | | | | | |
| Power rating | 2kVA | 3kVA | 5kVA | 10kVA | 20kVA | 30kVA | 40kVA |
| Max Arms @ 0-150 V | 16.8 A | 25.2 A | 42 A | 84 A | 168 A | 252 A | 336 A |
| Max Arms @ 0-300 V | 8.4 A | 12.6 A | 21 A | 42 A | 84 A | 126 A | 168 A |
| Phase | 1Ø/3W (L, N, G) | | | | | | |
| Voltage | Low Range | 0-150V | | | | | |
| | Hlgh Range | 0-300V | | | | | |
| | Resolution | 0.1V | | | | | |
| | Accuracy | ±(1%+0.2V) | | | | | |
| Frequency | Range | 45-500Hz | | | | | |
| | Resolution | 0.1Hz at 45-99.9Hz, 1Hz at 100-500Hz | | | | | |
| | Accuracy | ±0.2% | | | | | |
| Harmonic Distortion | ≤1%(Resistance Load) | | | | | | |
| Crest Factor | ≥3 to 1 | | | | | | |
| Load Regulation | ±0.5% | | | | | | |
| Protection | Over Current, Short Circuit, Over Temperature | | | | | | |
| Efficiency | ≥85% (at full load) | | | | | | |
| Operating Temperature | 32°-104°F, (0°-40°C), 80% Relative Humidity | | | | | | |
| Altitude | below 6500 feet | | | | | | |
| DISPLAYS AND CONTROLS | | | | | | | |
| 4 Digital LED meters | Frequency, Voltage, Current, Power or Power Factor (simultaneously) | | | | | | |
| PLC Remote Interface | M1, M2, M3, and Output On/Off | | | | | | |
| Memory | 3 Programmable Memory Locations for Voltage, Frequency and Current | | | | | | |
| Calibration | Front Panel Calibration | | | | | | |
| Auto voltage adjust | Enable for improved voltage regulation within ±0.1V | | | | | | |
| MECHANICAL SPECIFICATIONS | | | | | | | |
| | 2kVA | 3kVA | 5kVA | 10kVA | 20kVA | 30kVA | 40kVA |
| Dimensions (HxDxW) Inches | 12x26x17 | 12x26x17 | 12x26x17 | 28x26x17 | 34x26x17 | 38x36x24 | 43x36x24 |
| Weights (Kg/lbs) | 60/132 | 65/143 | 80/175 | 200/440 | 315/695 | 465/1025 | 550/1210 |



801 Hailey Street Ardmore, OK 73401
 Direct: 949-752-8400 • Fax: 949-756-0838
 Toll Free: 1-866-517-8400
www.adaptivepower.com