




Advanced Test Equipment Rentals

www.atecorp.com 800-404-ATEC (2832)

DATE	SYM	REVISION	RECORD	AUTH	DR	CR

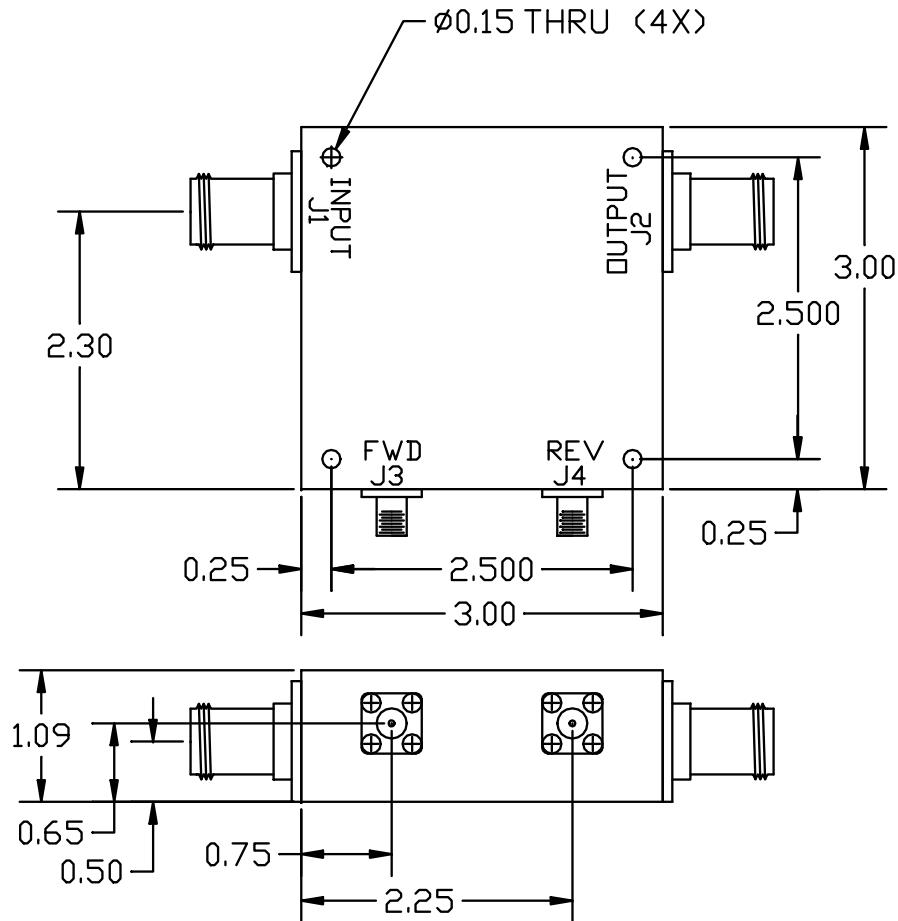

NOTES:

- 1) MATERIAL: ALUM.
- 2) FINISH CHEM FILM (YELLOW IRIDITE)

Model C5070

50 dB Dual Directional Coupler

Frequency: 800-2800 MHz
 Power: 1500 W CW
 Insertion Loss: 0.2 dB Max.
 VSWR(ML): 1.30:1 Max.
 Flatness: 50 dB \pm 0.75 dB Max.
 Directivity: 20 dB Min.



WERLATONE | SINCE 1965

Standard connector configurations for the Model C5070 are as follows.

Model	Input(J1)	Output(J2)	Fwd(J3)	Rev(J4)
C5070-10	N Female	N Female	N Female	N Female
C5070-12	N Female	N Female	SMA	SMA
C5070-13	N Female	N Female	BNC	BNC

TOLERANCE				WERLATONE INC.			
XX +/- .015	USED ON:	SCALE	DRAWN BY: CS				
XXX +/- .005			APPVD BY: MJ				
TITLE OUTLINE							
				DATE	DRAWING NUMBER		
				7/31/00	10379-501		