

R8000B Communications System Analyzer

The next generation of the world's only portable, full-featured communications analyzer



General Dynamics is pleased to announce the second generation of its revolutionary R8000 communications system analyzer. The R8000B delivers a previously unimaginable result: a truly portable instrument with more functions than yesterday's bench top analyzers. *And it now offers significantly improved spectral purity*, surpassing that of comparably priced and even much more expensive radio test sets.

The R8000's 14 pound weight gives technicians power and flexibility never before attainable - or currently attainable with any other instrument. This, combined with the unit's feature-packed spectrum analyzer and bright 8.4" color LCD, makes it ideal for taking to sites for infrastructure maintenance and interference measurement.

Firmware upgrades are available free via web download for the life of the unit, and new capabilities are being constantly added - so your R8000B actually becomes more powerful over time! Software and protocol options can also be added directly from the front panel in less than 30 seconds; so it is clear that the R8000B is the most flexible, robust future-proofed radio test set the industry has ever seen. The R8000B will change the way you perform radio service forever.

GENERAL DYNAMICS
SATCOM Technologies

R8000B Communications System Analyzer

The Ultimate Radio Test Set

A Compact and Lightweight Solution

You no longer need to lug multiple pieces of heavy equipment to perform service at remote locations. The R8000 has everything you need in one compact, 14 lb. package! Among the instruments included in the R8000 are:

- Spectrum Analyzer
- Signal Generator
- Sensitive Measurement Receiver
- Tracking Generator (optional)
- SINAD Meter
- Distortion Meter
- Modulation Scope
- Oscilloscope
- Frequency Error Meter
- Cable Fault Locator (optional)
- FM Deviation Meter
- AM Modulation Meter
- Receive Signal Strength Meter
- Broadband and Narrowband Power Meters
- Audio Counter
- Audio Generator
- AC / DC Voltmeters
- Return Loss/VSWR bridge (optional)
- DMR (MOTOTRBO™) test mode (optional)
- NXDN test mode (optional)
- TETRA subscriber test mode (optional)
- P25 conventional test mode (optional)
- P25 trunking test mode (optional)



Weight: 14 lbs.
Frequency Range: 250 kHz to 3 GHz
(1 GHz standard, 3 GHz optional)
Size: 9.4" high x 12.7" wide x 7.5" deep
Display: 8.4" LCD, visible in sunlight,
with wide viewing angle
Spec. An. Noise Floor: -120 dBm (-140 dBm at narrow spans)
RF Input: 50 W 5 Min, 150 W maximum


Superior Spectrum Analyzer

The R8000 comes equipped with a spectrum analyzer comparable to those found on stand-alone instruments costing as much or more. With a noise floor well below -140 dBm at narrow spans, super-fast signal acquisition, 4 markers (2 standard), and an available variable vertical scale down to 1 dB per division, the R8000 is the ideal tool for tracking and measuring elusive interfering signals.

Upgradable and Expandable

The software-based architecture of the R8000 lets you add software options and upgrades in the field. So if your needs change down the line, simply order the feature or protocol you need and enable it by entering a 16 digit option key using the front panel keypad.

Firmware upgrades are available on our website free of charge for the life of the unit.

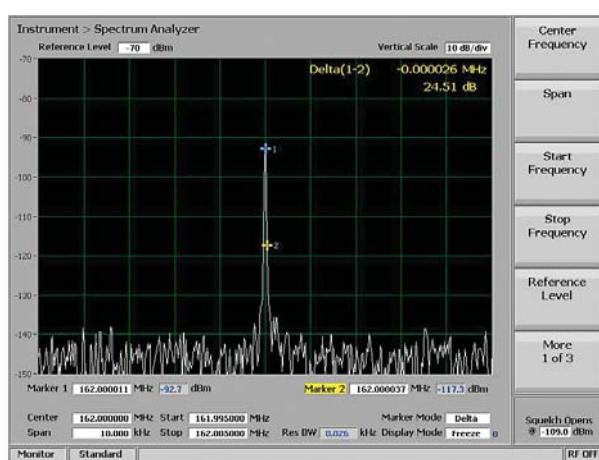

The R8000B: Production Grade Performance, Laboratory Grade Specifications, Field Portability

Monitor & Control Interface (M&C), Low Phase Noise Performance & 8920B Emulation for Manufacturing Environment




The M&C consists of proprietary commands as well as support of IEEE standard equipment ID query for automating manufacturing test processes and procedures. This, along with the exceptional phase noise performance of the R8000B's signal generator significantly improves manufacturing efficiency by reducing capital costs for the manufacturing applications. Additionally, the R8000B's 8920 emulation package provides a drop-in replacement for obsolete HP 8920B service monitors. *The outstanding purity of the R8000 signal generator can be seen in the spectrum analyzer capture on the right.*

"Dual Display" lets you see carrier signal and demodulated audio simultaneously

Our unique Dual Display allows you to view the RF spectrum analyzer and modulation scope at the same time, giving you the ability to analyze RF characteristics of the carrier signal and recovered audio from the same screen. Complete functionality of each instrument is available in Dual Display mode, and all associated measurements are displayed. With Dual Display, you no longer need to go back and forth from the spectrum analyzer to the modulation scope to see everything you need – it's all on one screen! Included with the Enhanced Spectrum Analyzer option R8-ESA.

Tracking Generator option

Our Tracking Generator option provides an integrated instrument that sets up the RF Generator in a sweeping mode that is lock stepped with the Spectrum Analyzer. This delivers a valuable capability for measuring and servicing a wide variety of RF filtering and combining networks such as IF filters, Duplexers, etc. A low Spectrum Analyzer noise floor, FFT processing, and a broad selection of customizable display and marker functions assure quick and accurate measurements. Additionally, antenna return loss and VSWR measurements are now possible with the use of the optional Return Loss Bridge (R8-VSWR).

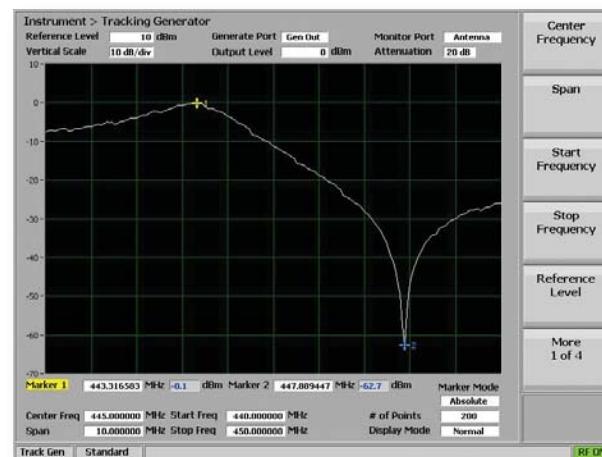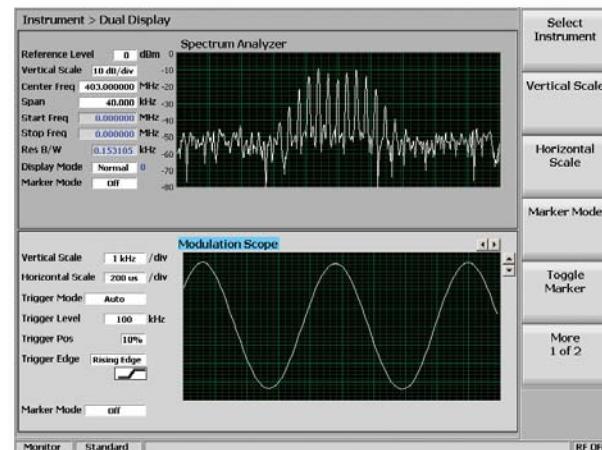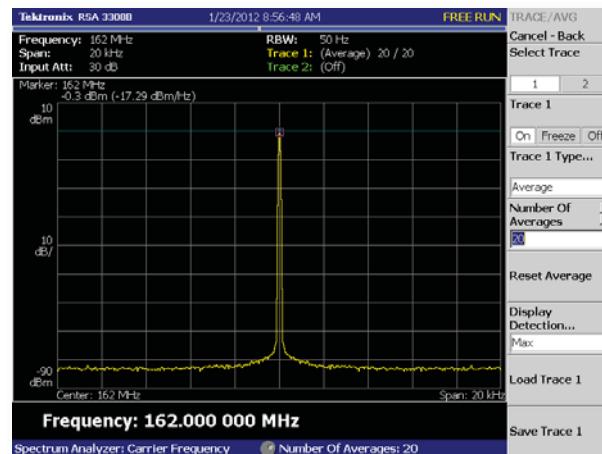

Comprehensive P25 test capability in a truly portable unit!

The R8000 is the only portable communications analyzer with a comprehensive suite of APCO P25 diagnostics. The R8000's P25 test functions are fully compliant with the TIA/EIA-102.CAAA measurement standard and include.

- Bit Error Rate (BER) test patterns
- Symbol Deviation
- Modulation Fidelity
- Frequency Error
- Power
- Eye Diagrams

BER testing

All 10 TIA specified test patterns for P25 radio receivers and all 7 TIA test patterns for radio transmitters are measured: 1011 Hz Tone, O.153, Busy, Calibration, Silence, Idle, AFC, Symbol Rate (Rx only), Low Deviation (Rx only), and C4FM Modulation Fidelity (Rx only).

P25 signal quality measurements


Modulation Fidelity indicates how far a P25 signal is from ideal theoretical modulation. Symbol Deviation is a convenient signal quality metric. A P25 radio with a perfect C4FM modulated signal should measure 1800 Hz. Significant variation from 1800 Hz indicates a potential transmitter problem. Frequency Error displays the difference between a P25 transmission carrier and operator-selected monitor frequency.

P25 Trunking


The P25 trunking option enables the R8000 to become a base station emulator and trunking controller. Default Frequency plans for the VHF/UHF, 700 MHz and 800 MHz bands are provided. The user may modify these plans as needed for channel bandwidth, duplex offset and the bands base frequency offering a complete and comprehensive test solution for all P25 trunked systems. Test functions include: *Control Channel Idle, Registration Request, Registration Grant, Traffic Channel Request/Grant, Voice Channel audio paths, including encryption if fitted, with Voice Loopback, Incoming call alert tone, and Voice call (1011Hz Tone)*.

Patented Voice Loop

The R8000's patented Voice Loop feature (U.S. patent 5703479) allows quick confirmation that P25 audio is being properly encoded and decoded by a subscriber unit. The user simply keys the radio and records up to 10 seconds of audio. When the radio is unkeyed, the R8000 automatically returns the recorded audio, which can then be heard over the radio's speaker. Recordings can be replayed as many times as needed.

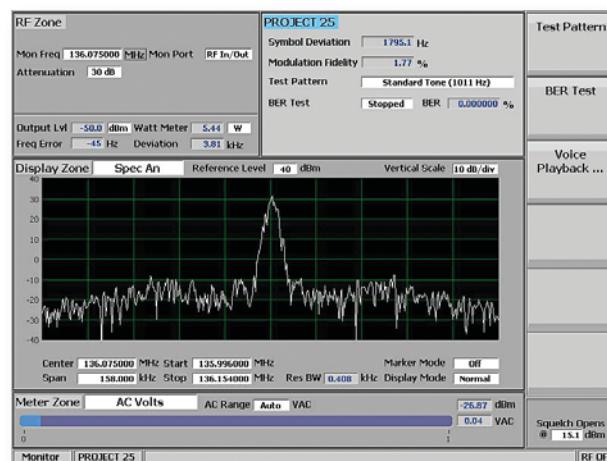

Comprehensive P25 Signal Quality Analysis

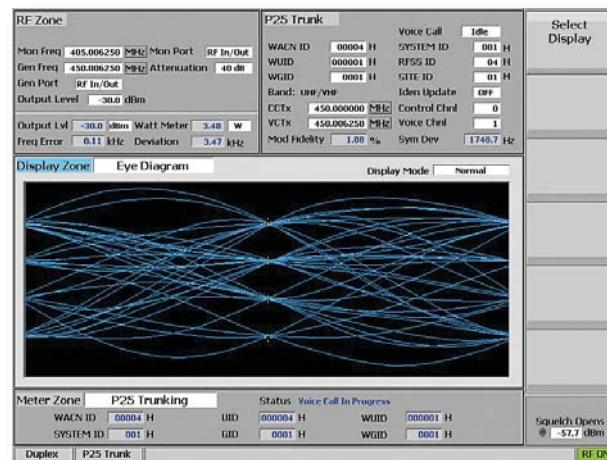

P25 Trunking with Eye Diagram


TETRA

The TETRA option allows quick RF performance testing of TETRA radios with a Direct Mode Operation (DMO) channel. Modulation performance can be evaluated using Error Vector Magnitude (EVM) measurements and viewing a constellation display. Radio sensitivity can be tested using a Loopback BER feature or paging sensitivity.


Radios can be verified to operate on channel and within timing and power requirements with measurement of:

- Carrier Frequency Offset
- Power Profile
- Unwanted Power
- Modulation Spectrum

The R8000 communications analyzer is the worlds only portable full-featured radio test set with the ability to test TETRA, APCO P25, DMR, NXDN and analog radios across the entire RF spectrum from 250 kHz to 3 GHz!

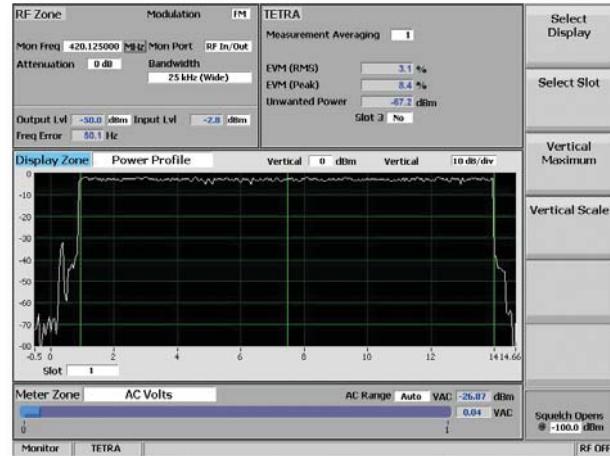

TETRA Power Profile

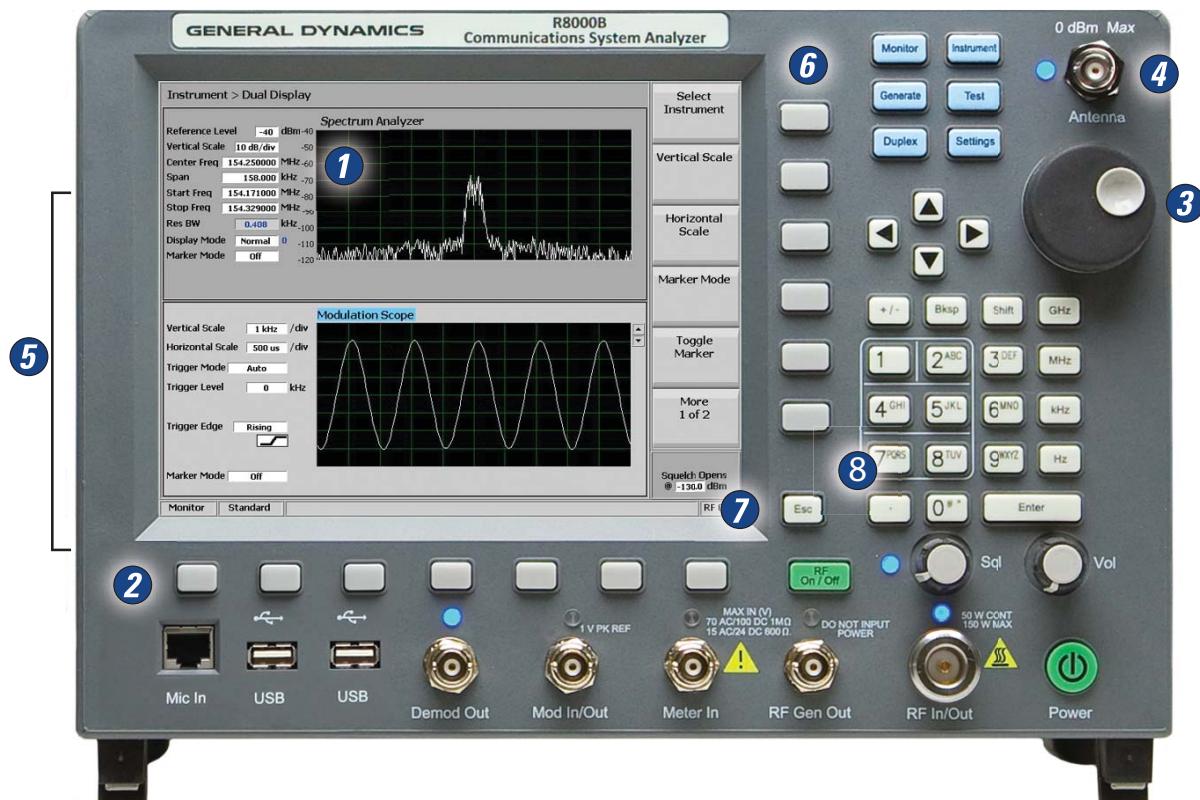

- 1) Bright 8.4" Color LCD with wide viewing angles
- 2) User-Friendly, softkey driven operation
- 3) Tuning Knob for quick and easy changes of numeric entries: Digital precision with an analog feel
- 4) Off-the-air antenna port for sensitive receiver measurements

- 5) VGA, Ethernet, Key Loader, and additional USB ports
- 6) One-touch mode keys take you directly to the instrument you need
- 7) Escape Key returns user to previous screen for easy navigation
- 8) Hot Keys for quick navigation from screen to screen

Digital Narrowband: DMR and NXDN Test Options

The migration to 6.25 kHz channel equivalency is moving faster and faster. The R8000 gives you the capability of maintaining radios and radio infrastructure for both major digital narrowband technologies: DMR and NXDN.


The R8000 features a Test option that allows testing of radios compliant with the ETSI Digital Mobile Radio (DMR) standard. The unit measures Bit Error Rate (BER) for all DMR specified test patterns, as well as RF input power and frequency error in both digital and analog modes. The R8000 fully supports MOTOTRBO™ Professional Digital Two-Way Radio System (Motorola's DMR implementation) using test procedures specified by Motorola engineers.

The R8000 NXDN mode provides a suite of test functions fully compliant with the Conformance Test


section of the NXDN Common Air Interface (CAI) standard. These include Symbol Deviation, Modulation Fidelity, BER, Frequency Error, and Power. This option also features the Voice Loopback feature used in the P25 option to provide audio verification of the radio's end-to-end operation.

The R8000 offers a radio service solution that was unimaginable just a few years ago: a multi-purpose communications analyzer with the performance of expensive stand-alone instruments, weighing just 14 pounds. It now adds to this powerful package the ability to test NXDN, DMR and P25 radios, making it the only sensible choice for today's radio service environment. And if your needs change tomorrow? No problem. The R8000's revolutionary, software-based architecture lets you add protocols and other options in a matter of seconds!

ONLY General Dynamics possesses the technology, experience, and commitment to the two-way radio market required to develop such a transformational product. With unmatched power, portability and expandability, the R8000 is the future of radio communications test equipment - available today.

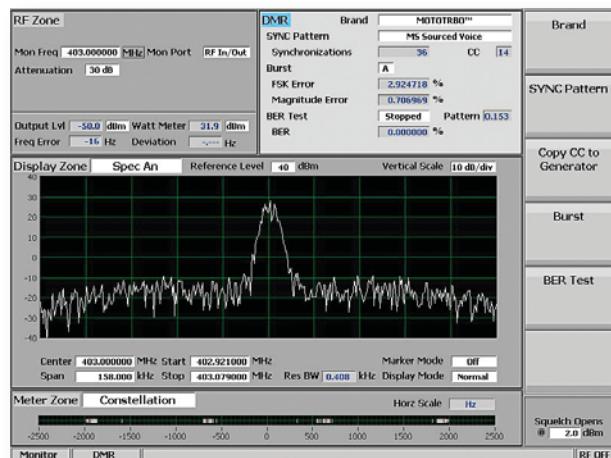

DMR Test Suite: Signal Quality Metrics and Constellation Display

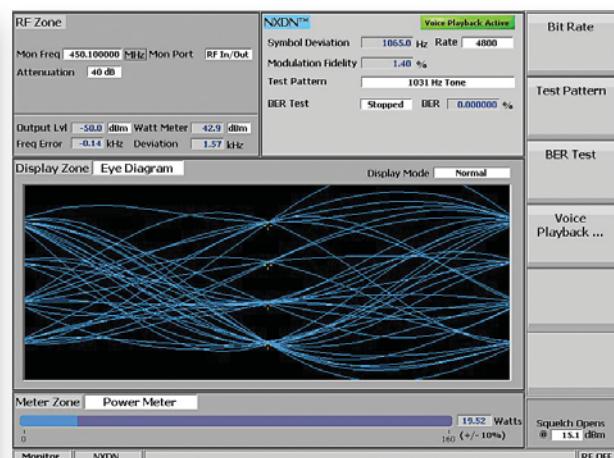

NXDN Test Suite: Signal Quality Metrics and Eye Diagram


The R8000 from General Dynamics: Comprehensive, state-of-the-art digital narrowband test capability in a portable software-defined analyzer.

AutoTune™ Automated Radio Test and Alignment

The R8000's AutoTune option performs all recommended factory test and alignment procedures in a fraction of the time needed to perform them manually. Just select your radio model and connect as shown on the R8000, choose the tests and alignments you wish to perform, then enter your operator ID and press the "start button."


Benefits:

- Test time reduced by over 80%
- Consistent manufacturer specified alignments among radios
- Accurate and repeatable test results
- Comprehensive test reports show before & after readings, time, date and operator identification
- Pass/Fail indicators flag radio defects
- Little or no technical expertise required
- Results are stored on the R8000 and can be exported to a USB drive for analysis with PC spreadsheet software

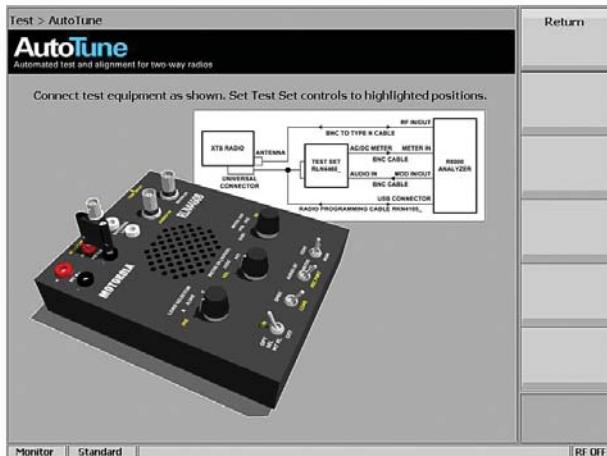

R8000 XTS AutoTune Setup Diagram

The R8000 automatically reads key radio information such as model number and serial number, and makes the measurements and alignments needed to bring the radio within factory specifications. Within minutes you have a complete record of your test session stored on the R8000 in comma delimited form for quick and easy recall. Over time you will build a complete test history for every radio – ideal for large fleets with formal Preventative Maintenance programs. Test reports can be conveniently viewed on the R8000 or exported for further analysis using spreadsheets and other data manipulation programs.

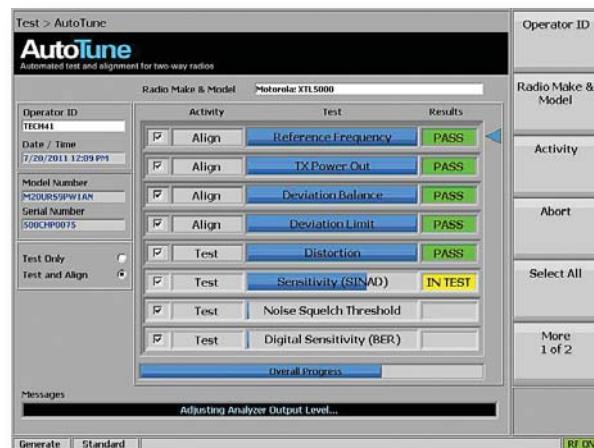

AutoTune Test Status Screen

Reduces radio test and alignment time from an hour or more to 10 - 12 minutes!

Tests and Alignments Performed:

Transmitter Tests

- Bit Error Rate (BER)
- Reference Frequency
- RF Output Power

Alignments

- Reference Oscillator
- Transmit Deviation Balance
- Transmit Deviation Limit
- Transmit Power Level

Receiver Tests

- Rated Audio
- Distortion
- SINAD Sensitivity
- Noise squelch
- Voice Modulation

Test Result Report						
Test Log		Export path: E:\GOSATCOM\Autotune\Results				
<hr/>						
Model #:	MOTOROLA_XTL5000	Date/Time:	7/20/2011 12:09 PM	Operator ID:	TECH41	
Serial #:	500CHP0075					
Comments:						
Reference Frequency Align						
Result	Frequency	Freq Error	Min Limit	Max Limit	Old Softpot	New Softpot
Pass	869.0075 MHz	17 Hz	-600 Hz	600 Hz	194	197
Power Detection Calibration						
Result	Frequency	Read Power	Target Power	Old Softpot	New Softpot	
Pass	000.0125 MHz	17.0 W	17.1 W	114	114	
TX Power Out Align						
Result	Frequency	Power Out	Min Limit	Max Limit		
Pass	763.0125 MHz	31.5 W	31.5 W	34.7 W		
Pass	763.0125 MHz	32.8 W	31.5 W	34.7 W		
Pass	775.9875 MHz	32.7 W	31.5 W	34.7 W		
Pass	794.0125 MHz	33.0 W	31.5 W	34.7 W		
Pass	808.9875 MHz	33.0 W	31.5 W	34.7 W		
Pass	808.9875 MHz	38.4 W	36.6 W	40.5 W		

AutoTune Test Report

R8000 AutoTune is now available for:

- Motorola XTL Series Mobiles
- Motorola XTS2500/5000 Portables
- Motorola APX Mobiles & Portables

Specifications

OPERATING/DISPLAY MODES

AM/FM Monitor	Spectrum Analyzer
AM/FM Generator	Frequency Counter
AM Modulation Meter	Frequency Error Meter
FM Deviation Meter	Digital Voltmeter
Audio Synthesizer	Power Meter
Duplex Generator	Oscilloscope
Tracking Generator (Opt.)	Signal Strength Meter
Dual Display (Opt.)	SINAD/Distortion Meter
Cable Fault Locator (Opt.)	

GENERAL

Displayed Average Noise Level (DANL):	-120 dBm (50 Ohm input termination)
Dynamic Range:	80 dB
Input Related Spurious:	-60 dBc max
Residual Spurious (non-input related):	-70 dBm
POWER	
DC Power Requirements:	24 VDC @ 5.0 A max
AC Adapter Specs:	100-240 VAC, 2.5 A max, 50-60 Hz
Battery Power:	Optional External Battery
Battery Operation:	1 hour minimum
MECHANICAL / ENVIRONMENTAL	
Weight:	<14 lbs (6.4 kg)
Dimensions:	9.4" (23.9 cm) H, 12.7" (32.3 cm) W, 7.5" (19.1 cm) D
Operating Altitude:	Up to 10,000 ft (3048 m)
Humidity:	80% maximum relative humidity
Operating Temperature:	0° to 50° C
Storage Temperature:	-30° to +80° C
WARRANTY	
Standard Warranty:	One year
Three Year Service Plan:	Optional
Five Year Service Plan:	Optional

GENERATOR (Receiver Test)

Port Protection Limit:	5W for 30 seconds
Frequency Range:	250 kHz to 1 GHz
Extended Frequency Range (Optional):	250 kHz to 3 GHz
Frequency Resolution:	1 Hz
OUTPUT LEVEL GENERATE PORT	
Range FM:	+5 dBm to -95 dBm below 2 GHz -5 dBm to -95 dBm above 2 GHz
Range AM:	-1 dBm to -95 dBm below 2 GHz -11 dBm to -95 dBm above 2 GHz
Resolution:	0.1 dB
Accuracy:	±2 dB
OUTPUT LEVEL RF I/O PORT	
Range FM:	-30 dBm to -130 dBm below 2 GHz -40 dBm to -130 dBm above 2 GHz
Range AM:	-36 dBm to -130 dBm below 2 GHz -46 dBm to -130 dBm above 2 GHz
Resolution:	0.1 dB
Accuracy:	±1 dB to 1GHz; ±2dB > 1 GHz
SPECTRAL PURITY	
Harmonic Spurious:	-20 dBc max
Non-Harmonic Spurious:	-35 dBc max
Residual FM:	4 Hz, 300 Hz to 3 kHz (< 1 GHz) 5 Hz, 300 Hz to 3 kHz (> 1 GHz)
Residual AM:	1.0% max, 300 Hz to 3 kHz
SSB Phase Noise (20 kHz Offset):	-95 dBc/Hz max below 1 GHz (15° to 35° C) -93 dBc/Hz max all frequencies (0° to 50° C)
FM MODULATION	
Deviation Accuracy:	5% of setting
Deviation Range:	0 to 75 kHz
Deviation Resolution:	10 Hz
Modulation Bandwidth:	5 Hz to 20 kHz

RECEIVER (Transmitter Test) (Cont.)

AM MODULATION	
AM Depth Range:	0 to 90%
Resolution:	1% of setting
Modulation Bandwidth:	100 Hz to 10 kHz
Accuracy:	5% of setting
MODULATION TYPES	1 kHz Tone, Private Line, Digital Private Line (w/ DPL Invert), Single Tone, DTMF, Two-Tone Paging, 5/6 Tone Paging, POCSAG, External Inputs from both a supplied microphone and BNC input.

RECEIVER (Transmitter Test)

Frequency Range:	250 kHz – 1 GHz (3 GHz optional)
SENSITIVITY	
Narrowband FM:	2.0 uV for 10 dB EIA SINAD
Wideband FM:	10 uV for 10 dB EIA SINAD
AM:	10 uV for 10 dB EIA SINAD
RF I/O PORT	
VSWR:	< 1.2 to 2 GHz, ≤ 1.5 to 3 GHz
Max Power:	50 W for 5 minutes 150 W for 30 seconds (30 sec. on, 5 min. off)
Absolute Max Power:	150 W
Alarm:	Internal temperature alarm
ANTENNA PORT	
Maximum Power:	0 dBm
Alarm:	+10 dBm
IF FILTERS:	6.25 kHz, 12.5 kHz, 25 kHz, 50 kHz, 100 kHz, 200 kHz
FREQUENCY ERROR MEASUREMENT	
Type of Display:	Autoranging
Resolution:	1 Hz
FM DEVIATION MEASUREMENT	
Demodulation Range:	Up to ±75 kHz
Accuracy:	±5% plus residual FM
Frequency Response:	Selectable per the following: Low Pass Filters: 300 Hz, 3 kHz, 20 kHz High Pass Filters: 1 Hz, 300 Hz, 3 kHz
Demodulation Output Level:	6.25 kHz B/W: 2.56V / 1 kHz 12.5 kHz B/W: 1.28V / 1 kHz 25 kHz B/W: 0.64V / 1 kHz 50 kHz B/W: 0.32V / 1 kHz 100 kHz B/W: 1.6V / 10 kHz 200 kHz B/W: 0.8V / 10 kHz
Demodulation Output Amplitude Flatness:	±0.2 dB (300 Hz to 3 kHz), 1 dB point @ 20 kHz
Demodulation Output Impedance:	100 ohms nominal
AM MODULATION MEASUREMENTS	
Demodulation Range:	0 to 100%
Accuracy:	±5% for levels below 80%
Frequency Response:	Selectable per the following: Low Pass Filters: 300 Hz, 3 kHz, 20 kHz High Pass Filters: 1 Hz, 300 Hz, 3 kHz
Demodulation Output Level:	0.8 V peak per 10% AM Modulation
Demodulation Output Amplitude Flatness:	±0.2 dB (300 Hz to 3 kHz), 1 dB point @ 20 kHz
Demodulation Output Impedance:	100 ohms nominal
RECEIVE SIGNAL STRENGTH LEVEL METER	
Frequency Range:	250 kHz – 1 GHz (3 GHz optional)
Accuracy:	±2 dB
Sensitivity:	-120 dBm (Antenna Port; Preamplifier on; 6.25 kHz IF B/W)

Specifications (Cont.)

RECEIVER (Transmitter Test) (Cont.)

BROADBAND POWER METER (RF In/Out Port)	
Frequency Range:	250 kHz – 1 GHz (3 GHz optional)
Measurement Range:	0.1 W to 150 W
Input Impedance:	50 Ohms w/ max. VSWR of 1.5:1
Accuracy:	±10% (250 kHz - 1 GHz); ±10% (1 GHz - 3 GHz < 2.5W)
Protection:	Over temp alarms
FREQUENCY COUNTER	
Frequency Range:	5 Hz to 100 kHz
Period Counter Range:	5 Hz to 20 kHz
Input Level:	0.1 V rms min
SINAD METER	
Accuracy:	±1 dB @ 12 dB SINAD
Input Level:	0.1 V rms min
DISTORTION METER	
Range:	1% to 20%
Distortion Accuracy:	The greater of: ±0.5% of distortion or ±10% of reading
Input Level:	0.1 V rms min
OPTIONAL DIGITAL DEMODULATION MODES	DMR (MOTOTRBO™), NXDN, P25

SPECTRUM ANALYZER

SWEEP	
Frequency Range:	250 kHz – 1GHz (3 GHz optional)
Frequency Resolution:	1 Hz
Span Accuracy:	5%
Update Rate:	~10 times per second (depending on span)
AMPLITUDE	
Level Accuracy:	±2 dB
Scales (dB/div):	10 (1, 2, & 5 w/ ESA option)
Log Linearity Accuracy:	< 0.1 dB
Reference Level Resolution:	1 dB
Reference Level Range:	+60 to -70 dB
Antenna Port	80 dB
Dynamic Range:	80 dB
T/R Port Dynamic Range:	+60 to -70 dB
Typical Noise Floor Performance:	-140 dBm
SSB Phase Noise (20 kHz Offset):	-95 dBc/Hz max below 1 GHz (15° to 35° C) -93 dBc/Hz max all frequencies (0° to 50° C)
Resolution Bandwidth	Auto Selected
Harmonic Spurious (Antenna Port, No Attenuation):	-20 dBc max
Non-Harmonic Spurious (Antenna Port, No Attenuation):	-60 dBc max
Residual Spurious (Input Terminated):	-70 dBm
Markers:	Delta, Absolute Level, and Frequency Standard, Average, Freeze, Max Hold, and Peak Hold

OSCILLOSCOPE

VERTICAL INPUT	
Input Impedance:	1 Meg Ohm / 600 Ohm (Selectable)
Range:	±100 VDC, ±70 Vrms AC
Accuracy:	5% of full scale
Bandwidth:	0 to 50 kHz
HORIZONTAL SWEEP	
Range:	20 uSec to 1 Sec / div. (Selectable)
TRIGGER SELECTION	Normal, Auto (Free Running), Single Sweep

OSCILLOSCOPE (Cont.)

SPECIAL FUNCTIONS	
Markers:	Delta Voltage, Delta Frequency, Delta Period

AUDIO MODULATION SYNTHESIZER

Modulation Types:	1 kHz tone, Private Line, Digital Private Line (w/ DPL Invert), Single Tone, DTMF, Two-Tone Paging, 5/6 Tone Paging, POCSAG, A&B Independent Synths., EURO Tones, User Defined Tone Sequences, and External inputs from both a supplied micro-phone and BNC input.
Modulation Output Level:	Programmable to ±8 V peak
Amplitude Flatness:	±0.2 dB (300 Hz to 3 kHz), 1 dB point @ 20 kHz
1 kHz Tone Distortion:	Not to exceed 1% THD
Impedance:	100 Ohms
External Modulation Input Level:	±1 V peak reference
Amplitude Flatness:	±0.2 dB (300 Hz to 3 kHz), 1 dB point @ 20 kHz
Impedance:	600 Ohms
External Microphone Input Amplitude Flatness:	±0.2 dB (300 Hz to 3 kHz), 1 dB point @ 20 kHz

TRACKING GENERATOR

Frequency Range:	250 kHz – 1GHz (3 GHz optional)
-------------------------	---------------------------------

DIGITAL VOLTMETER (DVM)

Input Impedance:	1 Meg Ohm / 600 Ohm (Selectable)
Voltage Range:	1 V, 10 V, 70 V full scale
Frequency Range:	50 Hz to 20 kHz
DC Accuracy:	1% full scale ±1 LSB
AC Accuracy:	5% full scale ±1 LSB

TIMEBASE

Output Frequency:	10 MHz
Stability:	Aging: ±0.1 ppm / year Temp.: ±0.01 ppm
Output Level:	Minimum 0 dBm into 50 Ohms
Warm Up:	3 minutes: within ±0.1 ppm


DISPLAY

FRONT PANEL DISPLAY	
Resolution:	800 x 600
Size:	8.4" (21.3 cm) Full Color LCD
EXTERNAL DISPLAY	VGA

REMOTE INTERFACE (Optional Feature)

Remote Front Panel	Available over Ethernet
---------------------------	-------------------------



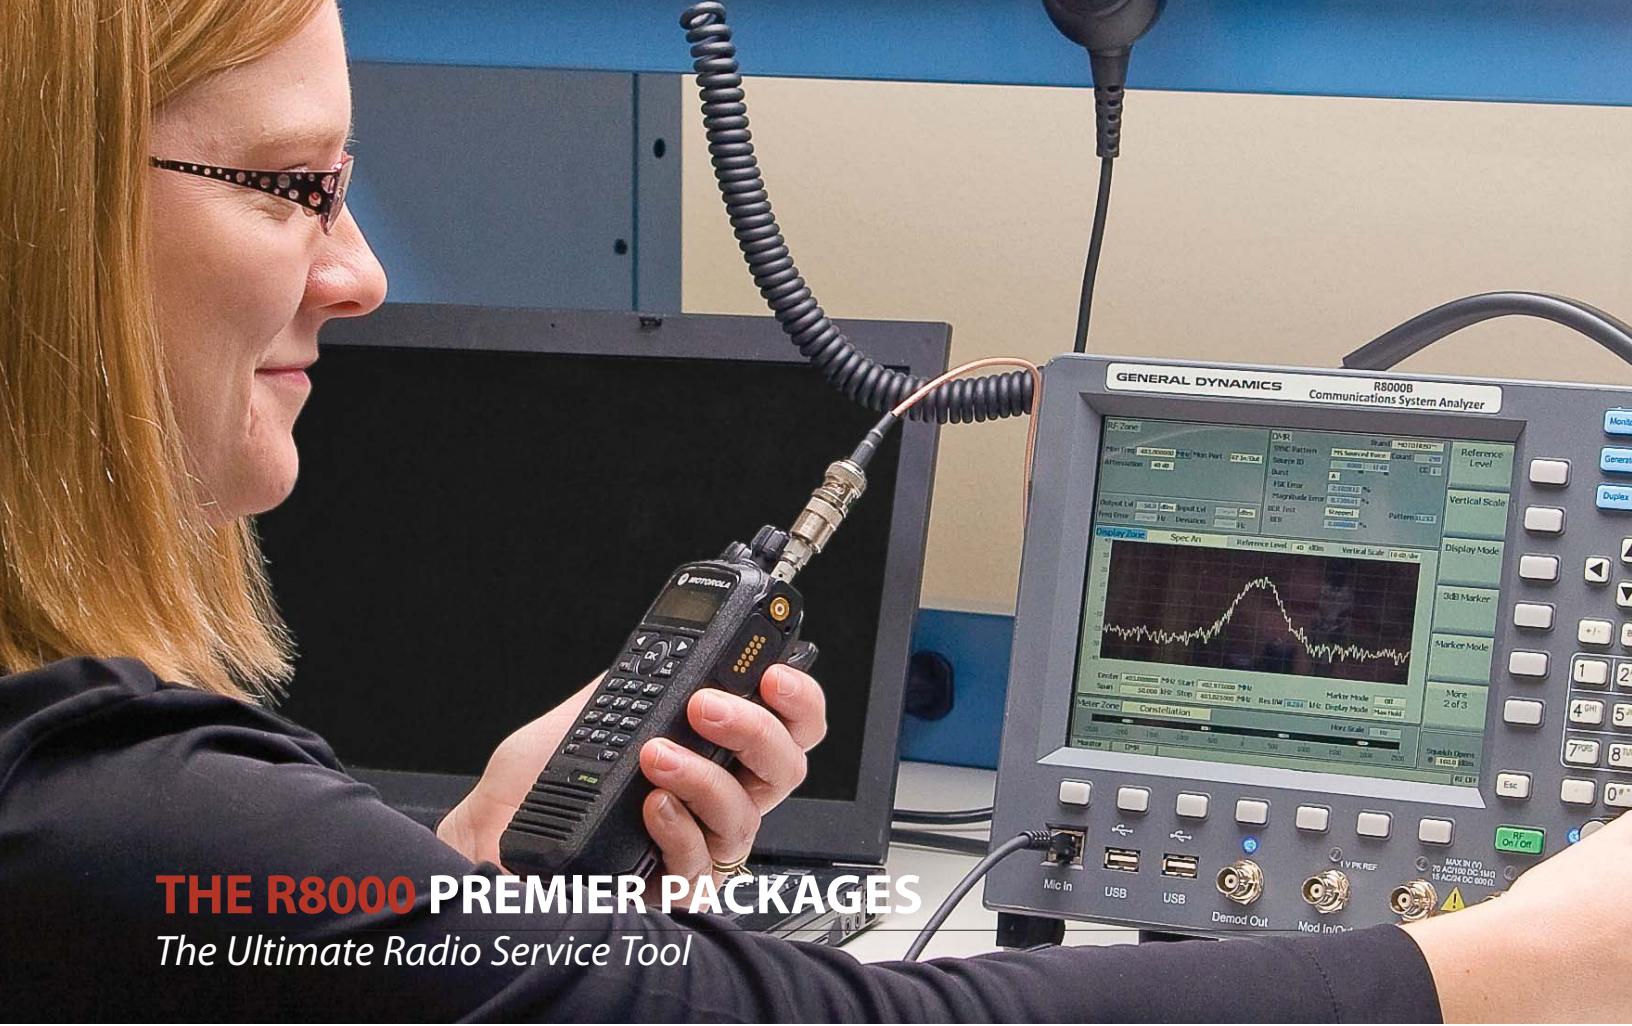

THE R8000 PREMIER PACKAGES

The Ultimate Radio Service Tool

The R8000B PREMIER PACKAGES are the best values available in communications test equipment.

In addition to the original 3 GHz Premier Package, General Dynamics now offers a 1 GHz version. The 1 GHz Package offers the same value-packed option bundle as the 3 GHz Package, but substitutes a 3 year service plan for 3 GHz capability for customers whose test requirements don't extend beyond 1 GHz.

Both packages include the following options standard:

- Tracking Generator – A must for tuning cavities, duplexers and filters
- Enhanced Spectrum Analyzer – Includes our proprietary DualScope display which shows the carrier signal and modulation scope simultaneously
- Remote Front Panel – Operates all functions of the unit from a networked PC
- Cable Fault Locator
- Soft Carrying Case

Whichever version of the Premier Package you chose, you will own the new industry standard in communications test equipment. No other product offers a remotely comparable combination of features, portability, expandability and cost-effectiveness. And because it's a General Dynamics product, you know you can count on world-class reliability and after-sale support.

The World's Most Future-Proofed Radio Test Set

With the R8000B, you have a test set that is not only state-of-the-art, but state-of-tomorrow's-art. We continue to add capabilities with frequent firmware releases, all of which are downloadable from our web site ***free for the life of the unit.***

And if you find yourself maintaining radios requiring a new type of protocol, or need an option you didn't originally purchase, simply order the protocol or option you need, enter the installation key, and you will have your new feature instantly. Software options can also be added via the front panel in less than a minute – you don't need to send the unit to a service facility and be without it for even a day.

Ordering Information

Model

	Description
R8000B	Communications System Analyzer, 1 GHz
R8000B-1GHz Premier	1 GHz Premier Package, w/ highlighted options
R8000B-3GHz Premier	3 GHz Premier Package, w/ highlighted options



Options & Accessories

Part Number	Description	R8000B	R8000B-1GHz Premier	R8000B-3GHz Premier
R8-Remote	Remote Front Panel	OPTIONAL	✓	✓
R8-TG	Tracking Generator	OPTIONAL	✓	✓
R8-ESA	Enhanced Spectrum Analyzer	OPTIONAL	✓	✓
R8-CF	Cable Fault Locator	OPTIONAL	✓	✓
R8-SC	Soft Carry Case	OPTIONAL	✓	✓
R8-3G	3 GHz Operation	OPTIONAL	OPTIONAL	✓
R8-3Y	Three Year Service Plan	OPTIONAL	✓	OPTIONAL
R8-5Y	Five Year Service Plan	OPTIONAL	OPTIONAL	OPTIONAL
R8-DMR	DMR (MOTOTRBO™) Test	OPTIONAL	OPTIONAL	OPTIONAL
R8-NXDN	NXDN Test	OPTIONAL	OPTIONAL	OPTIONAL
R8-P25	APCO Project 25	OPTIONAL	OPTIONAL	OPTIONAL
R8-P25TRNK	APCO Project 25 Trunking Test(Requires R8-P25)	OPTIONAL	OPTIONAL	OPTIONAL
R8-TETRA	TETRA Subscriber Test	OPTIONAL	OPTIONAL	OPTIONAL
R8-AT_XTL	AutoTune for Motorola XTL Series Mobile Radios	OPTIONAL	OPTIONAL	OPTIONAL
202161-01	Audio Breakout Box for XTL Radios	OPTIONAL	OPTIONAL	OPTIONAL
R8-AT_XTS	AutoTune for Motorola XTS2500/XTS5000 Portable Radios	OPTIONAL	OPTIONAL	OPTIONAL
R8-HC	Protective "Glove Case"	OPTIONAL	OPTIONAL	OPTIONAL
R8-TC	Transit Case with Foam Molding for R8000	OPTIONAL	OPTIONAL	OPTIONAL
R8-TSC	Transit Case with Foam Molding for Soft Carry Case R8-SC	OPTIONAL	OPTIONAL	OPTIONAL
201915-01	Battery Pack, Detachable, 10A	OPTIONAL	OPTIONAL	OPTIONAL
01-80302E82	Isolation Transformer for Baseband Output (600 Ω)	OPTIONAL	OPTIONAL	OPTIONAL
01-80302E83	Isolation Transformer for Meter Input (600 Ω)	OPTIONAL	OPTIONAL	OPTIONAL
R8-VSWR	Antenna Return Loss Bridge Kit	OPTIONAL	OPTIONAL	OPTIONAL

✓ = Included

Accessories included with every unit:

- Antenna
- Microphone
- Oscilloscope Probe
- Power Cord
- Users manual CD
- 24V to 12V Converter

Additional accessories sold separately:



R8-HC Protective Glove Case



R8-TC / R8-TSC Transit Cases



R8-VSWR Bridge Kit

Service, maintenance and technical support

For support on General Dynamics test equipment contact:

United States:

General Dynamics SATCOM Technologies, Inc.
3750 W. Loop 281
Longview, TX 75604
Phone: (903) 381-4156
E-mail: LV_CustomerService@gdsatcom.com

Canada:

Navair Technologies
6375 Dixie Road
Mississauga, Ontario
Canada, L5T2E7
Phone: (800) 668-7440
E-mail: Service@navair.com

Japan and Korea:

Nextec Japan Ltd.- Nextec High Tech Center
10-8 Mitsuzawanakamachi, Kanagawa Ward
Yokohama City, Japan 221-0851
Phone: +81-45-410-2287



Australia and New Zealand:

Australian Support Center
Motorola Solutions
10 Wesley Court
Tally Ho Business Park
East Burwood, VIC 3151
Australia
Phone: +61-3-9847-7725

Asia and the Pacific Rim (excluding Japan), Europe, Latin America, Middle East, and Africa:

General Dynamics SATCOM Technologies, Inc.
3750 W. Loop 281
Longview, TX 75604
Phone: (903) 381-4156
E-mail: LV_CustomerService@gdsatcom.com



Complies With
UL 61010-1
CSA C22.2 No. 61010-1



All trademarks indicated as such herein are trademarks of General Dynamics® Reg. U.S. Pat. & Tm. Off. MOTOTRBO is registered in the U.S. Patent and Trademark Office by Motorola, Inc. All other product or service names are the property of their respective owners. © 2009 General Dynamics. All rights reserved. General Dynamics reserves the right to make changes in its products and specifications at any time and without notice.

GENERAL DYNAMICS
SATCOM Technologies

3750 W. Loop 281, Longview, TX 75604
Telephone: (903) 295-1480 • Fax: (903) 295-1479 • Email: cte@gdsatcom.com

Please visit our web site at www.gdsatcom.com/cte.php