



R&S® FSH4/R&S® FSH8 Spectrum Analyzer Specifications



CONTENTS

Specifications.....	3
Frequency	3
Sweep time	3
Bandwidths	4
Level	4
Trigger functions	6
Inputs and outputs	7
Vector network analysis/vector voltmeter	8
<i>Model .24/.28 with R&S®FSH-K42/R&S®FSH-K45 option.....</i>	<i>8</i>
Scalar network analysis	10
<i>Model .24/.28 without R&S®FSH-K42 option</i>	<i>10</i>
Distance-to-fault analysis.....	11
<i>Model .24/.28 with R&S®FSH-K41 option.....</i>	<i>11</i>
R&S®FSH-K44 3GPP WCDMA BTS/NodeB pilot channel and pilot EVM measurement application	
R&S®FSH-K44E 3GPP WCDMA BTS/NodeB code domain power and EVM measurement application	
with HSDPA/HSPA+ analyzer	11
R&S®FSH-K46 CDMA2000® BTS pilot channel and EVM measurement application	
R&S®FSH-K46E CDMA2000® BTS code domain power measurement application.....	13
R&S®FSH-K47 1xEV-DO® BTS pilot channel and EVM measurement application.....	14
R&S®FSH-K50/R&S®FSH-K51 LTE FDD/TDD downlink pilot channel and EVM measurement application	
R&S®FSH-K50E/R&S®FSH-K51E LTE FDD/TDD downlink extended channel and modulation measurement application	15
General data	16
Accessories.....	18
<i>R&S®FSH-Z1 and R&S®FSH-Z18 power sensors.....</i>	<i>18</i>
<i>R&S®FSH-Z14 directional power sensor.....</i>	<i>18</i>
<i>R&S®FSH-Z44 directional power sensor.....</i>	<i>20</i>
<i>R&S®HA-Z240 GPS receiver.....</i>	<i>21</i>
Ordering information	22
Options.....	22
Accessories.....	23
R&S®NRP-Zxx power sensors supported by the R&S®FSH4/R&S®FSH8	24
Service options	24

Specifications

Specifications apply under the following conditions:

15 minutes warm-up time at ambient temperature, specified environmental conditions met, calibration cycle adhered to.

Data without tolerances: typical values only. Data designated as "nominal" applies to design parameters and is not tested. Data without tolerance limits is not binding.

Frequency

Frequency range	R&S®FSH4 model .04/.14	9 kHz to 3.6 GHz
	R&S®FSH8 model .08/.18	9 kHz to 8 GHz
	R&S®FSH4 model .24	100 kHz to 3.6 GHz
	R&S®FSH8 model .28	100 kHz to 8 GHz
Frequency resolution		1 Hz

Reference frequency, internal		
Aging per year		1×10^{-6}
Temperature drift	0 °C to +30 °C	1×10^{-6}
	+30 °C to +50 °C	3×10^{-6}
Achievable initial calibration accuracy		5×10^{-7}
Total reference uncertainty		(time since last adjustment × aging rate) + temperature drift + calibration accuracy
Reference frequency, with R&S® HA-Z240 GPS receiver option		
Frequency uncertainty	GPS ON, ≥ 1 minute after satellite lock	$\pm 2.5 \times 10^{-8}$
	up to 30 minutes after losing satellite lock	$\pm 5 \times 10^{-8}$

Frequency readout		
Marker resolution		0.1 Hz
Uncertainty		$\pm(\text{marker frequency} \times \text{reference uncertainty} + 10 \% \times \text{resolution bandwidth} + \frac{1}{2} (\text{span} / (\text{sweep points} - 1) + 1 \text{ Hz}))$
Number of sweep (trace) points		631
Marker tuning frequency step size		span/630
Frequency counter resolution		0.1 Hz
Count uncertainty	SNR > 25 dB	$\pm(\text{frequency} \times \text{reference uncertainty} + \frac{1}{2} (\text{last digit}))$
Frequency span		0 Hz, 10 Hz to 3.6/8 GHz
Span uncertainty		nominal 1 %

Spectral purity SSB phase noise		
Carrier offset	30 kHz	f = 500 MHz < -95 dBc (1 Hz), typ. -105 dBc (1 Hz)
	100 kHz	< -100 dBc (1 Hz), typ. -110 dBc (1 Hz)
	1 MHz	< -120 dBc (1 Hz), typ. -127 dBc (1 Hz)

Sweep time

Sweep time	span = 0 Hz	200 μs to 100 s
	10 Hz ≤ span ≤ 600 MHz	20 ms to 1000 s
	span > 600 MHz	20 ms × span/600 MHz to 1000 s
Uncertainty	span = 0 Hz	nominal 1 %
	span ≥ 10 Hz	nominal 3 %

Bandwidths

Resolution bandwidths		
Range	-3 dB bandwidth	1 Hz to 3 MHz in 1/3 sequence
Bandwidth accuracy	$1 \text{ Hz} \leq \text{RBW} \leq 300 \text{ kHz}$	nominal < 5 %
	$\text{RBW} > 300 \text{ kHz}$	nominal < 10 %
Selectivity 60 dB:3 dB		nominal < 5 (Gaussian type filters)
Video filters		
Range	-3 dB bandwidth	1 Hz to 3 MHz in 1/3 sequence

Level

Display range		displayed noise floor to +30 dBm
Maximum rated input level with RF attenuation ≥ 10 dB		
DC voltage	model .04/.08/.14/.18	80 V
	model .24/.28	50 V
CW RF power		30 dBm (= 1 W)
Peak RF power	duration < 3 s	33 dBm (= 2 W)
Max. pulse voltage		150 V
Max. pulse energy	pulse width 10 μ s	10 mWs
Maximum rated input level with RF attenuation < 10 dB		
DC voltage		50 V
CW RF power		20 dBm (= 100 mW)
Peak RF power	duration < 3 s	23 dBm (= 200 mW)
Max. pulse voltage		50 V
Max. pulse energy	pulse width 10 μ s	1 mWs
Intermodulation		
Third-order intercept (TOI), nominal values	intermodulation-free dynamic range, signal level 2×-20 dBm, RF attenuation = 0 dB, RF preamplifier = OFF	
	$f_{in} < 300 \text{ MHz}$	> 54 dBc (TOI > +7 dBm, typ. +11 dBm)
	$300 \text{ MHz} \leq f_{in} < 3.6 \text{ GHz}$	> 60 dBc (TOI > +10 dBm, typ. +15 dBm)
	$3.6 \text{ GHz} \leq f_{in} \leq 8 \text{ GHz}$	> 46 dBc (TOI > +3 dBm, typ. +10 dBm)
	intermodulation-free dynamic range, signal level 2×-40 dBm, RF attenuation = 0 dB, RF preamplifier = ON	
	$f_{in} < 300 \text{ MHz}$	> 50 dBc (TOI > -15 dBm)
$300 \text{ MHz} \leq f_{in} \leq 8 \text{ GHz}$	> 56 dBc (TOI > -12 dBm)	
Second harmonic intercept (SHI), nominal values	RF attenuation = 0 dB, RF preamplifier = OFF	
	$f_{in} = 20 \text{ MHz to } 1.5 \text{ GHz}$	+40 dBm
	$f_{in} = 1.5 \text{ GHz to } 3 \text{ GHz}$	+30 dBm
	$f_{in} = 3 \text{ GHz to } 4 \text{ GHz}$	+20 dBm
	RF attenuation 0 dB, RF preamplifier = ON	
$f_{in} = 100 \text{ MHz to } 4 \text{ GHz}$	0 dBm	
Displayed average noise level		
0 dB RF attenuation, termination 50 Ω , RBW = 100 Hz, VBW = 10 Hz, sample detector, log scaling, tracking generator OFF, normalized to 1 Hz frequency		
		preamplifier = OFF
9 kHz to 100 kHz (models .04/.14/.08/.18 only)		< -108 dBm, typ. -118 dBm
100 kHz to 1 MHz		< -115 dBm, typ. -125 dBm
1 MHz to 10 MHz		< -136 dBm, typ. -144 dBm
10 MHz to 2 GHz		< -141 dBm, typ. -146 dBm
2 GHz to 3.6 GHz		< -138 dBm, typ. -143 dBm
3.6 GHz to 5 GHz		< -142 dBm, typ. -146 dBm
5 GHz to 6.5 GHz		< -140 dBm, typ. -144 dBm
6.5 GHz to 8 GHz		< -136 dBm, typ. -141 dBm
		preamplifier = ON
100 kHz to 1 MHz		< -133 dBm, typ. -143 dBm
1 MHz to 10 MHz		< -157 dBm, typ. -161 dBm
10 MHz to 1 GHz		< -161 dBm, typ. -165 dBm
1 GHz to 2 GHz		< -159 dBm, typ. -163 dBm
2 GHz to 5 GHz		< -155 dBm, typ. -159 dBm
5 GHz to 6.5 GHz		< -151 dBm, typ. -155 dBm
6.5 GHz to 8 GHz		< -147 dBm, typ. -150 dBm

Adjacent channel leakage power ratio (ACLR)		
Dynamic range	frequency < 3.6 GHz, total power > -20 dBm	
	3GPP WCDMA	
	adjacent channel	nominal > 55 dB
	alternate channel	nominal > 58 dB
	CDMA2000®	
	adjacent channel	nominal > 58 dB
	alternate channel	nominal > 61 dB
Immunity to interference, nominal values		
Image frequencies	serial number < 105000	
	$f_{in} - 2 \times 21.4$ MHz	< -70 dBc, typ. -80 dBc
	$f_{in} - 2 \times 831.4$ MHz	< -70 dBc, typ. -90 dBc
	$f_{in} - 2 \times 4881$ MHz	-60 dBc
	serial number \geq 105000	
	$f_{in} - 2 \times 54.4$ MHz	< -70 dBc, typ. -80 dBc
	$f_{in} - 2 \times 860.8$ MHz	< -70 dBc, typ. -90 dBc
	$f_{in} - 2 \times 4892.8$ MHz	-60 dBc
Intermediate frequencies	serial number < 105000	
	21.4 MHz, 831.4 MHz, 4881.4 MHz	< -60 dBc, typ. -80 dBc
	8931.4 MHz	-50 dBc
	serial number \geq 105000	
	54.4 MHz, 860.8 MHz, 4892.8 MHz	< -60 dBc, typ. -80 dBc
	8924.8 MHz	-50 dBc
Other interfering signals, signal level – RF attenuation < -20 dBm	serial number < 105000	
	$f \leq 3.6$ GHz, spurious at $f_{in} - 2440.7$ MHz	< -60 dBc
	3.6 GHz < $f \leq 8$ GHz, spurious at $f_{in} - 4465.7$ MHz	< -60 dBc
	serial number \geq 105000	
	$f \leq 3.6$ GHz, spurious at $f_{in} - 2446.4$ MHz	< -60 dBc
	3.6 GHz < $f \leq 8$ GHz, spurious at $f_{in} - 4462.4$ MHz	< -60 dBc
Other interfering signals, related to local oscillators	$f \leq 3.6$ GHz	
	$\Delta f < 300$ kHz	-60 dBc
	$\Delta f \geq 300$ kHz	< -60 dBc
	$f > 3.6$ GHz	
	$\Delta f < 300$ kHz	-54 dBc
	$\Delta f \geq 300$ kHz	< -54 dBc
	$f =$ receive frequency	
Residual spurious response	input matched with 50 Ω , without input signal, RBW \leq 30 kHz, $f \geq 3$ MHz, RF attenuation = 0 dB, tracking generator OFF	< -90 dBm
Level display		
Logarithmic level axis		1/2/5/10/20/50/100 dB, 10 divisions
Linear level axis		0 % to 100 %, 10 divisions
Number of traces		2
Trace detectors		max peak, min peak, auto peak, sample, RMS
Trace functions		clear/write, max hold, min hold, average, view
Setting range of reference level		-80 dBm to +30 dBm
Units of level axis		dBm, dBmV, dB μ V, V, W

Level measurement uncertainty		
Absolute level uncertainty at 100 MHz	+20 °C to +30 °C	< 0.3 dB
Frequency response (+20 °C to +30 °C)	9 kHz ≤ f < 100 kHz (models .04/.14/.08/.18 only)	nominal < 1.5 dB
	100 kHz ≤ f < 10 MHz	nominal < 1.5 dB
	10 MHz ≤ f ≤ 3.6 GHz	< 1 dB
	3.6 GHz < f ≤ 8 GHz	< 1.5 dB
Attenuator uncertainty		< 0.3 dB
Uncertainty of reference level setting		nominal < 0.1 dB
Display nonlinearity	SNR > 16 dB, 0 dB to –50 dB, logarithmic level display	< 0.2 dB
Bandwidth switching uncertainty	reference: RBW = 10 kHz	nominal < 0.1 dB
Total measurement uncertainty	95 % confidence level, +20 °C to +30 °C, SNR > 16 dB, 0 dB to –50 dB below reference level, RF attenuation auto	
	10 MHz ≤ f ≤ 3.6 GHz	< 1 dB, typ. 0.5 dB
	3.6 GHz < f ≤ 8 GHz	< 1.5 dB, typ. 1 dB

Trigger functions

Trigger		
Trigger source		free run, video, external
External trigger level threshold	low → high transition	2.4 V
	high → low transition	0.7 V
Gated trigger		
Gate source		external
Gate delay		10 μs to 100 s, min. resolution 10 μs (or 1 % of delay)
Gate length		10 μs to 100 s, min. resolution 10 μs (or 1 % of gate length)

Inputs and outputs


RF input		
Impedance		50 Ω
Connector		N female
VSWR	100 kHz \leq f \leq 1 GHz	nominal < 1.5
	1 GHz < f \leq 6 GHz	nominal < 2
	6 GHz < f \leq 8 GHz	nominal < 3
Input attenuator	RF input only	0 dB to 40 dB in 5 dB steps
AF output		
AF demodulation types		AM and FM
Connector		3.5 mm mini jack
Output impedance		nominal 32 Ω
Voltage (open circuit)		V _{RMS} adjustable from 0 V to > 100 mV
Power sensor		
Connector		7-contact female (type Binder 712)
Power sensors supported		see accessories
Tracking generator (models .14/.18/.24/.28 only)		
Frequency range	models .14 and .24	100 kHz to 3.6 GHz
	models .18 and .28	100 kHz to 8 GHz
Connector		N female, 50 Ω
VSWR	100 kHz \leq f \leq 1 GHz	nominal < 1.5
	1 GHz < f \leq 6 GHz	nominal < 2
	6 GHz < f \leq 8 GHz, models .18 and .28	nominal < 3
Output level	tracking generator attenuation = 0 dB	nominal 0 dBm
Tracking generator attenuator		0 dB to 40 dB in 1 dB steps
Dynamic range for isolation measurements	RF attenuation = 0 dB, tracking generator attenuation = 10 dB, RBW = 1 kHz	
	100 kHz \leq f < 300 kHz	> 60 dB, typ. 80 dB
	300 kHz \leq f < 6 GHz	> 70 dB, typ. 90 dB
	6 GHz \leq f < 8 GHz, models .18 and .28	typ. > 50 dB
Reverse power		
DC voltage		50 V
CW RF power		+20 dBm (= 0.1 W)
Max. pulse voltage		50 V
Max. pulse energy (10 μ s)		1 mWs
External reference, external trigger, DC bias port 2 (BNC 1)		
Connector		BNC, 50 Ω
Mode	selectable	ext. reference, ext. trigger, DC bias port 2
External reference	required level	0 dBm
	frequency	10 MHz
External trigger threshold	low \rightarrow high transition	2.4 V
	high \rightarrow low transition	0.7 V
DC bias port 2	max. rated input voltage	50 V
	max. rated input current	600 mA
IF out, DC bias port 1 (BNC 2)		
Connector		BNC, 50 Ω
Mode	selectable	IF out, DC bias port 1
IF out frequency	serial number < 105000	21.4 MHz
	serial number \geq 105000	54.4 MHz
DC bias port 1	max. rated input voltage	50 V
	max. rated input current	600 mA
AUX		
Connector		7-contact female (type Binder 712)

Vector network analysis/vector voltmeter

Model .24/.28 with R&S®FSH-K42/R&S®FSH-K45 option


Frequency range	R&S®FSH4 model .24 R&S®FSH8 model .28	300 kHz to 3.6 GHz 300 kHz to 8 GHz
Frequency resolution		1 Hz
Data points		631
Port power	controlled via tracking generator attenuation	nominal 0 dBm to -40 dBm in 1 dB steps
Reflection measurement		
Result formats	measurement mode = vector measurement mode = vector voltmeter	magnitude, phase, magnitude + phase, VSWR, reflection coefficient, Smith chart, cable loss, group delay, electrical length magnitude + phase, Smith chart
Return loss		
Range	selectable	1/2/5/10/20/50/100 dB, linear 100 %
Resolution		0.01 dB
Measurement uncertainty		see figure "Uncertainty of reflection measurement with the R&S®FSH-K42/R&S®FSH-K45 option"
One-port phase		
Range	selectable	90/180/360/1000° to 10000° in 1/2/5 steps
Resolution		0.01°
Measurement uncertainty	specifications are based on a matched DUT, RBW = 100 Hz, RF attenuation = 10 dB, nominal source power = 0 dBm, +20 °C to +30 °C	
	300 kHz ≤ f ≤ 3.6 GHz	
	0 dB ≤ return loss < 15 dB	nominal < 3°
	15 dB ≤ return loss < 25 dB	nominal < 6°
	25 dB ≤ return loss < 35 dB	nominal < 20°
	3.6 GHz < f ≤ 8 GHz (R&S®FSH8 only)	
	0 dB ≤ return loss < 15 dB	nominal < 3°
	15 dB ≤ return loss < 25 dB	nominal < 6°
	25 dB ≤ return loss < 35 dB	nominal < 20°
VSWR		
Range	selectable	1 to 1.1, 1.5, 2, 6, 11, 21 or 71
Smith chart		
Range		1, zoom × 2, × 4, × 8
Reflection coefficient		
mRho	range	1 to 1000 in 1, 2, 5 steps
Corrected directivity	300 kHz ≤ f ≤ 3 GHz	nominal > 43 dB
	3 GHz < f ≤ 6 GHz	nominal > 37 dB
	6 GHz < f ≤ 8 GHz	nominal > 31 dB
Corrected test port match	300 kHz ≤ f ≤ 3 GHz	nominal > 40 dB
	3 GHz < f ≤ 6 GHz	nominal > 37 dB
	6 GHz < f ≤ 8 GHz	nominal > 30 dB

Uncertainty of reflection measurement with R&S®FSH-K42/-K45 option

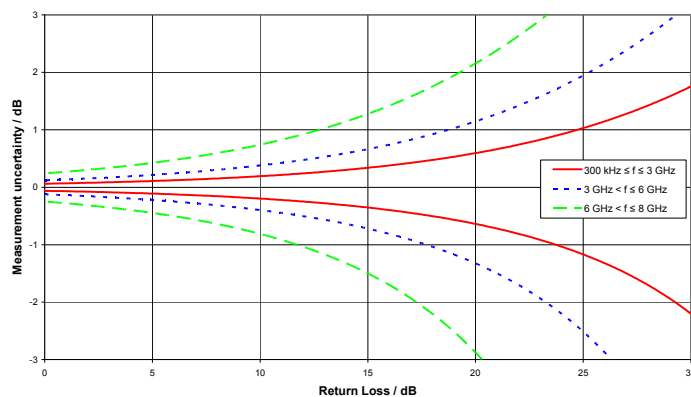

Uncertainty of reflection measurement with the R&S®FSH-K42/ R&S®FSH-K45 option.

Transmission measurement		
Result formats	measurement mode = vector	magnitude, phase, magnitude + phase, group delay, electrical length
	measurement mode = vector voltmeter	magnitude + phase
Gain		
Measurement range		-120 dB to +80 dB
Display range	selectable	1/2/5/10/20/50/100 dB, linear 100 %
Resolution		0.01 dB
Measurement uncertainty	calibration method = Full Two Port High Accuracy	see figure "Transmission magnitude uncertainty"
Phase		
Range	selectable	90/180/360/1000° to 10000° in 1/2/5 steps
Resolution		0.01°
Measurement uncertainty	specifications are based on a matched DUT, RBW = 100 Hz, RF attenuation = 10 dB, nominal source power = 0 dBm, +20 °C to +30 °C	
	300 kHz ≤ f ≤ 50 MHz	
	0 dB ≤ insertion loss < 40 dB	nominal < 2°
	50 MHz < f ≤ 3.6 GHz	
	0 dB ≤ insertion loss < 50 dB	nominal < 2°
	50 dB ≤ insertion loss < 70 dB	nominal < 3°
	3.6 GHz < f < 6 GHz (R&S®FSH8 only)	
	0 dB ≤ insertion loss < 50 dB	nominal < 2°
	50 dB ≤ insertion loss < 70 dB	nominal < 3°
	6 GHz ≤ f < 8 GHz (R&S®FSH8 only)	
0 dB ≤ insertion loss < 50 dB	nominal < 3°	
50 dB ≤ insertion loss < 70 dB	nominal < 5°	
Dynamic range from port 1 to port 2	RF attenuation = 0 dB, tracking generator attenuation = 10 dB, RBW = 1 kHz	
	100 kHz ≤ f < 300 kHz	typ. 70 dB
	300 kHz ≤ f < 6 GHz	> 70 dB, typ. 90 dB
	6 GHz ≤ f < 8 GHz	typ. > 50 dB
Dynamic range from port 2 to port 1	RF attenuation = 0 dB, tracking generator attenuation = 10 dB, RBW = 1 kHz	
	100 kHz ≤ f < 300 kHz	typ. 80 dB
	300 kHz ≤ f < 6 GHz	> 80 dB, typ. 100 dB
	6 GHz ≤ f < 8 GHz	typ. > 60 dB
Test port match		as specified for tracking generator output/RF input

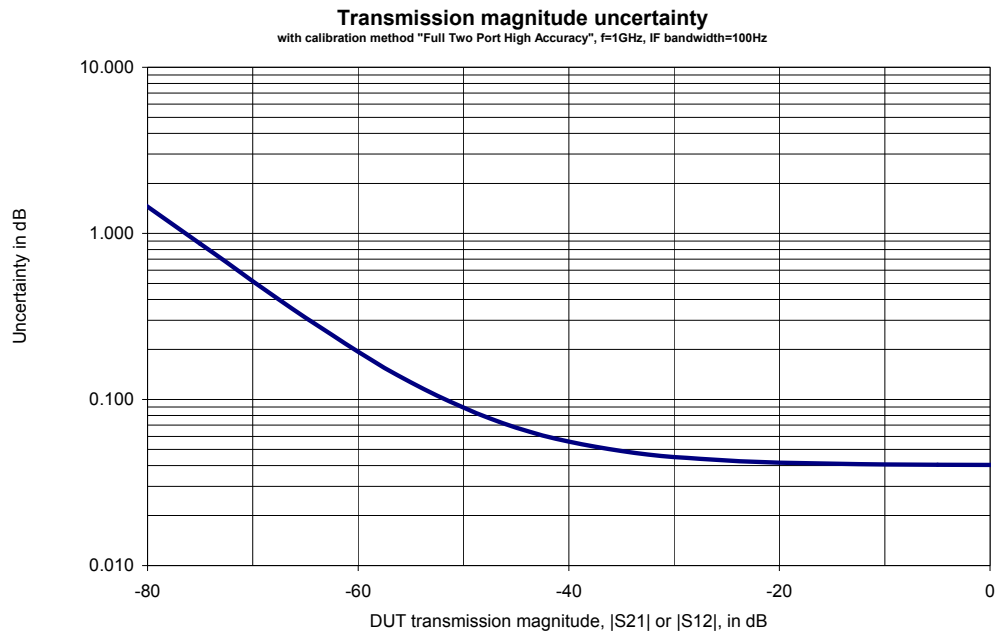


Transmission magnitude uncertainty.

Scalar network analysis

Model .24/.28 without R&S®FSH-K42 option

Frequency range	R&S®FSH4 model .24	300 kHz to 3.6 GHz
	R&S®FSH8 model .28	300 kHz to 8 GHz
Frequency resolution		1 Hz
Data points		631
Port power	controlled via tracking generator attenuation	nominal 0 dBm to -40 dBm in 1 dB steps
Reflection measurement		
Result formats		magnitude, VSWR, reflection coefficient
Return loss	range	1/2/5/10/20/50/100 dB, linear 100 %
	resolution	0.01 dB
VSWR	range	1 to 2, 6, 11, 21 or 71, selectable
Corrected directivity (20° to 30°)	300 kHz ≤ f ≤ 6 GHz	nominal > 25 dB
	6 GHz < f ≤ 8 GHz	nominal > 20 dB
Corrected test port match (20° to 30°)	300 kHz ≤ f ≤ 6 GHz	nominal > 20 dB
	6 GHz < f ≤ 8 GHz	nominal > 15 dB
Transmission measurement		
Result formats		magnitude
Dynamic range from port 1 to port 2	RF attenuation = 0 dB, tracking generator attenuation = 0 dB, RBW = 1 kHz	
	300 kHz ≤ f < 6 GHz	> 60 dB, typ. 80 dB
	6 GHz ≤ f < 8 GHz	typ. > 40 dB
Dynamic range from port 2 to port 1	RF attenuation = 0 dB, tracking generator attenuation = 0 dB, RBW = 1 kHz	
	300 kHz ≤ f < 6 GHz	> 70 dB, typ. 90 dB
	6 GHz ≤ f < 8 GHz	typ. > 50 dB
Test port match		as specified for tracking generator output/RF input

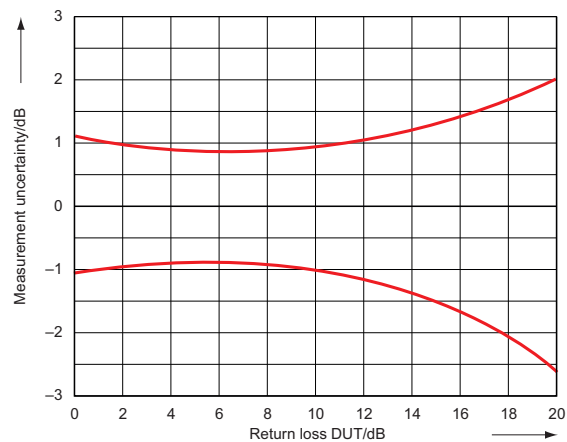

Uncertainty of reflection measurement without the R&S®FSH-K42 option.

Distance-to-fault analysis

Model .24/.28 with R&S® FSH-K41 option

Return loss	range	1/2/5/10/20/50/100 dB, linear 100 %
	resolution	0.01 dB
VSWR	range	1 to 1.1, 1.5, 2, 6, 11, 21 or 71
	resolution	0.01
Reflection coefficient		
mRho	range	1 to 1000 in 1, 2, 5 steps
Fault resolution in m		$(1.5 \times 10^8 \times \text{velocity factor}/\text{span})$
Maximum permissible spurious signal	RF attenuation = 0 dB	nominal 0 dBm
Input	selectable	RF port 1 or 2

R&S® FSH-K44 3GPP WCDMA BTS/NodeB pilot channel and pilot EVM measurement application

R&S® FSH-K44E 3GPP WCDMA BTS/NodeB code domain power and EVM measurement application with HSDPA/HSPA+ analyzer

The specifications below apply to the R&S®FSH4 and R&S®FSH8. They are based on the data sheet specifications of the R&S®FSH4 and R&S®FSH8, have not been checked separately and are not verified during instrument calibration. Measurement uncertainties are indicated as 95 % confidence intervals. The specified level measurement errors do not take into account systematic errors due to reduced signal-to-noise ratio (SNR).

Measurements	R&S®FSH-K44	R&S®FSH-K44E
Spectrum overview	●	●
Scrambling code search	●	●
Isotropic antenna	–	●
Result summary	●	●
RF channel power	●	●
Carrier frequency error	●	●
Active channels	● (2 channels)	●
Scrambling code found	●	●
Composite EVM	–	●
Peak code domain error	–	●
Average RCDE	–	●
I/Q offset	–	●
Gain imbalance	–	●
P-CPICH power	●	●
P-CPICH E_c/I_0	●	●
P-CPICH symbol EVM	●	●
Sync channel power	●	●
Code domain power	–	●
Code channel power	–	●
Code channel symbol rate	–	●
Channel power	–	●
EVM	–	●
Code domain channel table	–	●
Code channel type	–	●
Channel number/spreading factor	–	●
Code channel symbol rate	–	●
Timing offset	–	●
Pilot bits	–	●
Status	–	●
Power, absolute	–	●
Power, relative to CPICH	–	●
HSDPA channel support	–	●
HSPA+ channel support	–	●

Frequency range		15 MHz to 3.0 GHz
Carrier frequency uncertainty	test case 6.3 in line with 3GPP TS 25.141	
Lock range		±1 kHz
Measurement uncertainty	SNR > 30 dB, Δf_{ref} = uncertainty of reference frequency	< 10 Hz + Δf_{ref}
RF channel power	test case 6.2.1 in line with 3GPP TS 25.141, SNR > 30 dB, +15 °C to +35 °C	
Measurement range	frequency > 15 MHz	
	preamplifier = OFF	-60 dBm < $P_{RF\ channel}$ < 20 dBm
	preamplifier = ON	-80 dBm < $P_{RF\ channel}$ < 20 dBm
Measurement uncertainty	-80 dBm < $P_{RF\ channel}$ < 20 dBm, $P_{REF_LEV} - 30\ dB < P_{RF\ channel} < P_{REF_LEV} + 3\ dB$	1 dB, typ. 0.5 dB
CPICH power	test case 6.2.2 in line with 3GPP TS 25.141, SNR > 30 dB	
Measurement range	-40 dBm < $P_{RF\ channel}$ < 20 dBm	$P_{RF\ channel} - 20\ dB < P_{CPICH} < P_{RF\ channel}$
Measurement uncertainty	$P_{RF\ channel} - 20\ dBm < P_{CPICH} < P_{RF\ channel}$	1 dB, typ. 0.5 dB
P-CCPCH power	test model 2 in line with 3GPP TS 25.141, SNR > 30 dB	
Measurement range	-40 dBm < $P_{RF\ channel}$ < 20 dBm	$P_{RF\ channel} - 20\ dB < P_{P-CCPCH} < P_{RF\ channel}$
Measurement uncertainty	$P_{RF\ channel} - 20\ dBm < P_{P-CCPCH} < P_{RF\ channel}$	1 dB, typ. 0.5 dB
PSCH/SSCH power	test model 2 in line with 3GPP TS 25.141, SNR > 30 dB	
Measurement range	-40 dBm < $P_{RF\ channel}$ < 20 dBm	$P_{RF\ channel} - 20\ dB < P_{SCH} < P_{RF\ channel}$
Measurement uncertainty	$P_{RF\ channel} - 20\ dBm < P_{SCH} < P_{RF\ channel}$	2.5 dB, typ. 1.5 dB
Symbol EVM	SNR > 30 dB	
Measurement range	-40 dBm < $P_{RF\ channel}$ < 20 dBm single channel EVM	1.5 % < EVM < 25 %
Measurement uncertainty	1.5 % < EVM ≤ 10%	0.5 %
	10 % < EVM < 25 %	2.5 %
Residual EVM		typ. 1.5 %
Composite EVM ¹	test case 6.7.1 in line with 3GPP TS 25.141, test model 4 with P-CPICH, SNR > 30 dB	
Measurement range	-40 dBm < $P_{RF\ channel}$ < 20 dBm	1.5 % < EVM < 25 %
Measurement uncertainty	1.5 % < EVM ≤ 10%	typ. 2.0 %
	10 % < EVM < 25 %	typ. 2.5 %
Residual EVM		typ. 2.5 %
Scrambling code detection	test model 1.16 in line with 3GPP TS 25.141	
Lock range		±1 kHz
Calculation time		2.5 s
CPICH E_c/I_0		> -21 dB

¹ Requires instrument with serial number ≥ 105000.

R&S® FSH-K46 CDMA2000® BTS pilot channel and EVM measurement application

R&S® FSH-K46E CDMA2000® BTS code domain power measurement application

The specifications below apply to the R&S®FSH4 and R&S®FSH8. They are based on the data sheet specifications of the R&S®FSH4 and R&S®FSH8, have not been checked separately and are not verified during instrument calibration. Measurement uncertainties are indicated as 95 % confidence intervals. The specified level measurement errors do not take into account systematic errors due to reduced signal-to-noise ratio (SNR).

Measurements	R&S®FSH-K46	R&S®FSH-K46E
Spectrum overview	•	•
Result summary	•	•
RF channel power	•	•
Rho	•	•
Carrier frequency error	•	•
Active channels	•	•
Composite EVM	•	•
Peak to average	•	•
Pilot channel power (Cd 0)	•	•
Sync channel power (Cd 32)	•	•
Code domain power	–	•
RF channel power	–	•
Pilot power	–	•
Sync power (rel. to RF ch. pwr./pilot)	–	•
Code power (rel. to RF ch. pwr./pilot)	–	•
Carrier frequency error	–	•
Rho	–	•
Composite EVM	–	•
PN offset found	–	•
Code domain channel table	–	•
Channel type	–	•
Walsh code/spreading factor	–	•
Symbol rate (ksps)	–	•
RC	–	•
Status	–	•
Power absolute (dBm)	–	•
Power relative (rel. to RF ch. pwr./pilot)	–	•
PN scanner	–	•
Detected PN offset	–	•
Power per detected PN Offset	–	•

All specifications are valid for RC3, one traffic channel, SNR > 30 dB, +15 °C to +35 °C.

Frequency range		15 MHz to 3.0 GHz
Carrier frequency uncertainty, nominal values		
Lock range		±10 kHz
Measurement uncertainty	SNR > 30 dB, Δf_{ref} = uncertainty of reference frequency	< 10 Hz + Δf_{ref}
RF channel power		
Measurement range	frequency > 15 MHz preamplifier = OFF preamplifier = ON	–60 dBm < $P_{RF\ channel}$ < 20 dBm –75 dBm < $P_{RF\ channel}$ < 20 dBm
Measurement uncertainty	–75 dBm < $P_{RF\ channel}$ < 20 dBm, ref. level adjusted to RF channel power	< 1 dB, typ. 0.5 dB
PICH power		
Measurement range	SNR > 30 dB –40 dBm < $P_{RF\ channel}$ < 20 dBm	$P_{RF\ channel} - 20\ dB < P_{PICH} < P_{RF\ channel}$
Measurement uncertainty	$P_{RF\ channel} - 20\ dBm < P_{CPICH} < P_{RF\ channel}$	< 1 dB, typ. 0.5 dB
F-SYNC power		
Measurement range	SNR > 30 dB –40 dBm < $P_{RF\ channel}$ < 20 dBm	$P_{RF\ channel} - 20\ dB < P_{SYNC} < P_{RF\ channel}$
Measurement uncertainty	$P_{RF\ channel} - 20\ dBm < P_{SYNC} < P_{RF\ channel}$	< 1 dB, typ. 0.5 dB

Composite EVM	SNR > 30 dB	
Measurement range	$-40 \text{ dBm} < P_{\text{RF channel}} < 20 \text{ dBm}$	$1.5 \% < \text{EVM} < 25 \%$
Measurement uncertainty	$1.5 \% < \text{EVM} \leq 10\%$	typ. 2.0 %
	$10 \% < \text{EVM} < 25 \%$	typ. 2.5 %
Residual EVM		typ. 2.5 %
Rho	SNR > 30 dB	
Measurement range	$-40 \text{ dBm} < P_{\text{RF channel}} < 20 \text{ dBm}$	$0.9 < \text{Rho} < 1$
Measurement uncertainty	$0.97 < \text{Rho} \leq 1.0$	typ. 0.005
	$0.90 < \text{Rho} \leq 0.97$	typ. 0.02

R&S®FSH-K47 1xEV-DO® BTS pilot channel and EVM measurement application

The specifications below apply to the R&S®FSH4 and R&S®FSH8. They are based on the data sheet specifications of the R&S®FSH4 and R&S®FSH8, have not been checked separately and are not verified during instrument calibration. Measurement uncertainties are indicated as 95 % confidence intervals. The specified level measurement errors do not take into account systematic errors due to reduced signal-to-noise ratio (SNR).

Measurements	R&S®FSH-K47
Spectrum overview	•
Result summary	•
RF channel power	•
Pilot Rho	•
Carrier frequency error	•
Traffic activity	•
Pilot EVM	•
PN timing (tau)	•
Peak to average	•
Pilot power	•
MAC power	•
Data power	•

All specifications are valid for RC3, one traffic channel, SNR > 30 dB, +15 °C to +35 °C.

Frequency range		15 MHz to 3.0 GHz
Carrier frequency uncertainty, nominal values		
Lock range		±5 kHz
Measurement uncertainty	SNR > 30 dB, $\Delta f_{\text{ref}} = \text{uncertainty of reference frequency}$	$< 100 \text{ Hz} + \Delta f_{\text{ref}}$
RF channel power		
Measurement range	frequency > 15 MHz preamplifier = OFF	$-60 \text{ dBm} < P_{\text{RF channel}} < 20 \text{ dBm}$
	preamplifier = ON	$-75 \text{ dBm} < P_{\text{RF channel}} < 20 \text{ dBm}$
Measurement uncertainty	$-75 \text{ dBm} < P_{\text{RF channel}} < 20 \text{ dBm}$, ref. level adjusted to RF channel power	$< 1 \text{ dB}$, typ. 0.5 dB
Pilot power		
	SNR > 30 dB	
Measurement range	$-40 \text{ dBm} < P_{\text{RF channel}} < 20 \text{ dBm}$	$P_{\text{RF channel}} - 20 \text{ dB} < P_{\text{PICH}} < P_{\text{RF channel}}$
Measurement uncertainty	$P_{\text{RF channel}} - 20 \text{ dBm} < P_{\text{CPICH}} < P_{\text{RF channel}}$	$< 1 \text{ dB}$, typ. 0.5 dB
MAC power		
	SNR > 30 dB	
Measurement range	$-40 \text{ dBm} < P_{\text{RF channel}} < 20 \text{ dBm}$	$P_{\text{RF channel}} - 20 \text{ dB} < P_{\text{SYNC}} < P_{\text{RF channel}}$
Measurement uncertainty	$P_{\text{RF channel}} - 20 \text{ dBm} < P_{\text{SYNC}} < P_{\text{RF channel}}$	$< 1 \text{ dB}$, typ. 0.5 dB
Data power		
	SNR > 30 dB	
Measurement range	$-40 \text{ dBm} < P_{\text{RF channel}} < 20 \text{ dBm}$	$P_{\text{RF channel}} - 20 \text{ dB} < P_{\text{SYNC}} < P_{\text{RF channel}}$
Measurement uncertainty	$P_{\text{RF channel}} - 20 \text{ dBm} < P_{\text{SYNC}} < P_{\text{RF channel}}$	$< 1 \text{ dB}$, typ. 0.5 dB
Pilot EVM		
	SNR > 30 dB	
Measurement range	$-40 \text{ dBm} < P_{\text{RF channel}} < 20 \text{ dBm}$	$1.5 \% < \text{EVM} < 25 \%$
Measurement uncertainty	$1.5 \% < \text{EVM} \leq 10\%$	typ. 2.0 %
	$10 \% < \text{EVM} < 25 \%$	typ. 2.5 %
Residual EVM		typ. 2.5 %
Pilot Rho		
	SNR > 30 dB	
Measurement range	$-40 \text{ dBm} < P_{\text{RF channel}} < 20 \text{ dBm}$	$0.9 < \text{Rho} < 1$
Measurement uncertainty	$0.97 < \text{Rho} \leq 1.0$	typ. 0.005
	$0.90 < \text{Rho} \leq 0.97$	typ. 0.02

R&S®FSH-K50/R&S®FSH-K51 LTE FDD/TDD downlink pilot channel and EVM measurement application ²

R&S®FSH-K50E/R&S®FSH-K51E LTE FDD/TDD downlink extended channel and modulation measurement application ²

The specifications below apply to the R&S®FSH4 and R&S®FSH8. They are based on the data sheet specifications of the R&S®FSH4 and R&S®FSH8, have not been checked separately and are not verified during instrument calibration. Measurement uncertainties are indicated as 95 % confidence intervals. The specified level measurement errors do not take into account systematic errors due to reduced signal-to-noise ratio (S/N).

Measurements	R&S®FSH-K50/R&S®FSH-K51	R&S®FSH-K50E/R&S®FSH-K51E
Spectrum overview	•	•
Result summary	•	•
RF channel power	•	•
Carrier frequency error	•	•
I/Q offset	•	•
Cell identity	•	•
Cyclic prefix	•	•
Reference signal power	•	•
PSYNC power	•	•
SSYNC power	•	•
PBCH power	•	•
PCFICH power	•	•
PDSCH power	•	•
Reference signal EVM	•	•
PSYNC EVM	•	•
SSYNC EVM	•	•
PBCH EVM	•	•
PCFICH EVM	•	•
PDSCH EVM	•	•
Constellation diagram	–	•
PSYNC	–	•
SSYNC	–	•
QPSK	–	•
16QAM	–	•
64QAM	–	•
BTS scanner	–	•
Cell identity	–	•
PSYNC power	–	•
SSYNC power	–	•

All specifications are valid for SNR > 30 dB, +15 °C to +35 °C.

Frequency range		15 MHz to 3.0 GHz
Supported channel bandwidths		1.4/3/5/10/15/20 MHz
Carrier frequency uncertainty		
Lock range		±10 kHz
Measurement uncertainty	SNR > 30 dB, Δf_{ref} = uncertainty of reference frequency	< 10 Hz + Δf_{ref}
RF channel power		
Measurement range	frequency > 15 MHz preamplifier = OFF	–60 dBm < $P_{RF\ channel}$ < 20 dBm
	preamplifier = ON	–75 dBm < $P_{RF\ channel}$ < 20 dBm
Measurement uncertainty	–75 dBm < $P_{RF\ channel}$ < 20 dBm, ref. level adjusted to RF channel power	< 1 dB, typ. 0.5 dB
EVM		
Measurement range	–50 dBm < $P_{RF\ channel}$ < 10 dBm, 860 MHz < frequency < 2.69 GHz, E-UTRA test model 3.1, bandwidth 10 MHz, reference signal and PDSCH	
Residual EVM		< 2.5 %, typ. 2.0 %

² R&S®FSH-K50/R&S®FSH-K51/R&S®FSH-K50E/R&S®FSH-K51E options require instruments with serial number ≥ 105000.

General data

Manual operation		
Languages		Chinese, English, French, German, Italian, Hungarian, Japanese, Korean, Portuguese, Russian, Spanish
Remote control (R&S®FSH-K40 option)		
Command set		SCPI 1997.0
LAN interface		10/100BaseT, RJ-45
USB		mini B plug, version 1.1
Display		
Resolution		640 × 480 pixel
Audio		
Speaker		internal
USB interface		
	serial number ≥ 105000	type A plug, version 1.1
Mass memory		
Mass memory		flash memory (internal), SD card (not supplied), size ≤ 4 Gbyte
	serial number ≥ 105000	memory stick (not supplied), size ≤ 4 Gbyte, USB version 1.1 or 2.0
Data storage	internal	> 256 instrument settings and traces
	on SD card/memory stick, ≥ 1 Gbyte	> 5000 instrument settings and traces
Temperature		
	operating temperature range	0 °C to +50 °C
	permissible temperature range	-10 °C to +55 °C
	storage temperature range	-40 °C to +70 °C
	battery charging mode	0 °C to +40 °C
Climatic loading	relative humidity	+25/+40 °C at 85 % relative humidity (EN 60068-2-30)
	IP class of protection	51
	with R&S®HA-Z222 carrying holster and rain cap	54
Mechanical resistance		
Vibration	sinusoidal	EN 60068-2-6
	random	EN 60068-2-64
Shock		40 g shock spectrum, in line with MIL-STD-810F, method 516.4 procedure 1, EN 60068-2-27

Power supply		
R&S®HA-Z201 plug-in AC power supply	input specifications	100 V to 240 V AC, 50 Hz to 60 Hz, 700 mA
	output specifications	15 V DC, 2 A
	operating temperature range	0 °C to +40 °C
	storage temperature range	-40 °C to +70 °C
	test mark	VDE, CE, UL, PSE
External DC voltage		14 V to 16 V
Internal battery		Li-ion battery
Capacity	R&S®HA-Z204 (standard)	4.5 Ah
	R&S®HA-Z206 (option)	6.75 Ah
Voltage		nominal 7.2 V
Operating time with new, fully charged battery	R&S®HA-Z204 (standard)	3 h
	R&S®HA-Z206 (option)	4.5 h
Charging time	instrument switched OFF or R&S®HA-Z203 battery charger	
	R&S®HA-Z204 (standard)	2.5 h
	R&S®HA-Z206 (option)	3.5 h
	instrument switched ON	
	R&S®HA-Z204 (standard)	3.5 h
	R&S®HA-Z206 (option)	4.5 h
Life time	charging cycles	> 500
Power consumption		typ. 12 W
Safety		IEC 61010-1, EN 61010-1, UL 61010B-1, CSA C22.2 No. 1010-1
Test mark		VDE, GS, CSA, CSA-NRTL
EMC	in line with European EMC Directive 2004/108/EC including	
	EN 61326 class B (emission)	
	CISPR 11/EN 55011/group 1 class B (emission)	
	EN 61326 table A.1 (immunity, industrial) field strength: 30 V/m	
Dimensions (W × H × D)	with handle	194 mm × 300 mm × 144 mm (7.6 in × 11.8 in × 5.7 in)
	without handle	194 mm × 300 mm × 69 mm (7.6 in × 11.8 in × 2.7 in)
Weight		< 3 kg (< 6.6 lb)
Recommended calibration interval		1 year

Accessories

R&S®FSH-Z1 and R&S®FSH-Z18 power sensors


Frequency range	R&S®FSH-Z1	10 MHz to 8 GHz
	R&S®FSH-Z18	10 MHz to 18 GHz
VSWR	10 MHz to 30 MHz	< 1.15
	30 MHz to 2.4 GHz	< 1.13
	2.4 GHz to 8 GHz	< 1.20
	8 GHz to 18 GHz	< 1.25
Maximum input power	average power	400 mW (+26 dBm)
	peak power (< 10 µs, 1 % duty cycle)	1 W (+30 dBm)
Measurement range		200 pW to 200 mW (-67 dBm to +23 dBm)
Signal weighting		average power
Effect of harmonics		< 0.5 % (0.02 dB) at harmonic ratio of 20 dB
Effect of modulation		< 1.5 % (0.07 dB) for continuous digital modulation
Absolute measurement uncertainty	sine signals, no zero offset	
	10 MHz to 8 GHz	+15 °C to +35 °C 0 °C to +50 °C
8 GHz to 18 GHz	+15 °C to +35 °C	< 3.5 % (0.15 dB)
	0 °C to +50 °C	< 5.0 % (0.21 dB)
Zero offset after zeroing		< 110 pW
Dimensions (W × H × D)		48 mm × 31 mm × 170 mm (1.9 in × 1.22 in × 6.7 in)
	connecting cable	1.5 m (59 in)
Weight		< 0.3 kg (0.66 lb)

R&S®FSH-Z14 directional power sensor


Frequency range		25 MHz to 1 GHz
Power measurement range		30 mW to 300 W
VSWR referenced to 50 Ω		< 1.06
Power-handling capacity	depending on temperature and matching (see diagram on page 19)	100 W to 1000 W
Insertion loss		< 0.06 dB
Directivity		> 30 dB
Average power		
Power measurement range		
CW, FM, PM, FSK, GMSK	CF: ratio of peak envelope	30 mW to 300 W
Modulated signals	power to average power	30 mW to 300 W/CF
Measurement uncertainty		
25 MHz to 40 MHz	sine signal	4.0 % of measured value (0.17 dB)
40 MHz to 1 GHz	+18 °C to +28 °C, no zero offset	3.2 % of measured value (0.14 dB)
Zero offset	after zeroing	±4 mW
Range of typical measurement error with modulation	FM, PM, FSK, GMSK	0 % of measured value (0 dB)
	AM (80 %)	±3 % of measured value (±0.13 dB)
	two CW carriers with identical power	±2 % of measured value (±0.09 dB)
	EDGE, TETRA	±0.5 % of measured value (±0.02 dB) ³
Temperature coefficient	25 MHz to 40 MHz	0.40 %/K (0.017 dB/K)
	40 MHz to 1 GHz	0.25 %/K (0.011 dB/K)

³ If standard is selected on the R&S®FSH4/R&S®FSH8.

Max. peak envelope power		
Power measurement range		
Video bandwidth	4 kHz	0.4 W to 300 W
	200 kHz	1 W to 300 W
	600 kHz	2 W to 300 W
Measurement uncertainty	same as for average power plus effect of peak hold circuit	+18 °C to +28 °C
Error limits of peak hold circuit for burst signals		
Duty cycle ≥ 0.1 and repetition rate $\geq 100/s$	video bandwidth 4 kHz	$\pm(3\%$ of measured value + 0.05 W) starting from a burst width of 200 μ s
	video bandwidth 200 kHz	$\pm(3\%$ of measured value + 0.20 W) starting from a burst width of 4 μ s
	video bandwidth 600 kHz	$\pm(7\%$ of measured value + 0.40 W) starting from a burst width of 2 μ s
$20/s \leq$ repetition rate $< 100/s$		plus $\pm(1.6\%$ of measured value + 0.15 W)
$0.001 \leq$ duty cycle < 0.1		plus ± 0.10 W
Temperature coefficient	25 MHz to 40 MHz	0.50 %/K (0.022 dB/K)
	40 MHz to 1 GHz	0.35 %/K (0.015 dB/K)
Load matching		
Matching measurement range		
Return loss		0 dB to 23 dB
VSWR		> 1.15
Minimum forward power	specifications complied with ≥ 0.4 W	0.06 W
Dimensions (W \times H \times D)		120 mm \times 95 mm \times 39 mm (4.72 in \times 3.74 in \times 1.53 in)
	connecting cable	1.5 m (59 in)
Weight		0.65 kg (1.43 lb)

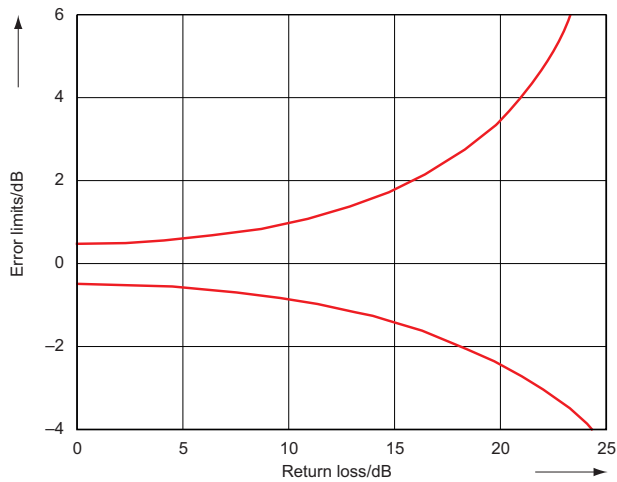

Error limits for matching measurements.

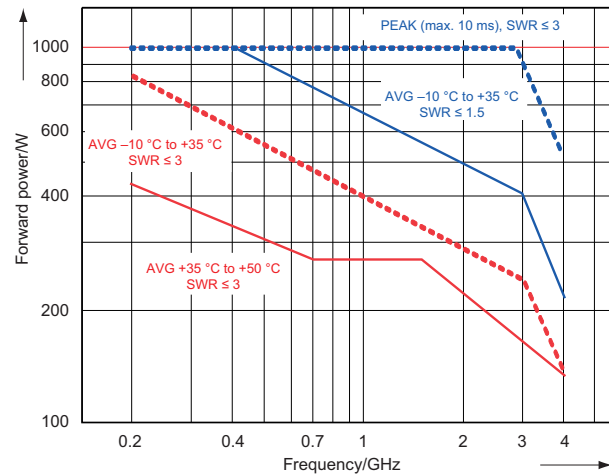


Power-handling capacity.

R&S® FSH-Z44 directional power sensor


Frequency range		200 MHz to 4 GHz	
Power measurement range		30 mW to 300 W	
VSWR referenced to 50 Ω	200 MHz to 3 GHz	< 1.07	
	3 GHz to 4 GHz	< 1.12	
Power-handling capacity	depending on temperature and matching (see diagram on page 21)	120 W to 1000 W	
Insertion loss	200 MHz to 1.5 GHz	< 0.06 dB	
	1.5 GHz to 4 GHz	< 0.09 dB	
Directivity	200 MHz to 3 GHz	> 30 dB	
	3 GHz to 4 GHz	> 26 dB	
Average power			
Power measurement range	CF: ratio of peak envelope power to average power		
	CW, FM, PM, FSK, GMSK	30 mW to 300 W	
	3GPP WCDMA, cdmaOne, CDMA2000®, DAB, DVB-T	30 mW to 120 W	
	other modulated signals	30 mW to 300 W/CF	
Measurement uncertainty	sine signal, +18 °C to +28 °C, no zero offset		
	200 MHz to 300 MHz	4.0 % of measured value (0.17 dB)	
	300 MHz to 4 GHz	3.2 % of measured value (0.14 dB)	
Zero offset	after zeroing	±4 mW	
Range of typical measurement error with modulation	FM, PM, FSK, GMSK	0 % of measured value (0 dB)	
	AM (80 %)	±3 % of measured value (±0.13 dB)	
	two CW carriers with identical power	±2 % of measured value (±0.09 dB)	
	π/4-DQPSK	±2 % of measured value (±0.09 dB)	
	EDGE	±0.5 % of measured value (±0.02 dB) ⁴	
	cdmaOne, DAB	±1 % of measured value (±0.04 dB) ⁴	
	3GPP WCDMA, CDMA2000®, DVB-T	±2 % of measured value (±0.09 dB) ⁴	
Temperature coefficient	200 MHz to 300 MHz	0.40 %/K (0.017 dB/K)	
	300 MHz to 4 GHz	0.25 %/K (0.011 dB/K)	
Max. peak envelope power			
Power measurement range	DAB, DVB-T, cdmaOne, CDMA2000®, 3GPP WCDMA		
		4 W to 300 W	
	Other signals at video bandwidth	4 kHz	0.4 W to 300 W
		200 kHz	1 W to 300 W
4 MHz		2 W to 300 W	
Measurement uncertainty	+18 °C to +28 °C	same as for average power plus effect of peak hold circuit	
Error limits of peak hold circuit for burst signals	duty cycle ≥ 0.1 and repetition rate ≥ 100/s		
	video bandwidth 4 kHz	±(3 % of measured value + 0.05 W) starting from a burst width of 100 μs	
	video bandwidth 200 kHz	±(3 % of measured value + 0.20 W) starting from a burst width of 4 μs	
	video bandwidth 4 MHz	±(7 % of measured value + 0.40 W) starting from a burst width of 1 μs	
	20/s ≤ repetition rate < 100/s	plus ±(1.6 % of measured value + 0.15 W)	
	0.001 ≤ duty cycle < 0.1	plus ±0.10 W	
	burst width ≥ 0.5 μs	plus ±5 % of measured value	
burst width ≥ 0.2 μs	plus ±10 % of measured value		
Range of typical measurement error of peak hold circuit	video bandwidth 4 MHz and standard selected on the R&S®FSH4/R&S®FSH8		
	cdmaOne, DAB	±(5 % of measured value + 0.4 W)	
	DVB-T, CDMA2000®, 3GPP WCDMA	±(15 % of measured value + 0.4 W)	
Temperature coefficient	200 MHz to 300 MHz	0.50 %/K (0.022 dB/K)	
	300 MHz to 4 GHz	0.35 %/K (0.015 dB/K)	

⁴ If standard is selected on the R&S®FSH4/R&S®FSH8.

Load matching		
Matching measurement range		
Return loss	200 MHz to 3 GHz	0 dB to +23 dB
VSWR	3 GHz to 4 GHz	0 dB to +20 dB
VSWR	200 MHz to 3 GHz	> 1.15
	3 GHz to 4 GHz	> 1.22
Minimum forward power	specifications complied with ≥ 0.2 W	0.03 W
Dimensions (W × H × D)		120 mm × 95 mm × 39 mm (4.72 in × 3.74 in × 1.53 in)
	connecting cable	1.5 m (59 in)
Weight		0.65 kg (1.43 lb)

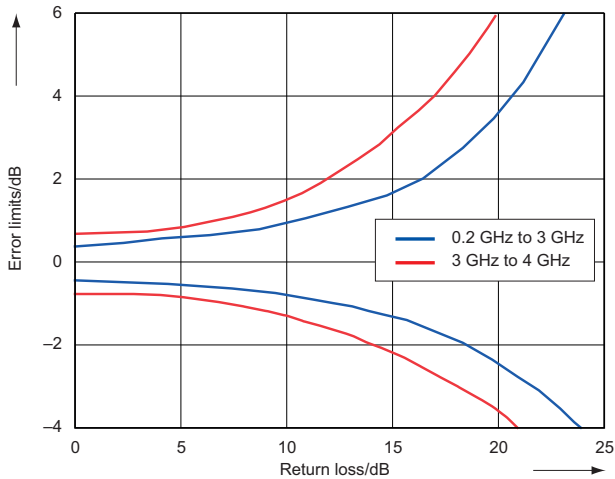

Error limits for matching measurements.

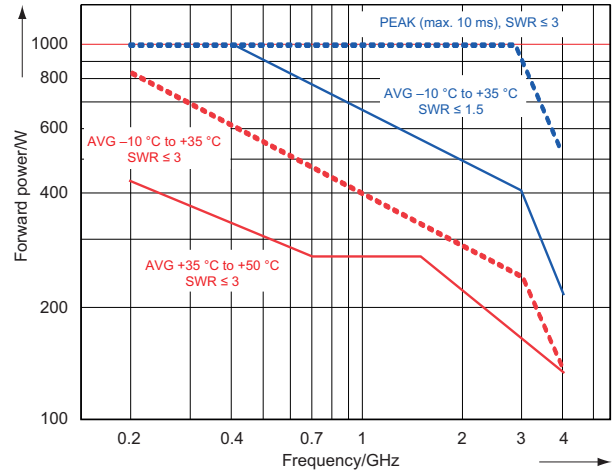

Power-handling capacity.

R&S® HA-Z240 GPS receiver

GPS location indication		latitude, longitude
Reference frequency uncertainty	GPS ON, ≥ 1 minute after satellite lock	$\pm 2.5 \times 10^{-8}$
	up to 30 minutes after losing satellite lock	$\pm 5 \times 10^{-8}$
Temperature	operating temperature range	-20 °C to +55 °C
	storage temperature range	-40 °C to +70 °C
Climatic loading	GPS receiver module	IEC 60529 IPX7 level
Connector		7-contact male (type Binder 712)
Power consumption		0.45 W
Test marks		FCC, CE
Dimensions	diameter × height	$\varnothing 61$ mm × 19.5 mm ($\varnothing 2.4$ in × 0.8 in)
	cable length	5 m (16.4 ft)
Weight		200 g (0.4 lb)

Ordering information

Designation	Type	Order No.
Spectrum Analyzer, 9 kHz to 3.6 GHz, with preamplifier	R&S®FSH4	1309.6000.04
Spectrum Analyzer, 9 kHz to 3.6 GHz, with preamplifier and tracking generator	R&S®FSH4	1309.6000.14
Spectrum Analyzer, 100 kHz to 3.6 GHz, with preamplifier, tracking generator and internal VSWR bridge	R&S®FSH4	1309.6000.24
Spectrum Analyzer, 9 kHz to 8 GHz, with preamplifier	R&S®FSH8	1309.6000.08
Spectrum Analyzer, 9 kHz to 8 GHz, with preamplifier and tracking generator	R&S®FSH8	1309.6000.18
Spectrum Analyzer, 100 kHz to 8 GHz, with preamplifier, tracking generator and internal VSWR bridge	R&S®FSH8	1309.6000.28
Accessories supplied		
Li-ion battery pack, USB cable, LAN cable, AC power supply, CD-ROM with R&S®FSH4View software and documentation, quick start guide, SD card reader for PC		

Options

Designation	Type	Order No.	Remarks
Spectrogram Measurement Application	R&S®FSH-K14	1304.5770.02	
Remote Control via LAN or USB	R&S®FSH-K40	1304.5606.02	
Distance-to-Fault Analysis (for models .24 and .28 only, requires R&S®FSH-Z320 or R&S®FSH-Z321 and R&S®FSH-Z28 or R&S®FSH-Z29)	R&S®FSH-K41	1304.5612.02	
Vector Network Analysis (for models .24 and .28 only)	R&S®FSH-K42	1304.5629.02	
Vector Voltmeter (for models .24 and .28 only)	R&S®FSH-K45	1304.5658.02	
3GPP WCDMA BTS/NodeB Pilot Channel and EVM Measurement Application	R&S®FSH-K44	1304.5641.02	
3GPP WCDMA BTS/NodeB Code Domain Power and EVM Measurement Application	R&S®FSH-K44E	1304.5758.02	
CDMA2000® BTS Pilot Channel and EVM Measurement Application	R&S®FSH-K46	1304.5729.02	
CDMA2000® BTS Code Domain Power Measurement Application (R&S®FSH-K46 required)	R&S®FSH-K46E	1304.5764.02	
1xEV-DO® BTS Pilot Channel and EVM Measurement Application	R&S®FSH-K47	1304.5787.02	
LTE FDD Downlink Pilot Channel and EVM Measurement Application	R&S®FSH-K50	1304.5735.02	only for instruments with serial number ≥ 105000
LTE TDD Downlink Pilot Channel and EVM Measurement Application	R&S®FSH-K51	1304.5812.02	only for instruments with serial number ≥ 105000
LTE FDD Downlink Extended Channel and Modulation Measurement Application (R&S®FSH-K50 required)	R&S®FSH-K50E	1304.5793.02	only for instruments with serial number ≥ 105000
LTE TDD Downlink Extended Channel and Modulation Measurement Application (R&S®FSH-K51 required)	R&S®FSH-K51E	1304.5829.02	only for instruments with serial number ≥ 105000

Accessories

Designation	Type	Order No.
Power Sensor, 10 MHz to 8 GHz	R&S®FSH-Z1	1155.4505.02
Power Sensor, 10 MHz to 18 GHz	R&S®FSH-Z18	1165.1909.02
Directional Power Sensor, 25 MHz to 1 GHz	R&S®FSH-Z14	1120.6001.02
Directional Power Sensor, 200 MHz to 4 GHz	R&S®FSH-Z44	1165.2305.02
USB Adapter Cable for R&S®FSH-Z1/R&S®FSH-Z18 (for connection to a PC)	R&S®FSH-Z101	1164.6242.02
USB Adapter Cable for R&S®FSH-Z44 (for connection to a PC)	R&S®FSH-Z144	1145.5909.02
RF Cable (length 1 m), DC to 8 GHz, armored, N male/N female connectors	R&S®FSH-Z320	1309.6600.00
RF Cable (length 3 m), DC to 8 GHz, armored, N male/N female connectors	R&S®FSH-Z321	1309.6617.00
Combined Open/Short/50 Ω Load Calibration Standard, DC to 3.6 GHz	R&S®FSH-Z29	1300.7510.03
Combined Open/Short/50 Ω Load Calibration Standard, DC to 8 GHz	R&S®FSH-Z28	1300.7810.03
Combined Open/Short/50 Ω Load/Through Calibration Standard, DC to 8 GHz, N male	R&S®ZV-Z121	1164.0496.02
Combined Open/Short/50 Ω Load/Through Calibration Standard, DC to 8 GHz, N female	R&S®ZV-Z121	1164.0496.03
Combined Open/Short/50 Ω Load/Through Calibration Standard, DC to 13 GHz, PC3.5 male	R&S®ZV-Z132	1164.1092.02
Combined Open/Short/50 Ω Load/Through Calibration Standard, DC to 13 GHz, PC3.5 female	R&S®ZV-Z132	1164.1092.03
Matching Pad 50/75 Ω, L section	R&S®RAM	0358.5414.02
Matching Pad 50/75 Ω, series resistor 25 Ω	R&S®RAZ	0358.5714.02
Matching Pad 50/75 Ω, L section, N to BNC	R&S®FSH-Z38	1300.7740.02
Li-Ion Battery Pack, 4.5 Ah	R&S®HA-Z204	1309.6130.00
Li-Ion Battery Pack, 6.75 Ah	R&S®HA-Z206	1309.6146.00
Battery Charger for R&S®HA-Z204 and R&S®HA-Z206 Li-ion battery pack ⁵	R&S®HA-Z203	1309.6123.00
12 V Car Adapter for cigarette lighter ⁶	R&S®HA-Z202	1309.6117.00
Soft Carrying Bag	R&S®HA-Z220	1309.6175.00
Hard Case	R&S®HA-Z221	1309.6181.00
Carrying Holster, including chest harness and rain cover	R&S®HA-Z222	1309.6198.00
SD Memory Card, 2 Gbyte ⁷	R&S®HA-Z232	1309.6223.00
Headphones	R&S®FSH-Z36	1145.5838.02
Active Directional Antenna, 20 MHz to 7.5 GHz	R&S®HE300	4067.5900.02
Loop Antenna for R&S®HE300, 9 kHz to 20 MHz	R&S®HE300HF	4067.6806.02
Near-Field Probe Set	R&S®HZ-15	1147.2736.02
Preamplifier for R&S®HZ-15	R&S®HZ-16	1147.2720.02
Spare USB Cable	R&S®HA-Z211	1309.6169.00
Spare Ethernet Cable	R&S®HA-Z210	1309.6152.00
Spare Power Supply, incl. mains plug for EU, GB, US	R&S®HA-Z201	1309.6100.00
GPS Receiver	R&S®HA-Z240	1309.6700.03
Spare CD-ROM including R&S®FSH4View Software and Operating Manual for R&S®FSH4/R&S®FSH8	R&S®FSH-Z45	1309.6246.00
Spare printed Quick Start Guide for R&S®FSH4/R&S®FSH8, English	R&S®FSH-Z46	1309.6269.12
Spare printed Quick Start Guide for R&S®FSH4/R&S®FSH8, German	R&S®FSH-Z47	1309.6269.11
Portable system for EMVU measurements		
Hard Case	R&S®TS-EMF	1158.9295.05
Isotropic Antenna, 30 MHz to 3 GHz for R&S®TS-EMF	R&S®TSEMF-B1	1074.5719.02
Isotropic Antenna, 700 MHz to 6 GHz for R&S®TS-EMF	R&S®TSEMF-B2	1074.5702.02
Isotropic Antenna, 9 kHz to 200 MHz for R&S®TS-EMF	R&S®TSEMF-B3	1074.5690.02

⁵ Note: The battery charger is dedicated for charging an additional battery outside the instrument. The internal battery is charged by the instrument itself.

⁶ Note: The car adapter is suitable for both the instrument and the R&S®HA-Z203 external battery charger.

⁷ Note: Firmware update is installed from SD memory card.

R&S® NRP-Zxx power sensors supported by the R&S® FSH4/R&S® FSH8^{8 9}

Designation	Type	Order No.
Power Sensor, 10 MHz to 8 GHz	R&S®FSH-Z1	1155.4505.02
Power Sensor, 10 MHz to 18 GHz	R&S®FSH-Z18	1165.1909.02
Directional Power Sensor, 25 MHz to 1 GHz	R&S®FSH-Z14	1120.6001.02
Directional Power Sensor, 200 MHz to 4 GHz	R&S®FSH-Z44	1165.2305.02
Universal Power Sensor, 10 MHz to 8 GHz, 200 mW	R&S®NRP-Z11	1138.3004.02
Universal Power Sensor, 10 MHz to 18 GHz, 200 mW	R&S®NRP-Z21	1137.6000.02
Universal Power Sensor, 10 MHz to 18 GHz, 2 W	R&S®NRP-Z22	1137.7506.02
Universal Power Sensor, 10 MHz to 18 GHz, 15 W	R&S®NRP-Z23	1137.8002.02
Universal Power Sensor, 10 MHz to 18 GHz, 30 W	R&S®NRP-Z24	1137.8502.02
Universal Power Sensor, 10 MHz to 33 GHz, 200 mW	R&S®NRP-Z31	1169.2400.02
Thermal Power Sensor, 0 Hz to 18 GHz, 100 mW	R&S®NRP-Z51	1138.0005.02
Thermal Power Sensor, 0 Hz to 40 GHz, 100 mW	R&S®NRP-Z55	1138.2008.02
Thermal Power Sensor, 0 Hz to 50 GHz, 100 mW	R&S®NRP-Z56	1171.8201.02
Thermal Power Sensor, 0 Hz to 67 GHz, 100 mW	R&S®NRP-Z57	1171.8401.02
Wideband Power Sensor, 50 MHz to 18 GHz, 100 mW	R&S®NRP-Z81	1137.9009.02
Average Power Sensor, 9 kHz to 6 GHz, 200 mW	R&S®NRP-Z91	1168.8004.02
Average Power Sensor, 9 kHz to 6 GHz, 2 W	R&S®NRP-Z92	1171.7005.02

R&S®NRP-Zxx power sensors require the following adapter cable for operation on the R&S®ZVH:

Passive USB adapter to connect R&S®NRP-Zxx sensors to the R&S®ZVH	R&S®NRP-Z4	1146.8001.02
---	------------	--------------

R&S®FSH power sensors require the following adapter cable for connection to a PC:

USB Adapter Cable for R&S®FSH-Z1/R&S®FSH-Z18	R&S®FSH-Z101	1164.6252.02
USB Adapter Cable for R&S®FSH-Z44	R&S®FSH-Z144	1145.5905.02

Service options

Two-Year Calibration Service	R&S®CO2FSH	Please contact your local Rohde & Schwarz sales office.
Three-Year Calibration Service	R&S®CO3FSH	
Five-Year Calibration Service	R&S®CO5FSH	
One-Year Repair Service following the warranty period	R&S®RO2FSH	
Two-Year Repair Service following the warranty period	R&S®RO3FSH	
Four-Year Repair Service following the warranty period	R&S®RO5FSH	

CDMA2000® is a registered trademark of the Telecommunications Industry Association (TIA-USA).

For product brochure, see PD 5214.0482.12 and www.rohde-schwarz.com.

⁸ For average power measurements only.

⁹ R&S®NRP-Zxx power sensors are supported by instruments with serial number ≥ 105000 .

Service you can rely on

- ▮ Worldwide
- ▮ Local and personalized
- ▮ Customized and flexible
- ▮ Uncompromising quality
- ▮ Long-term dependability

About Rohde & Schwarz

Rohde & Schwarz is an independent group of companies specializing in electronics. It is a leading supplier of solutions in the fields of test and measurement, broadcasting, radiomonitoring and radiolocation, as well as secure communications. Established more than 75 years ago, Rohde & Schwarz has a global presence and a dedicated service network in over 70 countries. Company headquarters are in Munich, Germany.

Environmental commitment

- ▮ Energy-efficient products
- ▮ Continuous improvement in environmental sustainability
- ▮ ISO 14001-certified environmental management system

Certified Quality System
ISO 9001

Rohde & Schwarz GmbH & Co. KG

www.rohde-schwarz.com

Regional contact

- ▮ Europe, Africa, Middle East
+49 89 4129 123 45
customersupport@rohde-schwarz.com
- ▮ North America
1 888 TEST RSA (1 888 837 87 72)
customer.support@rsa.rohde-schwarz.com
- ▮ Latin America
+1 410 910 79 88
customersupport.la@rohde-schwarz.com
- ▮ Asia/Pacific
+65 65 13 04 88
customersupport.asia@rohde-schwarz.com

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG
Trade names are trademarks of the owners | Printed in Germany (ch)
PD 5214.0482.22 | Version 08.00 | June 2011 | R&S®FSH4/R&S®FSH8
Subject to change

© 2008 - 2011 Rohde & Schwarz GmbH & Co. KG | 81671 München, Germany



5214048222