





MEASUREMENT PROBES AND FEEDS

Closed Boundary Quad-Ridge Horns



SOLUTION FOR

- Gain reference for medium/high gain antennas
- Wideband probes for far-field test ranges
- Illumination of reflector antennas
- Quasi-monostatic radar cross section (RCS) measurements

MAIN FEATURES

Technical performance

- Smooth gain with frequency
- Dual linear polarization with high polarization purity and isolation
- Low return loss / VSWR
- Wide bandwidth

Design

- Well-defined smooth radiation pattern throughout the operational bandwidth
- Minimum number of coupled parts to maximize mechanical accuracy
- Lightweight for easy handling

Surface treatment

- Surtec 650 according to MIL-C 5541E class 3
- Polyurethane paint

Repeatability

- Stiff and robust mechanical design
- Standard MVG circular interface for precision centering
- Precision pins for accurate polarization alignment
- Precision machined
- High reliability coaxial connectors

Delivered documents

- Typical performance data (TYMEDA™)
- Measured return loss data and port-to-port coupling

PRODUCT CONFIGURATION

Equipment

- Mounting flange
- Integrated coaxial transition with high precision connector
- Circular polarization available with external hybrid coupler


Related services

- Calibration and maintenance
- Customization


Electrical characteristics

Part number	QR500	QR800	QR2000	QR6000	QR18000
Type of antenna	Closed boundary quad-ridge horn	Closed boundary quad-ridge horn	Closed boundary quad-ridge horn	Closed boundary quad-ridge horn	Closed boundary quad-ridge horn
Frequency range	0.5 – 3.8 GHz	0.8 – 6 GHz	2 – 18 GHz	6 – 18 GHz	10 – 40 GHz
Polarization	Dual linear	Dual linear	Dual linear	Dual linear	Dual linear
Gain	4 – 16 dBi	4 – 16 dBi	7 – 21 dBi	9 – 15 dBi	10 – 19 dBi
VSWR	< 1.9	< 1.9	< 1.9	< 1.9	< 1.9
Return loss	< -10 dB	< -10 dB	< -10 dB	< -10 dB	< -10 dB
Port to port isolation	> 40 dB	> 40 dB	> 30 dB	> 40 dB	> 35 dB
Cross-polar discrimination	> 30 dB	> 30 dB	> 25 dB	> 30 dB	> 30 dB
Impedance	50 Ohms	50 Ohms	50 Ohms	50 Ohms	50 Ohms


Boresight realized gain

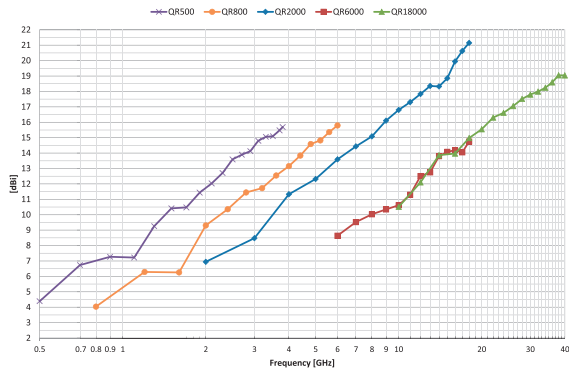


QR500 radiation pattern

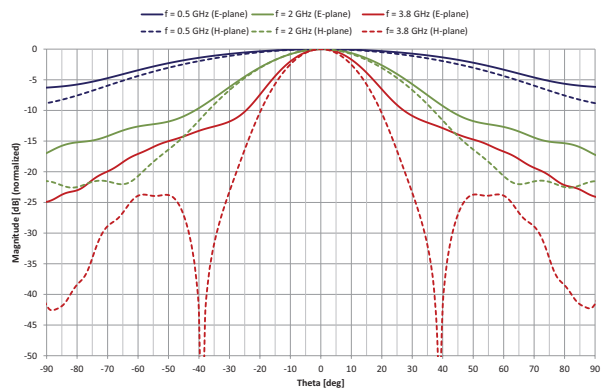


QR800 radiation pattern

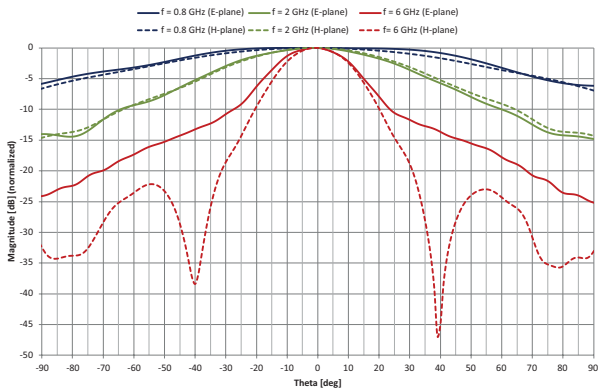


QR2000 radiation pattern

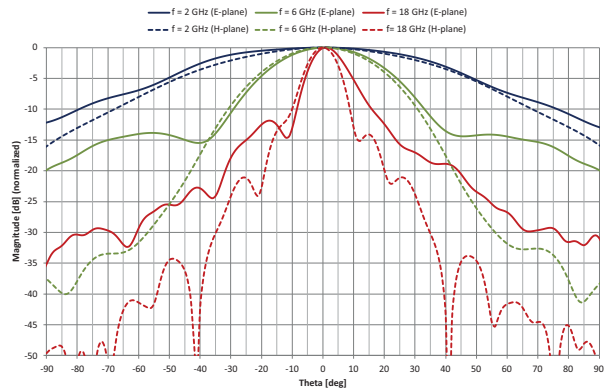

QR6000 radiation pattern

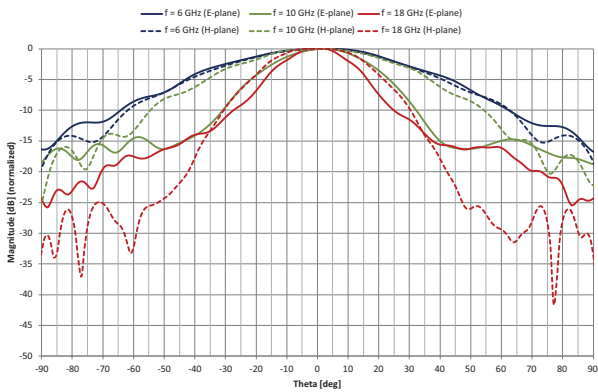

QR18000 radiation pattern

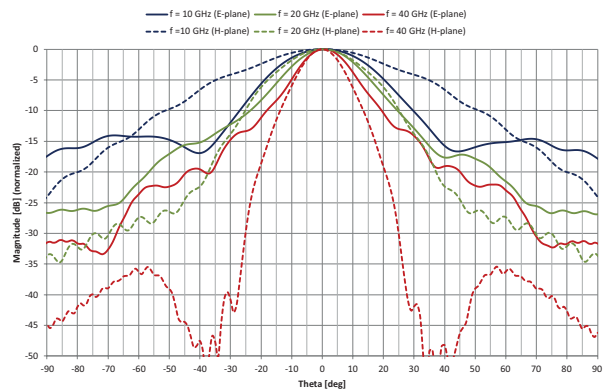




Mechanical characteristics

Part number	QR500	QR800	QR2000	QR6000	QR18000
Dimensions [mm] (H x W x L)	311.1 x 311.1 x 476.7	194.5 x 194.5 x 302.4	125 x 125 x 257.4	47 x 47 x 151	48 x 48 x 134.7
Weight (approx.)	7 Kg	2.3 Kg	1.3 Kg	0.25 Kg	0.2 Kg
RF connector	3.5 mm Female ⁽¹⁾	3.5 mm Female ⁽¹⁾	3.5 mm Female ⁽¹⁾	3.5 mm Female ⁽¹⁾	2.92 mm Female ⁽²⁾
Material	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Treatment	Surtec 650 ⁽³⁾	Surtec 650 ⁽³⁾	Surtec 650 ⁽³⁾	Surtec 650 ⁽³⁾	Surtec 650 ⁽³⁾
Interface	Circular Ø 110 mm	Circular Ø 110 mm	Circular Ø 60 mm	Circular Ø 60 mm	Circular Ø 60 mm

(1) Huber & Suhner type 23 PC35-50-0-51/199 UE

(2) SWMI type 1012-16SF

(3) According to MIL-C 5541E class 3

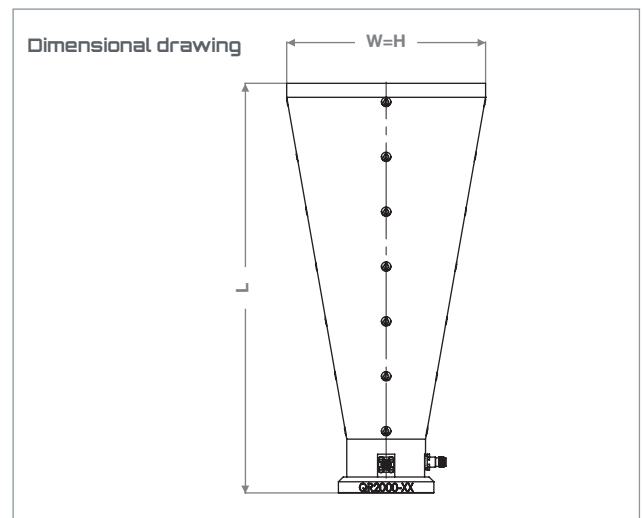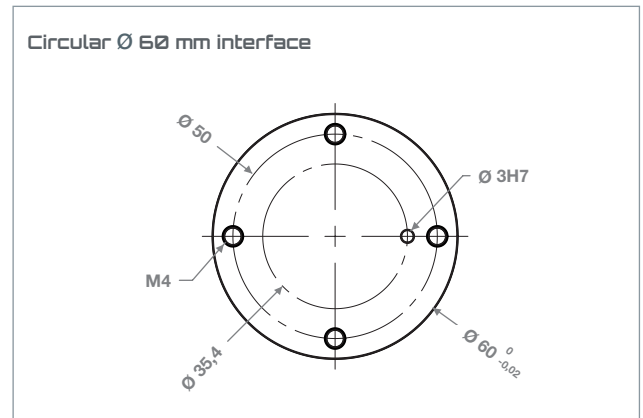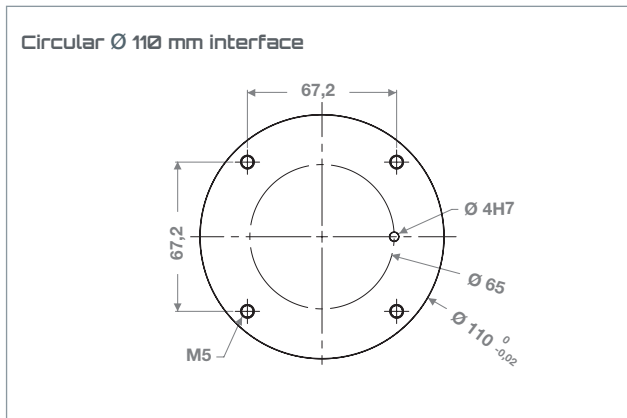

MVG - Testing Connectivity for a Wireless World

The Microwave Vision Group offers cutting-edge technologies for the visualization of electromagnetic waves. Enhancing the speed and accuracy of wireless connectivity testing, as well as the performance and reliability of anechoic and EMC technologies, our systems are integral to meeting the testing challenges of a fully connected world.



WORLDWIDE GROUP, LOCAL SUPPORT

Our teams, in offices around the world, guide and support you from purchase, through design, to delivery and installation. Because we are local, we can assure speed and attention in project follow through. This includes customer support and maintenance once the system is in place.

For the exact addresses and up-to-date contact information:

www.mvg-world.com/mvg-offices



For more information:
www.mvg-world.com

Contact us:
www.mvg-world.com/en/contact

