



# N9038A MXE EMI Receiver

3 Hz to 3.6, 8.4, 26.5, and 44 GHz



## Table of Contents

Definitions and Conditions .....	3
Frequency and Time Specifications .....	4
Amplitude Accuracy and Range Specifications.....	7
Dynamic Range Specifications.....	11
PowerSuite Measurement Specifications .....	16
General Specifications.....	17
Input and Outputs.....	19
I/Q Analyzer .....	21
RTSA .....	23

### Keep the test queue flowing

In EMC testing, success depends on tools that can help you do more in less time—today and tomorrow. That's why Keysight Technologies, Inc. created the MXE: it's a standards-compliant EMI receiver and diagnostic signal analyzer built on an upgradeable platform. In the lab and on the bench, it provides the accuracy, repeatability, and reliability you need to test with confidence. Equip your team with the MXE, and keep the test queue flowing.

## Definitions and Conditions

Specifications describe the performance of parameters covered by the product warranty and apply to the full temperature range of 0 to 55 °C, unless otherwise noted.

95th percentile values indicate the breadth of the population (approx.  $2\sigma$ ) of performance tolerances expected to be met in 95 percent of the cases with a 95 percent confidence, for any ambient temperature in the range of 20 to 30 °C. In addition to the statistical observations of a sample of instruments, these values include the effects of the uncertainties of external calibration references. These values are not warranted. These values are updated occasionally if a significant change in the statistically observed behavior of production instruments is observed.

Typical describes additional product performance information that is not covered by the product warranty. It is performance beyond specifications that 80 percent of the units exhibit with a 95 percent confidence level over the temperature range 20 to 30 °C. Typical performance does not include measurement uncertainty.

Nominal values indicate expected performance, or describe product performance that is useful in the application of the product, but are not covered by the product warranty.

The receiver will meet its specifications when:

- It is within its calibration cycle
- Under auto couple control, except when Auto Sweep Time Rules = Accy
- Signal frequencies < 10 MHz, with DC coupling applied
- The receiver has been stored at an ambient temperature within the allowed operating range for at least two hours before being turned on
- The receiver has been turned on at least 30 minutes with Auto Align set to normal, or, if Auto Align is set to off or partial, alignments must have been run recently enough to prevent an Alert message; if the Alert condition is changed from "Time and Temperature" to one of the disabled duration choices, the receiver may fail to meet specifications without informing the user

This data sheet is a summary of the specifications and conditions for the MXE EMI receiver. For the complete specifications guide, visit:

[www.keysight.com/find/mxe\\_specifications](http://www.keysight.com/find/mxe_specifications)

### Get more information

This data sheet is a summary of the specifications and conditions which are available in the MXE EMI Receiver Specification Guide (N9038-90010).

For ordering information, refer to the MXE EMI Receiver Configuration Guide (5990-7419EN).

## Frequency and Time Specifications

Frequency range	DC coupled	AC coupled
Input 1		
– Option 5034	3 Hz to 3.6 GHz	10 MHz to 3.6 GHz
– Option 508	3 Hz to 8.4 GHz	10 MHz to 8.4 GHz
– Option 526	3 Hz to 26.5 GHz	10 MHz to 26.5 GHz
– Option 544	3 Hz to 44 GHz	–
Input 2	3 Hz to 1 GHz	10 MHz to 1 GHz
Band	LO multiple (N)	
0	1	3 Hz to 3.6 GHz
1	1	3.5 to 8.4 GHz
2	2	8.3 to 13.6 GHz
3	2	13.5 to 17.1 GHz
4	4	17.0 to 26.5 GHz
5	4	26.4 to 34.5 GHz
6	8	34.4 to 44 GHz
Frequency reference		
Accuracy	± [(time since last adjustment x aging rate) + temperature stability + calibration accuracy]	
Total aging	± 1 x 10 <sup>-7</sup> / year	
	± 1.5 x 10 <sup>-7</sup> / 2 years	
Temperature stability		
– 20 to 30 °C	± 1.5 x 10 <sup>-8</sup>	
– Full temperature range	± 5 x 10 <sup>-8</sup>	
Achievable initial calibration accuracy	± 4 x 10 <sup>-8</sup>	
Residual FM	≤ (0.25 Hz x N) p-p in 20 ms (nominal)	
Frequency readout accuracy (start, stop, center, marker)		
± (marker frequency x frequency reference accuracy + 0.25 % x span + 5 % x RBW + 2 Hz + 0.5 x horizontal resolution <sup>1</sup> )		
Marker frequency counter		
Accuracy	± (marker frequency x frequency reference accuracy + 0.100 Hz)	
Delta counter accuracy	± (delta frequency x frequency reference accuracy + 0.141 Hz)	
Counter resolution	0.001 Hz	
Frequency span (FFT and swept mode)		
Range	0 Hz (zero span), 10 Hz to maximum frequency of instrument	
Resolution	2 Hz	
Accuracy		
– Stepped/Swept	± (0.25 % x span + horizontal resolution)	
– FFT	± (0.1% x span + horizontal resolution)	

1. Horizontal resolution is span/(sweep points – 1).

<b>Sweep time and triggering</b>			
Range	Span = 0 Hz	1 $\mu$ s to 6000 s	
	Span $\geq$ 10 Hz	1 ms to 4000 s	
Accuracy	Span $\geq$ 10 Hz, swept	$\pm$ 0.01 % (nominal)	
	Span $\geq$ 10 Hz, FFT	$\pm$ 40 % (nominal)	
	Span = 0 Hz	$\pm$ 0.01 % (nominal)	
Trigger	Free run, line, video, external 1, external 2, RF burst, periodic timer		
Trigger delay	Span = 0 Hz or FFT	-150 to +500 ms	
	Span $\geq$ 10 Hz, swept	0 $\mu$ s to 500 ms	
	Resolution	0.1 $\mu$ s	
<b>Time gating</b>			
Gate methods	Gated LO; gated video; gated FFT		
Gate length range (except method = FFT)	100.0 ns to 5.0 s		
Gate delay range	0 to 100.0 s		
Gate delay jitter	33.3 ns p-p (nominal)		
<b>Sweep (trace) point range</b>			
All spans	1 to 100,001		
<b>Resolution bandwidth (RBW)</b>			
EMI bandwidths (CISPR compliant)	200 Hz, 9 kHz, 120 kHz, 1 MHz		
EMI bandwidths (Mil STD 461 compliant)	10 Hz, 100 Hz, 1 kHz, 10 kHz, 100 kHz, 1 MHz		
Other bandwidths (-6 dB)	30 Hz, 300 Hz, 3 kHz, 30 kHz, 300 kHz, 3 MHz, 10 MHz		
Range (-3.01 dB bandwidth)	1 Hz to 3 MHz (10 % steps, E24 series, 24 per decade), 4, 5, 6, 8 MHz		
Bandwidth accuracy (power)	1 Hz to 750 kHz	$\pm$ 1.0 % ( $\pm$ 0.044 dB)	
	820 kHz to 1.2 MHz (< 3.6 GHz CF)	$\pm$ 2.0 % ( $\pm$ 0.088 dB)	
	1.3 to 2 MHz (< 3.6 GHz CF)	$\pm$ 0.07 dB (nominal)	
	2.2 to 3 MHz (< 3.6 GHz CF)	$\pm$ 0.15 dB (nominal)	
	4 to 8 MHz (< 3.6 GHz CF)	$\pm$ 0.25 dB (nominal)	
Bandwidth accuracy (-3.01 dB)	1 Hz to 1.3 MHz	$\pm$ 2 % (nominal)	
Selectivity (-60 dB/-3 dB)	4.1:1 (nominal)		
<b>RF preselector filters</b>	<b>Filter band</b>	<b>Filter type</b>	<b>6 dB BW (nominal)</b>
	20 Hz to 150 kHz	Fixed lowpass	310 kHz
	150 kHz to 1 MHz	Fixed bandpass	1.7 MHz
	1 to 2 MHz	Fixed bandpass	2.4 MHz
	2 to 5 MHz	Fixed bandpass	7.5 MHz
	5 to 8 MHz	Fixed bandpass	10 MHz
	8 to 11 MHz	Fixed bandpass	9.5 MHz
	11 to 14 MHz	Fixed bandpass	9.5 MHz
	14 to 17 MHz	Fixed bandpass	10 MHz
	17 to 20 MHz	Fixed bandpass	9.5 MHz
	20 to 24 MHz	Fixed bandpass	9.5 MHz
	24 to 30 MHz	Fixed bandpass	9.0 MHz
	30 to 70 MHz	Tracking bandpass	10 MHz
	70 to 150 MHz	Tracking bandpass	24 MHz
	150 to 300 MHz	Tracking bandpass	28 MHz
	300 to 600 MHz	Tracking bandpass	50 MHz
	600 MHz to 1 GHz	Tracking bandpass	60 MHz
	1 to 2 GHz	Tracking bandpass	180 MHz
	2 to 3.6 GHz	Fixed highpass	1.89 GHz (-3 dB corner frequency)

<b>Analysis bandwidth <sup>1</sup></b>		
Maximum bandwidth	Option B25	25 MHz
	Standard	10 MHz
<b>Video bandwidth (VBW)</b>		
Range	1 Hz to 3 MHz (10 % steps, E24 series 24 per decade), 4, 5, 6, 8 MHz, and wide open (labeled 50 MHz)	
Accuracy	± 6 % (nominal)	
<b>Measurement speed <sup>2</sup></b>		
	<b>Standard</b>	
Local measurement and display update rate	4 ms (250/s) (nominal)	
Remote measurement and LAN transfer rate	5 ms (200/s) (nominal)	
Marker peak search	1.5 ms (nominal)	
Center frequency tune and transfer (RF)	20 ms (nominal)	
Center frequency tune and transfer ( $\mu$ W)	47 ms (nominal)	
Measurement/mode switching	39 ms (nominal)	
<b>Time domain sweep times</b>		
CISPR band B, 150 kHz to 30 MHz, RBW = 9 kHz, measurement time = 100 ms, peak detector	12.1 s (nominal)	
CISPR band B, 150 kHz to 30 MHz, RBW = 9 kHz, measurement time = 1 s, quasi-peak detector	181.7 s (nominal)	
CISPR band C/D, 30 MHz to 1 GHz, RBW = 120 kHz, measurement time = 10 ms, peak detector	3.1 s (nominal)	
CISPR band C/D, 30 MHz to 1 GHz, RBW = 9 kHz, measurement time = 10 ms, peak detector	18.1 s (nominal)	
CISPR band C/D, 30 MHz to 1 GHz, RBW = 120 kHz, measurement time = 1 s, quasi-peak detector	211.5 s (nominal)	

1. Analysis bandwidth is the instantaneous bandwidth available around a center frequency over which the input signal can be digitized for further analysis or processing in the time, frequency, or modulation domain.
2. Sweep points = 101.

# Amplitude Accuracy and Range Specifications

Amplitude range				
Measurement range	Displayed average noise level (DANL) to maximum safe input level			
Input attenuator range	0 to 70 dB in 2 dB steps			
Maximum safe input level (with and without preamp)				
	RF Input 1	RF Input 2		
Average total power	+30 dBm (1 W)	+30 dBm (1 W)		
Peak pulse power	+45 dBm (31.6 W)	+50 dBm (100 W)	< 10 $\mu$ s pulse width, < 1 % duty cycle and input attenuation $\geq$ 30 dB	
Surge power	+2k W		(10 $\mu$ s pulse width)	
DC volts				
– DC coupled	$\pm$ 0.2 Vdc	$\pm$ 0.2 Vdc		
– AC coupled	$\pm$ 100 Vdc	$\pm$ 100 Vdc		
Display range				
Log scale	0.1 to 1 dB/division in 0.1 dB steps 1 to 20 dB/division in 1 dB steps (10 display divisions)			
Linear scale	10 divisions			
Scale units	dBm, dBmV, dB $\mu$ V, dBmA, dB $\mu$ A, V, W, A dBuV/m, dBuA/m, dBpT, dBG, dBpW			
Frequency response	Specification		95th percentile ( $\approx$ 2 $\sigma$ )	
	Option 503, 508, or 526 (RF/ $\mu$ W)	Option 544 (mmW)	Option 503, 508, or 526 (RF/ $\mu$ W)	Option 544 (mmW)
(10 dB input attenuation, 20 to 30 °C, preselector centering applied, $\sigma$ = nominal standard deviation)				
RF preselector off, preamp off	3 Hz to 20 Hz		$\pm$ 0.25 dB (nominal)	$\pm$ 0.25 dB (nominal)
	20 Hz to 10 MHz <sup>1</sup>	$\pm$ 0.6 dB	$\pm$ 0.22 dB	$\pm$ 0.25 dB
	10 to 50 MHz	$\pm$ 0.65 dB	$\pm$ 0.22 dB	$\pm$ 0.21 dB
	50 MHz to 3.6 GHz	$\pm$ 0.65 dB	$\pm$ 0.22 dB	$\pm$ 0.15 dB
	3.5 to 5.2 GHz	$\pm$ 1.5 dB	$\pm$ 0.47 dB	$\pm$ 0.6 dB
	5.2 to 8.4 GHz	$\pm$ 1.5 dB	$\pm$ 0.47 dB	$\pm$ 0.57 dB
	8.3 to 13.6 GHz	$\pm$ 1.5 dB	$\pm$ 0.46 dB	$\pm$ 0.54 dB
	13.5 to 17.1 GHz	$\pm$ 1.5 dB	$\pm$ 0.53 dB	$\pm$ 0.64 dB
	17 to 18 GHz	$\pm$ 1.5 dB	$\pm$ 0.57 dB	$\pm$ 0.72 dB
	18 to 22 GHz	$\pm$ 1.7 dB	$\pm$ 0.64 dB	$\pm$ 0.72 dB
	22 to 26.5 GHz	$\pm$ 1.7 dB	$\pm$ 0.61 dB	$\pm$ 0.71 dB
	26.4 to 34.5 GHz			$\pm$ 0.93 dB
	34.4 to 44 GHz			$\pm$ 1.24 dB
RF preselector off, preamp on (0 dB attenuation)	100 kHz to 3.6 GHz <sup>1</sup>	$\pm$ 0.75 dB	$\pm$ 0.29 dB	
	100 kHz to 10 MHz			$\pm$ 0.43 dB
	10 to 50 MHz			$\pm$ 0.29 dB
	50 MHz to 3.6 GHz			$\pm$ 0.31 dB
	3.5 to 8.4 GHz	$\pm$ 1.85 dB	$\pm$ 0.63 dB	
	3.5 to 5.2 GHz			$\pm$ 0.9 dB
	5.2 to 8.4 GHz			$\pm$ 0.7 dB
	8.3 to 13.6 GHz	$\pm$ 1.95 dB	$\pm$ 0.64 dB	$\pm$ 0.79 dB
	13.5 to 17.1 GHz	$\pm$ 1.8 dB	$\pm$ 0.81 dB	$\pm$ 0.88 dB
	17 to 18 GHz	$\pm$ 2.0 dB	$\pm$ 0.95 dB	
	18 to 22 GHz	$\pm$ 2.85 dB	$\pm$ 1.23 dB	
	17 to 22 GHz			$\pm$ 1.07 dB
	22 to 26.5 GHz	$\pm$ 2.6 dB	$\pm$ 1.37 dB	$\pm$ 1.03 dB
	26.4 to 34.5 GHz			$\pm$ 1.35 dB
	34.4 to 44 GHz			$\pm$ 1.69 dB

- DC coupling required to meet specifications below 50 MHz. With AC coupling, specifications apply at frequencies of 50 MHz and higher. Statistical observations at 10 MHz with AC coupling show that most instruments meet the DC-coupled specifications, however, a small percentage of instruments are expected to have errors exceeding 0.5 dB at 10 MHz at the temperature extreme. The effect at 20 to 50 MHz is negligible but not warranted.

Frequency response (Continued)	Specification		95th percentile ( $\approx 2\sigma$ )	
	Option 503, 508, or 526 (RF/ $\mu$ W)	Option 544 (mmW)	Option 503, 508, or 526 (RF/ $\mu$ W)	Option 544 (mmW)
RF preselector on, preamp off	3 Hz to 20 Hz		$\pm 0.3$ dB (nominal)	$\pm 0.3$ dB (nominal)
	20 Hz to 300 MHz <sup>1</sup>	$\pm 0.65$ dB	$\pm 0.30$ dB	$\pm 0.3$ dB
	300 MHz to 1 GHz	$\pm 0.65$ dB	$\pm 0.28$ dB	$\pm 0.28$ dB
	1 to 3.6 GHz	$\pm 0.85$ dB	$\pm 0.36$ dB	$\pm 0.36$ dB
	3.5 to 8.4 GHz	$\pm 1.5$ dB	$\pm 0.47$ dB	
	3.5 to 5.2 GHz			$\pm 0.6$ dB
	5.2 to 8.4 GHz		$\pm 1.6$ dB	$\pm 0.57$ dB
	8.3 to 13.6 GHz	$\pm 1.5$ dB	$\pm 1.5$ dB	$\pm 0.46$ dB
	13.5 to 17.1 GHz	$\pm 1.5$ dB	$\pm 1.5$ dB	$\pm 0.53$ dB
	17 to 18 GHz	$\pm 1.5$ dB	$\pm 1.7$ dB	$\pm 0.57$ dB
	18 to 22 GHz	$\pm 1.7$ dB	$\pm 1.7$ dB	$\pm 0.64$ dB
	22 to 26.5 GHz	$\pm 1.7$ dB	$\pm 1.7$ dB	$\pm 0.61$ dB
	26.4 to 34.5 GHz		$\pm 2.5$ dB	$\pm 0.93$ dB
	34.4 to 44 GHz		$\pm 3.2$ dB	$\pm 1.24$ dB
RF preselector on, preamp on (0 dB attenuation)	1 kHz to 30 MHz <sup>1</sup>	$\pm 0.8$ dB	$\pm 0.36$ dB	$\pm 0.36$ dB
	30 to 300 MHz <sup>1</sup>	$\pm 0.7$ dB	$\pm 0.29$ dB	$\pm 0.29$ dB
	300 MHz to 1 GHz	$\pm 0.65$ dB	$\pm 0.30$ dB	$\pm 0.30$ dB
	1 to 2.75 GHz	$\pm 0.95$ dB	$\pm 0.45$ dB	$\pm 0.45$ dB
	2.75 to 3.6 GHz	$\pm 1.15$ dB	$\pm 1.15$ dB	$\pm 0.55$ dB
	3.5 to 8.4 GHz	$\pm 1.85$ dB	$\pm 0.63$ dB	
	3.5 to 5.2 GHz			$\pm 0.9$ dB
	5.2 to 8.4 GHz		$\pm 2.2$ dB	$\pm 0.7$ dB
	8.3 to 13.6 GHz	$\pm 1.95$ dB	$\pm 1.85$ dB	$\pm 0.64$ dB
	13.5 to 17.1 GHz	$\pm 1.8$ dB	$\pm 1.95$ dB	$\pm 0.81$ dB
	17 to 18 GHz	$\pm 2.0$ dB	$\pm 1.8$ dB	$\pm 0.95$ dB
	18 to 22 GHz	$\pm 2.85$ dB	$\pm 2.85$ dB	$\pm 1.23$ dB
	22 to 26.5 GHz	$\pm 2.6$ dB	$\pm 2.6$ dB	$\pm 1.37$ dB
	26.4 to 34.5 GHz		$\pm 3.0$ dB	$\pm 1.03$ dB
34.4 to 44 GHz		$\pm 4.1$ dB	$\pm 1.35$ dB	
			$\pm 1.69$ dB	

1. DC coupling required to meet specifications below 50 MHz. With AC coupling, specifications apply at frequencies of 50 MHz and higher. Statistical observations at 10 MHz with AC coupling show that most instruments meet the DC-coupled specifications, however, a small percentage of instruments are expected to have errors exceeding 0.5 dB at 10 MHz at the temperature extreme. The effect at 20 to 50 MHz is negligible but not warranted.

Input attenuation switching uncertainty		Specifications	
Attenuation > 2 dB, preamp off	50 MHz (reference frequency)	$\pm 0.20$ dB	$\pm 0.08$ dB (typical)
Relative to 10 dB (reference setting)			
Absolute amplitude accuracy		Specifications	
(10 dB attenuation, 20 to 30 °C, 1 Hz $\leq$ RBW $\leq$ 1 MHz, input signal -10 to -50 dBm, all settings auto-coupled except Auto Swp Time = Accy, any reference level, any scale, $\sigma$ = nominal standard deviation)			
RF preselector off and on, preamp off and on			
RF input 1 to 44 GHz	At 50 MHz	$\pm 0.33$ dB	$\pm 0.25$ dB
	At all frequencies	$\pm (0.33 \text{ dB} + \text{frequency response})$	
RF input 2 to 1 GHz	At 50 MHz	$\pm 0.36$ dB	$\pm 0.27$ dB
	At all frequencies	$\pm (0.36 \text{ dB} + \text{frequency response})$	



Input voltage standing wave ratio (VSWR)		Input attenuation 0 dB	Input attenuation $\geq 10$ dB
<b>RF preselector off, preamp on and off</b>			
DC coupled	1 to 18 GHz	3.0:1	2.0:1
	18 to 26.5 GHz	3.0:1	2.0:1
	26.5 to 40 GHz	3.0:1	2.5:1
	40 to 44 GHz	–	–
AC coupled	1 to 18 GHz	3.0:1	2.0:1
	18 to 26.5 GHz	3.0:1	2.4:1
<b>RF preselector on, preamp on and off</b>			
DC coupled	9 kHz to 1 GHz	2.0:1	1.2:1
	1 to 26.5 GHz	3.0:1	2.0:1
	26.5 to 40 GHz	3.0:1	2.5:1
	40 to 44 GHz	–	–
AC coupled	50 MHz to 1 GHz	2.0:1	1.2:1
	1 to 18 GHz	3.0:1	2.0:1
	18 to 26.5 GHz	3.0:1	2.4:1
<b>Resolution bandwidth switching uncertainty (referenced to 30 kHz RBW)</b>			
1 Hz to 1.5 MHz RBW	$\pm 0.05$ dB		
1.6 to 3 MHz RBW	$\pm 0.10$ dB		
4, 5, 6, 8 MHz RBW	$\pm 1.0$ dB		
<b>Reference level</b>			
Range			
– Log scale	–170 to +30 dBm in 0.01 dB steps		
– Linear scale	Same as log (707 pV to 7.07 V)		
Accuracy	0 dB		
<b>Display scale switching uncertainty</b>			
Switching between linear and log	0 dB		
Log scale/div switching	0 dB		
<b>Display scale fidelity</b>			
Between –10 dBm and –80 dBm input mixer level	$\pm 0.10$ dB total		
<b>Total measurement uncertainty <sup>1</sup></b>		<b>95th percentile (<math>\approx 2\sigma</math>)</b>	
<b>Signal level 0 to 90 dB below reference point, RF attenuation 0 to 40 dB, RBW <math>\leq 3</math> MHz, 20° to 30° C: AC coupled 10 MHz to 26.5 GHz</b>			
<b>DC coupled 9 kHz to 40 GHz</b>			
		Option 503, 508, or 526 (RF/ $\mu$ W)	Option 544 (mmW)
RF preselector off, preamp off	1 kHz to 2 GHz	$\pm 0.50$ dB	$\pm 0.50$ dB
	2 to 3.6 GHz	$\pm 0.60$ dB	$\pm 0.60$ dB
	3.6 to 8 GHz	$\pm 0.80$ dB	$\pm 1.70$ dB
	8 to 18 GHz	$\pm 1.10$ dB	$\pm 1.30$ dB
	18 to 26.5 GHz	$\pm 1.60$ dB	$\pm 1.60$ dB
	26.5 to 40 GHz		$\pm 1.70$ dB
	40 to 44 GHz		$\pm 2.30$ dB
RF preselector off, preamp on	100 kHz to 2 GHz	$\pm 0.60$ dB	$\pm 0.60$ dB
	2 to 3.6 GHz	$\pm 0.60$ dB	$\pm 0.60$ dB
	3.6 to 8 GHz	$\pm 1.10$ dB	$\pm 1.80$ dB
	8 to 18 GHz	$\pm 1.30$ dB	$\pm 1.30$ dB
	18 to 26.5 GHz	$\pm 1.90$ dB	$\pm 1.90$ dB
	26.5 to 40 GHz		$\pm 1.90$ dB
	40 to 44 GHz		$\pm 2.40$ dB

1. Specified for instruments with prefixes MY/SG5322 or greater.

<b>Total measurement uncertainty <sup>1</sup></b>		<b>95th percentile (<math>\approx 2\sigma</math>)</b>	
<b>(Continued)</b>			
RF preselector on, preamp off	9 kHz to 2 GHz	$\pm 0.50$ dB	$\pm 0.50$ dB
	2 to 3.6 GHz	$\pm 0.50$ dB	$\pm 0.50$ dB
	3.6 to 8 GHz	$\pm 0.80$ dB	$\pm 1.70$ dB
	8 to 18 GHz	$\pm 1.10$ dB	$\pm 1.30$ dB
	18 to 26.5 GHz	$\pm 1.60$ dB	$\pm 1.60$ dB
	26.5 to 40 GHz		$\pm 1.70$ dB
	40 to 44 GHz		$\pm 2.30$ dB
RF preselector on, preamp on	9 kHz to 2 GHz	$\pm 0.50$ dB	$\pm 0.50$ dB
	2 to 3.6 GHz	$\pm 0.70$ dB	$\pm 0.70$ dB
	3.6 to 8 GHz	$\pm 1.10$ dB	$\pm 1.80$ dB
	8 to 18 GHz	$\pm 1.30$ dB	$\pm 1.30$ dB
	18 to 26.5 GHz	$\pm 1.90$ dB	$\pm 1.90$ dB
	26.5 to 40 GHz		$\pm 1.90$ dB
	40 to 44 GHz		$\pm 2.40$ dB

### Trace detectors

Normal, peak, sample, negative peak, log power average, RMS average, and voltage average

CISPR detectors: quasi-peak, EMI-avg, RMS-avg

### Preamplifier

<b>Gain</b>			
– RF preselector off	100 kHz to 3.6 GHz	+20 dB (nominal)	
	3.6 to 26.5 GHz	+35 dB (nominal)	
	26.5 to 44 GHz	+40 dB (nominal)	
– RF preselector on	9 kHz to 3.6 GHz	+20 dB (nominal)	
	3.6 to 26.5 GHz	+35 dB (nominal)	
	26.5 to 44 GHz	+40 dB (nominal)	

### Amplitude probability distribution

Dynamic range	> 70 dB
Amplitude accuracy	< $\pm 2.7$ dB
Maximum measureable time period (no dead time)	2 minutes
Minimum measureable probability	$10^{-7}$
Amplitude level assignment	1000 levels
Sampling rate	$\geq 10$ MSa/s (within a 1 MHz RBW)
Amplitude resolution	0.1881 dB

1. Specified for instruments with prefixes MY/SG5322 or greater.

## Dynamic Range Specifications

1 dB gain compression		Specification		Typical	
		Maximum power at mixer			
	Frequency range	Option 503, 508, or 526 (RF/μW)	Option 544 (mmW)	Option 503, 508, or 526 (RF/μW)	Option 544 (mmW)
<b>RF Input 1 to 44 GHz (RF Input 2 to 1 GHz, performance = RF Input 1 performance + 9 dB)</b>					
RF preselector on and off, preamp off	9 kHz to 10 MHz			+4 dBm (nominal)	+4 dBm (nominal)
	10 to 500 MHz	0 dBm	0 dBm	+3 dBm (typical)	+3 dBm (typical)
	500 MHz to 3.6 GHz	+1 dBm	+1 dBm	+5 dBm (typical)	+5 dBm (typical)
	3.6 to 26.5 GHz	0 dBm	0 dBm	+4 dBm (typical)	+4 dBm (typical)
	26.4 to 44 GHz		-1 dBm		+2 dBm (nominal)
RF preselector off, preamp on	10 MHz to 3.6 GHz			-13 dBm (nominal)	-13 dBm (nominal)
	3.6 to 26.5 GHz				
	Tone spacing 100 kHz to 20 MHz			-26 dBm (nominal)	-30 dBm (nominal)
	Tone spacing > 70 MHz			-16 dBm (nominal)	-16 dBm (nominal)
	26.4 to 44 GHz				-30 dBm (nominal)
RF preselector on, preamp on	9 kHz to 10 MHz			-16 dBm (nominal)	-16 dBm (nominal)
	10 to 2 GHz			-18 dBm (typical)	-21 dBm (typical)
	2 GHz to 3.6 GHz			-16 dBm (typical)	-17 dBm (typical)
	3.6 to 26.5 GHz				
	Tone spacing, 100 kHz to 20 MHz			-26 dBm (nominal)	-30 dBm (nominal)
	Tone spacing > 70 MHz			-16 dBm (nominal)	-16 dBm (nominal)
	26.4 to 44 GHz				-30 dBm (nominal)
<b>Displayed average noise level (DANL)</b>					
<b>(Input terminated, sample or average detector, averaging type = Log, 0 dB input attenuation, IF Gain = High, 20 to 30 °C)</b>					
<b>RF Input 1; RF Input 2 to 1 GHz; RF Input 2 performance = RF Input 1 performance +11 dB</b>					
		Specification		Typical including NFE <sup>1</sup>	
RF preselector off, preamp off	3 Hz to 10 Hz	-		-97 dBm (nominal) <sup>3</sup>	
	20 Hz <sup>2</sup>	-97 dBm		-	
	100 Hz <sup>2</sup>	-106 dBm		-	
	1 kHz <sup>2</sup>	-118 dBm		-	
	9 kHz	-119 dBm		-	
	100 kHz	-131 dBm		-	
	1 MHz	-150 dBm		-	
	10 MHz to 2.1 GHz	-150 dBm		-158 dBm	
	2.1 to 3.6 GHz	-148 dBm		-157 dBm	
	3.5 to 8.4 GHz	-148 dBm		-159 dBm	
	Option 544	-145 dBm		-153 dBm	
	8.3 to 13.6 GHz	-147 dBm		-158 dBm	
	Option 544	-147 dBm		-156 dBm	
	13.5 to 17.1 GHz	-141 dBm		-151 dBm	
	17.0 to 20.0 GHz	-142 dBm		-152 dBm	
	20.0 to 26.5 GHz	-135 dBm		-146 dBm	
	26.4 to 34.5 GHz	-141 dBm		-148 dBm	
34.4 to 44 GHz	-135 dBm		-143 dBm		
RF preselector off, preamp on	100 kHz	-144 dBm		-	
	1 MHz	-162 dBm		-	
	10 MHz to 2.1 GHz	-163 dBm		-175 dBm	
	2.1 to 3.6 GHz	-161 dBm		-173 dBm	
	3.5 to 8.4 GHz	-164 dBm		-172 dBm	
	Option 544	-161 dBm		-166 dBm	
	8.3 to 13.6 GHz	-162 dBm		-173 dBm	
	Option 544	-161 dBm		-170 dBm	
	13.5 to 17.1 GHz	-160 dBm		-171 dBm	
	17.0 to 20.0 GHz	-158 dBm		-165 dBm	
	20.0 to 26.5 GHz	-155 dBm		-162 dBm	
	26.4 to 34.5 GHz	-156 dBm		-164 dBm	
	34.4 to 44 GHz	-150 dBm		-158 dBm	

1. Typical Indicated Noise including NFE = typical DANL+ Bandwidth and Log corrections-DANL improvement with NFE.

2. Specified for instruments with prefixes MY/SG5213 or greater. Nominal for instruments with earlier prefixes.

3. No NFE at this frequency.

**Displayed average noise level (DANL) (Continued)**

(Input terminated, sample or average detector, averaging type = Log, 0 dB input attenuation, IF Gain = High, 20 to 30 °C)

RF Input 1; RF Input 2 to 1 GHz; RF Input 2 performance = RF Input 1 performance +11 dB

		Specification	Typical including NFE <sup>1</sup>
RF preselector on, preamp off	3 to 10 Hz	–	–92 dBm (nominal) <sup>2</sup>
	20 Hz <sup>3</sup>	–92 dBm	–100 dBm <sup>2</sup>
	100 Hz <sup>3</sup>	–101 dBm	–109 dBm <sup>2</sup>
	1 kHz <sup>3</sup>	–114 dBm	–120 dBm <sup>2</sup>
	9 kHz	–118 dBm	–132 dBm
	100 kHz	–130 dBm	–143 dBm
	1 to 3 MHz	–147 dBm	–158 dBm
	3 to 30 MHz	–150 dBm	–160 dBm
	30 to 300 MHz	–151 dBm	–161 dBm
	300 to 600 MHz	–153 dBm	–164 dBm
	600 MHz to 1 GHz	–151 dBm	–162 dBm
	1 to 2 GHz	–150 dBm	–161 dBm
	2 to 2.5 GHz	–152 dBm	–164 dBm
	2.5 to 3 GHz	–151 dBm	–163 dBm
	3 to 3.6 GHz	–148 dBm	–161 dBm
	3.5 to 8.4 GHz	–148 dBm	–159 dBm
	– Option 544	–145 dBm	–153 dBm
	8.3 to 13.6 GHz	–147 dBm	–158 dBm
	– Option 544	–147 dBm	–156 dBm
	13.5 to 17.1 GHz	–141 dBm	–151 dBm
17.0 to 20.0 GHz	–142 dBm	–152 dBm	
20.0 to 26.5 GHz	–135 dBm	–146 dBm	
26.4 to 34.5 GHz	–141 dBm	–148 dBm	
34.4 to 44 GHz	–135 dBm	–143 dBm	
RF preselector on, preamp on	1 kHz <sup>3</sup>	–119 dBm	–133 dBm <sup>2</sup>
	9 kHz	–143 dBm	–154 dBm
	100 kHz	–154 dBm	–165 dBm
	1 to 2 MHz	–166 dBm	–178 dBm
	2 to 30 MHz	–158 dBm	–167 dBm
	30 to 600 MHz	–159 dBm	–166 dBm
	600 to 800 MHz	–157 dBm	–166 dBm
	800 MHz to 1 GHz	–158 dBm	–167 dBm
	1 to 2 GHz	–156 dBm	–164 dBm
	2 to 2.75 GHz	–160 dBm	–168 dBm
	2.75 to 3.6 GHz	–157 dBm	–165 dBm
	3.5 to 8.4 GHz	–164 dBm	–172 dBm
	– Option 544	–161 dBm	–166 dBm
	8.3 to 13.6 GHz	–162 dBm	–173 dBm
	– Option 544	–161 dBm	–170 dBm
	13.5 to 17.1 GHz	–160 dBm	–171 dBm
	17.0 to 20.0 GHz	–158 dBm	–165 dBm
20.0 to 26.5 GHz	–155 dBm	–162 dBm	
26.4 to 34.5 GHz	–156 dBm	–164 dBm	
34.4 to 44 GHz	–150 dBm	–158 dBm	

1. Typical DANL including NFE = Typical DANL–DANL improvement with NFE.

2. No NFE factor at this frequency.

3. Specified for instruments with prefixes MY/SG5213 or greater. Nominal for instruments with earlier prefixes.

**Indicated noise in CISPR BW**

Calculated from DANL data; EMI-AVG detector, 0 dB input attenuation; indicated RBW is CISPR RBW

RF Input 1; RF Input 2 to 1 GHz; RF Input 2 performance = RF Input 1 performance +11 dB

		Typical including NFE <sup>1</sup>
RF preselector on, preamp off	3 to 10 Hz (1 Hz RBW) <sup>3</sup>	+ 17 dBuV <sup>2</sup> (nominal)
	20 Hz (1 Hz) <sup>3</sup>	+9 dBuV <sup>2</sup>
	100 Hz (10 Hz) <sup>3</sup>	+10 dBuV <sup>2</sup>
	1 kHz (100 Hz) <sup>3</sup>	+9 dBuV <sup>2</sup>
	9 kHz (200 Hz)	-2 dBuV
	100 kHz (200 Hz)	-13 dBuV
	1 to 3 MHz (9 kHz)	-11 dBuV
	3 to 30 MHz (9 kHz)	-13 dBuV
	30 to 300 MHz (120 kHz)	-3 dBuV
	300 to 600 MHz (120 kHz)	-6 dBuV
	600 MHz to 1 GHz (120 kHz)	-4 dBuV
	1 to 2 GHz (1 MHz)	+6 dBuV
	2 to 2.5 GHz (1 MHz)	+3 dBuV
	2.5 to 3 GHz (1 MHz)	+4 dBuV
	3 to 3.6 GHz (1 MHz)	+6 dBuV
	3.5 to 8.4 GHz (1 MHz)	+8 dBuV
	– Option 544	+14 dBuV
	8.3 to 13.6 GHz (1 MHz)	+9 dBuV
	– Option 544	+11 dBuV
	13.5 to 17.1 GHz (1 MHz)	+16 dBuV
17.0 to 20.0 GHz (1 MHz)	+15 dBuV	
20.0 to 26.5 GHz (1 MHz)	+21 dBuV	
26.4 to 34.5 GHz (1 MHz)	+19 dBuV	
34.4 to 44 GHz (1 MHz)	+24 dBuV	
RF preselector on, preamp on	1 kHz (100 Hz RBW) <sup>3</sup>	-4 dBuV <sup>2</sup>
	9 kHz (200 Hz)	-24 dBuV
	100 kHz (200 Hz)	-35 dBuV
	1 to 2 MHz (9 kHz)	-31 dBuV
	2 to 30 MHz (9 kHz)	-20 dBuV
	30 to 600 MHz (120 kHz)	-8 dBuV
	600 to 800 MHz (120 kHz)	-8 dBuV
	800 MHz to 1 GHz (120 kHz)	-9 dBuV
	1 to 2 GHz (1 MHz)	+3 dBuV
	2 to 2.75 GHz (1 MHz)	-1 dBuV
	2.75 to 3.6 GHz (1 MHz)	+2 dBuV
	3.5 to 8.4 GHz (1 MHz)	-5 dBuV
	– Option 544	-1 dBuV
	8.3 to 13.6 GHz (1 MHz)	-6.0 dBuV
	– Option 544	-4 dBuV
	13.5 to 17.1 GHz (1 MHz)	-4 dBuV
	17.0 to 20.0 GHz (1 MHz)	+2 dBuV
20.0 to 26.5 GHz (1 MHz)	+5 dBuV	
26.4 to 34.5 GHz (1 MHz)	+3 dBuV	
34.4 to 44 GHz (1 MHz)	+9 dBuV	

1. Typical Indicated Noise including NFE = Typical DANL+ Bandwidth and Log corrections-DANL improvement with NFE.
2. No NFE factor at this frequency.
3. Specified for instruments with prefixes MY/SG5213 or greater. Nominal for instruments with earlier prefixes.

<b>Spurious responses</b>			
<b>RF Input 1; RF preselector on and off</b>			
	Source frequency	Specification	Typical
Residual responses <sup>1</sup> (Input terminated and 0 dB attenuation)	200 kHz to 8.4 GHz (swept)	-100 dBm	
	Zero span or FFT or other frequencies	-100 dBm (nominal)	
Image responses $f \pm 645$ MHz Mixer level -10 dBm	10 MHz to 3.6 GHz	-80 dBc	-108 dBc
	3.5 to 13.6 GHz	-78 dBc	-88 dBc
	13.5 to 17.1 GHz	-74 dBc	-85 dBc
	17.0 to 22 GHz	-70 dBc	-82 dBc
	22 to 26.5 GHz	-68 dBc	-78 dBc
	26.5 to 34.5 GHz <sup>3</sup>	-70 dBc	-94 dBc
	34.4 to 44 GHz <sup>3</sup>	-60 dBc	-79 dBc
LO related spurious – ( $f > 600$ MHz from carrier)	10 MHz to 3.6 GHz		-90 dBc + $20 \times \log N^2$
Other spurious – $f \geq 10$ MHz from carrier	Carrier frequency $\leq 26.5$ GHz	-80 dBc + $20 \times \log N^2$	
	Carrier frequency $> 26.5$ GHz		-90 dBc (nominal)
<b>Second harmonic distortion (SHI)</b>			
<b>RF Input 1; input power -9 dBm, input attenuation 6 dB; RF Input 2 to 1 GHz. RF Input 2 performance = RF Input 1 performance +9 dB</b>			
	Source frequency	Specification	Typical
RF preselector off, preamp off	10 MHz to 1.0 GHz	+45 dBm	+54 dBm
	1.0 to 1.8 GHz	+41 dBm	+50 dBm
	1.8 to 6.8 GHz	+65 dBm	+68 dBm
	Option 544 1.8 to 3 GHz	+58 dBm	+64 dBm
	3 to 6.8 GHz	+60 dBm	+69 dBm
	6.8 to 11 GHz	+55 dBm	+64 dBm
	11 to 13.25 GHz	+50 dBm	+60 dBm
	13.2 to 22 GHz (Option 544)	+44 dBm	+51 dBm
RF preselector off, preamp on – Preamp power = -45 dBm – Preamp power = -50 dBm	10 MHz to 1.8 GHz		+33 dBm (nominal)
	1.8 to 13.25 GHz		+10 dBm (nominal)
	13.2 to 22 GHz (Option 544)		+0 dBm (nominal)
RF preselector on, preamp off	10 to 30 MHz	+47 dBm	+50 dBm
	30 to 500 MHz	+57 dBm	+63 dBm
	500 MHz to 1GHz	+45 dBm	+47 dBm
	1 to 1.6 GHz	+58 dBm	+70 dBm
	1.6 to 1.8 GHz	+46 dBm	+52 dBm
	1.8 to 6.8 GHz	+65 dBm	+68 dBm
	Option 544 1.8 to 3 GHz	+58 dBm	+64 dBm
	3 to 6.8 GHz	+60 dBm	+69 dBm
	6.8 to 11 GHz	+55 dBm	+64 dBm
	11 to 13.25 GHz	+50 dBm	+60 dBm
	13.2 to 22 GHz (Option 544)	+44 dBm	+51 dBm
RF preselector on, preamp on, – Input power = -9 dBm – Attenuation = 26 dB  – Preamp power = -50 dBm	10 to 300 MHz		+53 dBm (nominal)
	300 to 500 MHz		+58 dBm (nominal)
	500 MHz to 1 GHz		+47 dBm (nominal)
	1 to 1.6 GHz		+53 dBm (nominal)
	1.6 to 1.8 GHz		+30 dBm (nominal)
	1.8 to 13.25 GHz		+10 dBm (nominal)
	13.2 to 22 GHz (Option 544)		+0 dBm (nominal)

1. RF2 performance = RF1 performance +11 dB.
2. N is the LO multiplication factor.
3. Mixer level -30 dBm.

### Third-order intermodulation distortion (TOI)

(Two -14 dBm tones at input and 4 dB of input attenuation; tone separation > 5 times IF prefilter bandwidth, 20 to 30 °C, see Specifications Guide for IF prefilter bandwidths); RF Input 1; RF Input 2 to 1 GHz; RF Input 2 performance = RF Input 1 performance +9 dB

		TOI	TOI (typical)
RF preselector off, preamp off	10 to 100 MHz	+12 dBm	+17 dBm
	100 to 400 MHz	+15 dBm	+20 dBm
	400 MHz to 1.7 GHz	+16 dBm	+20 dBm
	1.7 to 3.6 GHz	+16 dBm	+19 dBm
	3.5 to 8.4 GHz	+15 dBm	+18 dBm
	8.3 to 13.6 GHz	+15 dBm	+18 dBm
	13.5 to 26.5 GHz	+10 dBm	+14 dBm
	26.4 to 44 GHz	+10 dBm	+13 dBm
RF preselector off, preamp on	10 to 500 MHz		+4 dBm (nominal)
	500 MHz to 3.6 GHz		+5 dBm (nominal)
	3.6 to 26.5 GHz		-15 dBm (nominal)
	26.4 to 44 GHz		-17 dBm (nominal)
RF preselector on, preamp off	10 to 30 MHz	+12 dBm	+16 dBm
	30 MHz to 1 GHz	+12.5 dBm	+15 dBm
	1 to 1.5 GHz	+12.5 dBm	+14 dBm
	1.5 to 3.6 GHz	+14.5 dBm	+16 dBm
	3.5 to 8.4 GHz	+15 dBm	+18 dBm
	8.3 to 13.6 GHz	+15 dBm	+18 dBm
	13.5 to 26.5 GHz	+10 dBm	+14 dBm
	26.4 to 44 GHz (Option 544)	+10 dBm	+13 dBm
	RF preselector on, preamp on	10 to 30 MHz	-9 dBm
30 MHz to 1 GHz		-9 dBm	-4 dBm
1 to 2 GHz		-4 dBm	-2 dBm
2 to 3.6 GHz		-6 dBm	-3 dBm
3.6 to 26.5 GHz			-15 dBm (nominal)
26.4 to 44 GHz (Option 544)			-17 dBm (nominal)

Phase noise <sup>2</sup>	Offset	Specification	Typical
Noise sidebands - (20 to 30 °C, CF = 1 GHz)	10 Hz	-	-80 dBc/Hz (nominal)
	100 Hz	-91 dBc/Hz	-100 dBc/Hz
	1 kHz		-112 dBc/Hz (nominal)
	10 kHz	-113 dBc/Hz	-114 dBc/Hz
	100 kHz	-116 dBc/Hz	-117 dBc/Hz
	1 MHz	-135 dBc/Hz	-136 dBc/Hz
	10 MHz		-148 dBc/Hz (nominal)

1. Preamp input power = input power - input attenuation (-9 dB for input 2).
2. For nominal values, refer to Figure 1.

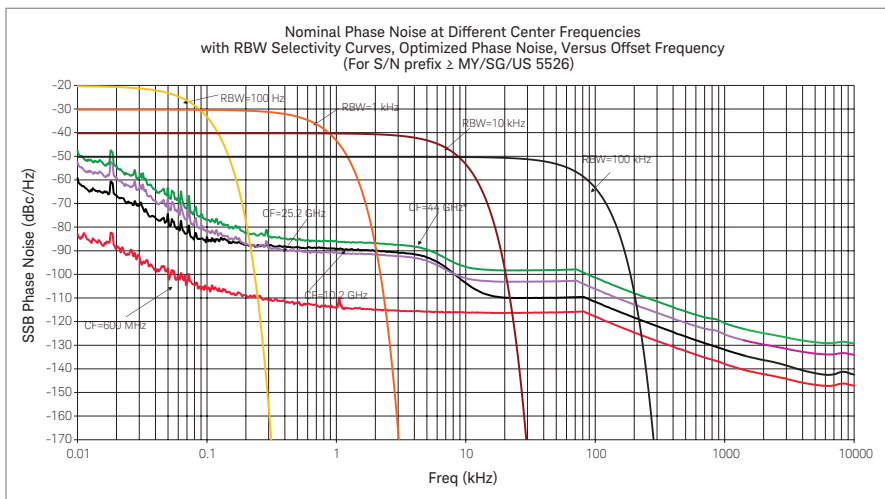


Figure 1. Nominal phase noise at different center frequencies.

# PowerSuite Measurement Specifications

<b>Channel power</b>		
Amplitude accuracy, W-CDMA or IS95 (20 to 30 °C, attenuation = 10 dB)	± 0.82 dB (± 0.23 dB 95 <sup>th</sup> percentile)	
<b>Occupied bandwidth</b>		
Frequency accuracy	± [span/1000] (nominal)	
<b>Adjacent channel power</b>		
Accuracy, W-CDMA (ACLR)		
(at specific mixer levels and ACLR ranges)	Adjacent	Alternate
– MS	± 0.14 dB	± 0.21 dB
– BTS	± 0.49 dB	± 0.44 dB
Dynamic range (typical)		
– Without noise correction	–73 dB	–79 dB
– With noise correction	–78 dB	–82 dB
Offset channel pairs measured	1 to 6	
ACP measurement and transfer time (fast method)	14 ms (nominal) ( $\sigma = 0.2$ dB)	
Multiple number of carriers measured	Up to 12	
<b>Power statistics CCDF</b>		
Histogram resolution	0.01 dB	
<b>Harmonic distortion</b>		
Maximum harmonic number	10 <sup>th</sup>	
Result	Fundamental power (dBm), relative harmonics power (dBC), total harmonic distortion in %	
Intermod (TOI)	Measure the third-order products and intercepts from two tones	
<b>Burst power</b>		
Methods	Power above threshold, power within burst width	
Results	Single burst output power, average output power, maximum power, minimum power within burst, burst width	
<b>Spurious emission</b>		
W-CDMA (1 to 3.6 GHz) table-driven spurious signals; search across regions		
– Dynamic range	96.7 dB	101.7 dB (typical)
– Absolute sensitivity	–85.4 dBm	
<b>Spectrum emission mask (SEM)</b>		
cdma2000® (750 kHz offset)		
– Relative dynamic range (30 kHz RBW)	78.9 dB	85 dB (typical)
– Absolute sensitivity	–100.7 dBm	
– Relative accuracy	± 0.12 dB	
3GPP W-CDMA (2.515 MHz offset)		
– Relative dynamic range (30 kHz RBW)	81.9 dB	88.2 dB (typical)
– Absolute sensitivity	–100.7 dBm	
– Relative accuracy	± 0.12 dB	



# General Specifications

## Temperature range

Operating	0 to 55 °C
Storage	-40 to 70 °C

## EMC

Complies with European EMC Directive 2004/108/EC

- IEC/EN 61326-2-1
- CISPR Pub 11 Group 1, class B
- AS/NZS CISPR 11
- ICES/NMB-001

This ISM device complies with Canadian ICES-001

Cet appareil ISM est conforme à la norme NMB-001 du Canada

## Radio disturbance measuring apparatus

CISPR 16-1-1	The features in this instrument comply with the performance requirements of this basic standard <sup>1</sup>
--------------	--

## Safety

Complies with European Low Voltage Directive 2006/95/EC

- IEC/EN 61010-1 2nd Edition
- Canada: CSA C22.2 No. 61010-01-04
- USA: UL 61010-1 2nd Edition

## Acoustic noise emission

LpA < 70 dB

Operator position

Normal position

Per ISO 7779

## Geraeuschemission

LpA < 70 dB

Am Arbeitsplatz

Normaler Betrieb

Nach DIN 45635 t.19

## Environmental stress

Samples of this product have been type tested in accordance with the Keysight Environmental Test Manual and verified to be robust against the environmental stresses of storage, transportation, and end-use; those stresses include, but are not limited to, temperature, humidity, shock, vibration, altitude, and power line conditions; test methods are aligned with IEC 60068-2 and levels are similar to MIL-PRF-28800F Class 3

1. The use of Noise Floor Extension (NFE) is required to meet the "isolated pulse" test case in Bands B, C, and D. In addition, when making measurements in Band B below 160 kHz using time domain scans or making measurements using meters in monitor spectrum, NFE is also required to meet the 1 Hz pulse repetition frequency (prf) test case for the quasi-peak detector (QPD) and for the 5 Hz prf test case for the RMS-avg detector.

<b>Power requirements</b>	
Voltage and frequency (nominal)	100 to 120 V, 50/60/400 Hz 220 to 240 V, 50/60 Hz
Power consumption	
– On	450 W maximum
– Standby	20 W
<b>Display</b>	
Resolution	1024 x 768, XGA
Size	213 mm (8.4 in.) diagonal (nominal)
<b>Data storage</b>	
Internal	≥ 80 GB (nominal) (removable solid state drive)
External	Supports USB 2.0 compatible memory devices
<b>Weight (without options)</b>	
Net	24 kg (52 lbs) (nominal)
Shipping	36 kg (79 lbs) (nominal)
<b>Dimensions</b>	
Height	177 mm (7.0 in)
Width	431 mm (17.0 in)
Length	535 mm (21.0 in)
<b>Calibration cycle</b>	
The recommended calibration cycle is one year; calibration services are available through Keysight service centers	

# Inputs and Outputs

## Front panel

### RF input

- RF Input 1 Connector Type-N female, 50  $\Omega$  (nominal) (standard)  
3.5 mm male, 50  $\Omega$  (Opt C35)  
2.4 mm male, 50  $\Omega$  (Option 544 only)
- RF Input 2 Connector Type-N female, 50  $\Omega$  (nominal) (standard)

### External Mixing (Option EXM)

- Connection port
  - Connector SMA, female
  - Impedance 50  $\Omega$ , nominal
  - Functions Triplexed for LO output, IF input, and mixer bias
- Mixer bias range  $\pm 10$  mA in 10  $\mu$ A step
- IF input center frequency
  - IF BW path  $\leq 25$  MHz 322.5 MHz (note - please use the proper  $\leq$  sign)
  - 85 MHz BW IF path 300 MHz
- LO output frequency range 3.75 to 14.0 GHz

### Probe power

- Voltage/current +15 Vdc,  $\pm 7\%$  at 150 mA max (nominal)  
–12.6 Vdc,  $\pm 10\%$  at 150 mA max (nominal)

### USB 2.0 ports

- Host (2 ports)
  - Standard Compatible with USB 2.0
  - Connector USB Type-A female
  - Output current 0.5 A (nominal)

### Headphone jack

- Connector Miniature stereo audio jack 3.5 mm

## Rear panel

### 10 MHz out

- Connector BNC female, 50  $\Omega$  (nominal)
- Output amplitude  $\geq 0$  dBm (nominal)
- Frequency 10 MHz  $\times$  (1+ frequency reference accuracy)

### Ext Ref In

- Connector BNC female, 50  $\Omega$  (nominal)
- Input amplitude range –5 to 10 dBm (nominal)
- Input frequency 1 to 50 MHz (nominal)
- Frequency lock range  $\pm 5 \times 10^{-6}$  of specified external reference input frequency

### Trigger 1 and 2 inputs

- Connector BNC female
- Impedance  $> 10$  k $\Omega$  (nominal)
- Trigger level range –5 to 5 V

### Trigger 1 and 2 outputs

- Connector BNC female
- Impedance 50  $\Omega$  (nominal)
- Level 0 to 5 V (CMOS)

**Rear panel (continued)**

Monitor output	
– Connector	VGA compatible, 15-pin mini D-SUB
– Format	XGA (60 Hz vertical sync rates, non-interlaced) Analog RGB
– Resolution	1024 x 768
Noise source drive +28 V (pulsed)	
– Connector	BNC female
SNS Series noise source	For use with Keysight Technologies' SNS series noise sources
Analog out	
– Connector	BNC female (used by Option YAS)
USB 2.0 ports	
– Host (4 ports)	
– Standard	Compatible with USB 2.0
– Connector	USB Type-A female
– Output current	0.5 A (nominal)
– Device (1 port)	
– Standard	Compatible with USB 2.0
– Connector	USB Type-B female
GPIO interface	
– Connector	IEEE-488 bus connector
– GPIO codes	SH1, AH1, T6, SR1, RL1, PP0, DC1, C1, C2, C3, C28, DT1, L4, C0
– GPIO mode	Controller or device
LAN TCP/IP interface	
– Standard	1000Base-T
– Connector	RJ45 Ethertwist
Aux I/O connector	
– Connector	25-pin D-SUB

# I/Q Analyzer

## Resolution bandwidth (spectrum measurement)

Range	
– Overall	100 mHz to 3 MHz
– Span = 1 MHz	50 Hz to 1 MHz
– Span = 10 kHz	1 Hz to 10 kHz
– Span = 100 Hz	100 mHz to 100 Hz

## Window shapes

Flat top, Uniform, Hanning, Gaussian, Blackman, Blackman-Harris, Kaiser Bessel (K-B 70 dB, K-B 90 dB and K-B 110 dB)

## Analysis bandwidth

Standard	10 Hz to 10 MHz
Option B25	10 Hz to 25 MHz
Option B85	10 Hz to 85 MHz

## IF frequency response (standard 10 MHz IF path)

IF frequency response (demodulation and FFT response relative to the center frequency, 20 to 30 °C)

Center frequency (GHz)	Span (MHz)	Microwave preselector	Max. error	RMS (nominal)
≤ 3.6	≤ 10	NA	± 0.40 dB	0.04 dB
3.6 < f ≤ 26.5	≤ 10	On		0.25 dB
f > 26.5	≤ 10	On		0.35 dB

IF phase linearity (deviation from mean phase linearity, nominal)

Center frequency (GHz)	Span (MHz)	Microwave preselector	Peak-to-peak (nominal)	RMS (nominal)
0.02 < f ≤ 3.6	≤ 10	NA	0.4°	0.1°
3.6 < f ≤ 26.5	≤ 10	On	1.0°	0.2° (nom)

## Data acquisition (10 MHz IF path)

Time record length	
– IQ analyzer	4,000,000 IQ sample pairs
Sample rate at ADC	100 MSa/s
ADC resolution	16 bits

# I/Q Analyzer – Option B25

## 25 MHz analysis bandwidth

### IF frequency response

IF frequency response (demodulation and FFT response relative to the center frequency, 20 to 30 °C)

Center frequency (GHz)	Span (MHz)	Microwave preselector	Max. error	RMS (nominal)
≤ 3.6	10 to ≤ 25	NA	± 0.45 dB	0.051 dB
3.6 < f ≤ 44	10 to ≤ 25	On		0.45 dB

IF phase linearity (deviation from mean phase linearity, nominal)

Center frequency (GHz)	Span (MHz)	Microwave preselector	Peak-to-peak (nominal)	RMS (nominal)
0.02 ≤ f < 3.6	≤ 25	NA	0.6°	0.14°
3.6 ≤ f ≤ 26.5	≤ 25	On	4.5°	1.2°

### Data acquisition (25 MHz IF path)

Time record length (IQ pairs)			
– IQ analyzer	4,000,000 IQ sample pairs		
– 89600 VSA software	Data packing		
	32-bit	64-bit	Memory
	536 MSa	268 MSa	2 GB
Sample rate at ADC	100 MSa/s		
ADC resolution	16 bits		

# I/Q Analyzer – Option B85

## 85 MHz analysis bandwidth

<b>IF frequency response</b>					
IF frequency response (20 to 30 °C)				Relative to center frequency	
Center freq. (GHz)	Span (MHz)	Microwave preselector		Typical	RMS (nominal)
$0.15 \leq f < 3.6$	$\leq 85$	NA	$\pm 0.6$ dB	$\pm 0.17$ dB	0.05 dB
IF phase linearity (deviation from mean phase linearity, nominal)					
Center freq. (GHz)	Span (MHz)	Microwave preselector		Peak-to-peak (nominal)	RMS (nominal)
$0.03 \leq f < 3.6$	$\leq 85$	NA		1.6°	0.54°
<b>Dynamic range</b>					
SFDR (Spurious-free dynamic range)					
– Signal frequency and spurious response anywhere within 85 MHz BW		–76 dBc, nominal			
<b>Full scale (ADC clipping)</b>					
Default settings, signal at CF (IF gain = Low: IF gain offset = 0 dB)					
– Band 0		–8 dBm mixer level, nominal			
– Band 1 through 4		–7 dBm mixer level, nominal			
High gain setting, signal at CF (IF gain = High)					
– Band 0		–18 dBm mixer level nominal, subject to gain limitations			
– Band 1 through 4		–17 dBm mixer level nominal, subject to gain limitations			
Effect of signal frequency $\neq$ CF		Up to $\pm 3$ dB, nominal			
<b>Data acquisition (85 MHz IF path)</b>					
Time record length					
– IQ analyzer		4,000,000 IQ sample pairs			
– 89600 VSA software		Data packing			
		32-bit		64-bit	
– Length (IQ sample pairs)		536 MSa ( $2^{29}$ Sa)		268 MSa ( $2^{28}$ Sa) 2 GB total memory	
– Length (time units)		Samples/(span x 1.25)			
<b>Sample rate</b>					
– At ADC		400 Msa/s			
– IQ pairs		Span dependent			
ADC resolution		14 bits			

# Real-Time Spectrum Analyzer (RTSA) <sup>1</sup>

## Option RT1

Real-time analysis		
Real-time analysis bandwidth		
– Option RT1	Up to 85 MHz ≤ 3.6 GHz Up to 40 MHz > 3.6 GHz	
Minimum signal duration with 100% probability of intercept (POI) at full amplitude accuracy		
– Option RT1	3.7 μs	
Minimum acquisition time	104 μs	Spectrogram view only
FFT rate	292,969/s	
Supported triggers	Level, Level with time qualified (TQT), Line, External, RF burst, Frame, Frequency mask (FMT), FMT with TQT	

1. For additional RTSA specifications, please refer to Option RT1 Chapter in the MXE Signal Analyzer specifications guide (part number: N9038-90010).

## Related Literature

### Keysight MXE EMI receiver

Publication title	Publication number
MXE EMI Receiver, <i>Configuration Guide</i>	5990-7419EN
MXE EMI Receiver, <i>Brochure</i>	5990-7422EN

Learn more at: [www.keysight.com](http://www.keysight.com)

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

