



TECHNICAL DATA

Fluke 700PD6 Dual Pressure Module



Key features

- Rugged urethane molded case protects the module from rough handling and harsh conditions
- Features internal temperature compensation from 0 °C to 50 °C for full-accuracy performance
- Includes NIST-traceable calibration certificate
- Module can be calibrated locally using the Fluke 700PCK Pressure Calibration Kit, a PC, and a precision pressure source
- One year warranty

Product overview: Fluke 700PD6 Dual Pressure Module

Display pressure readings in any of 10 different pressure units you specify in the calibrator setup


Specifications: Fluke 700PD6 Dual Pressure Module

Specifications	
Range	-15/100 psi / -100/690 kPa
Resolution	0.01 / 0.07
Reference uncertainty (23 ± 3°C)	0.025%
Total ¹ uncertainty 1 year	0.050
High side media ²	316 SS



Low side media ²	N/A
<p>1. Total uncertainty, one year for temperature range 0°C to +50°C. Total uncertainty, 1.0% of full span for temperature range -10°C to 0°C. Compensated temperature range is 15°C to 35°C.</p> <p>2. "Dry" indicates dry air or non-corrosive gas as compatible media. "316 SS" indicates media compatible with Type 316 Stainless Steel. "C276" indicates media compatible with Hastelloy C276.</p>	

Ordering information

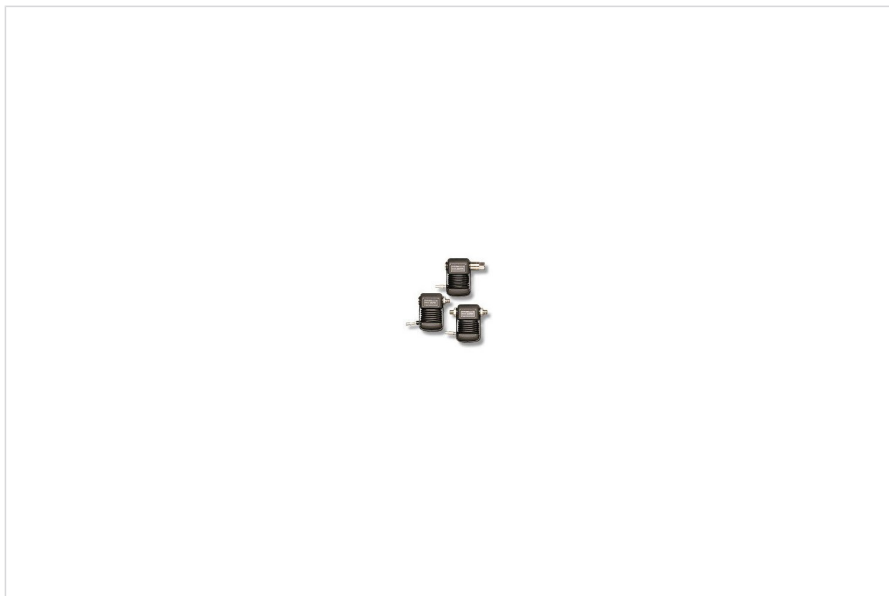

Fluke 700PD6

Dual Pressure Module

Fluke 700PD6 Dual Pressure Module

Fluke. *Keeping your world up and running.®*

Fluke Corporation
PO Box 9090, Everett, WA 98206 U.S.A.

For more information call:
In the U.S.A. (800) 443-5853
In Canada (800) 36-FLUKE
From other countries +1 (425) 446-5500
www.fluke.com

©2023 Fluke Corporation.
Specifications subject to change without notice.
01/2023

**Modification of this document is not permitted
without written permission from Fluke Corporation.**