




Immunity Te

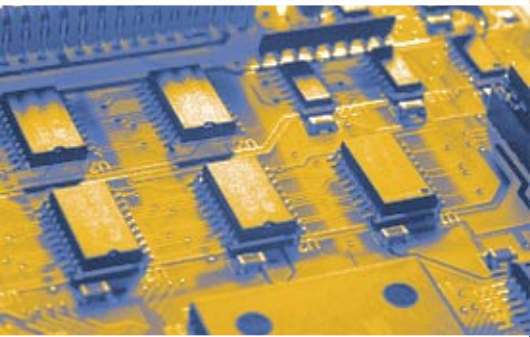


Transient Test System

| | |
|--|-----------|
| Brief Overview of Phenomena | 2 |
| Applicable Standards | 3 |
| Test System Overview | 4 |
| Specifications | 9 |
| Accessories and Options | 10 |
| Software | 14 |
| EMC PARTNER's Product Range | 15 |

Brief Overview of Phenomena


Transient Test System generates EMC events that can be observed in the low power distribution system, telecommunication or data lines.

Transient Test System replicates the following phenomena:




- Electrostatic Discharges (ESD)

A person becomes electrostatically charged by walking over an insulating floor surface. The capacity of the body can be charged to several kilovolts and is discharged when contact is made with an electronic unit or system. The discharge is visible as a spark in many cases and can be felt by the person concerned, who receives a „shock“. The discharges are harmless to humans, but not to sensitive, electronic equipment. The resulting currents cause interference or make entire systems „crash“.



- Electric Fast Transients (EFT) / Burst


Industrial measurement and control equipment nearly always use conventional control units containing relays or other electro-mechanical switching devices. Fluorescent lamp ballast units, insufficiently suppressed motors (hair dryers, vacuum cleaners, drills, etc.) are found everywhere in the public power supply. All of these are primarily inductive loads which generate interference when switched on or off. EFT events, can cause microprocessor units to malfunction or reset, with corresponding disruption to normal operation.



- Combination Wave Generator (CWG), Ring Wave and 10/700µs

Surge events can be generated by lightning phenomena, switching transients or the activation of protection devices in the power distribution system. A surge itself is influenced by the propagation path taken so that impulses from the same event may have different forms depending upon where a measurement is taken. Combination Wave Generators (CWG) simulate a surge event in power lines close to or within buildings. Ring waves are bipolar oscillatory events, only measured on power lines within a well protected environment. Because of the special impedance characteristics within telephone systems, surges tend to be longer and are represented by the 10/700µs waveform.

Mostly the disturbances are tolerable because they are single events.



- Power Frequency and Pulse Magnetic Fields

Under normal operating conditions, an AC current generates a steady magnetic field so that equipment, such as monitors, close to AC power lines could suffer interference. Under fault conditions, a sudden high current level can result in a short duration magnetic field.

Lightning strokes or short circuit fault currents in the power network can generate high level short duration magnetic fields.



- AC & DC Dips/Interrupts

Voltage failures occur following switching operations, short-circuits, response of fuses and when running up heavy loads.

The quality of the electrical power supply is increasingly becoming a central topic of discussion. The interference sources in the mains, caused by electronic power control with non-linear components e.g. thyristors are used more frequently in domestic appliances such as hotplates, heating units, washing machines, television sets, economy lamps, PCs and industrial systems with speed-controlled drives.

Accessories are available to extend applications to include:

- Common mode tests (DC to 150kHz)
- Telecommunication tests (10/700µs balanced & un-balanced)
- Three phase testing to 32A (EFT, surge, ring wave)
- Three phase testing to 32A (dips & interrupts)

Applicable Standards

International Electrotechnical Committee (IEC)

IEC 61000-4-2 (A2:2000): Testing and measurement techniques - Electrostatic discharge immunity test.

IEC 61000-4-4 (Ed2:2004): Testing and measurement techniques - Electrical fast transient / burst immunity test.

IEC 61000-4-5 (A1:2000): Testing and measurement techniques - Surge immunity test.

IEC 61000-4-8 (A2:2000): Testing and measurement techniques - Power frequency magnetic field immunity test.

IEC 61000-4-9 (A2:2000): Testing and measurement techniques - Pulse magnetic field immunity test.

IEC 61000-4-11 (Ed2:2004): Testing and measurement techniques - Voltage dips, short interruptions and voltage variations immunity tests.

IEC 61000-4-12 (A2:2000): Testing and measurement techniques - Oscillatory waves immunity test (Ring wave).

IEC 61000-4-16 (A2:2000): Testing and measurement techniques - Test for immunity to conducted, common mode disturbances in the frequency range 0Hz to 150kHz.

IEC 61000-4-29 (A2:2000): Testing and measurement techniques - Voltage dips, short interruptions and voltage variations on d.c. input power port immunity tests.



European Standard (EN)

The same standards are applicable as for IEC (see above).



International Telecommunications Union (ITU)

K.20 (February 2000): Resistibility of Telecommunications Equipment installed in a telecommunications centre to overvoltages and overcurrents



American National Standards Institute (ANSI)

C62.41 (Date): American National Standard for Electrostatic Discharge Test Methodologies and Criteria for Electronic Equipment.



Test System Overview

Test System Feature

Transient Test System has many unique and outstanding features:

- up to 6kV surge levels
- CWG, 10/700 μ s **and** ring wave together in one instrument
- Internal motor variac
- All parameters on one screen
- Parameter change during operation (+/-)
- Internal program memory
- Backlit LCD display
- Electronic polarity change
- Semiconductor switches
- Compact design
- Fulfills ALL standard requirements
- Magnetic field test menu
- Expansion to 3-phase capability
- Remote control and software upgrade through standard interface
- Wide range of accessories
- 2 year warranty

User Benefits

The technical excellence and many unique features translate directly into benefits for the user:

- Cost effective solution to meet many test requirements
- Increase quality of test object
- Real time parameter change, ideal development tool
- Save operator time with the automated test routines and test report facility
- Easy integration into a full test suite
- Unparalleled reliability and system up-time

Generators

Transient Test System comprises three generator models (TRA2000, TRA2000IN4 and TRA2000IN6).

Available with single or multiple events (ESD, EFT, surge, ring, dips), they can be upgraded to add further capability when required. Unique in their class, all three models include, as standard, an internal motor variac to enable dips and variation tests, at any user programmable level, as per IEC 61000-4-11.

The most significant test parameters can be programmed and then adjusted in real time to assist in finding the exact immunity level of an EUT. The +/- keys are used to adjust; test voltage level, EFT spike frequency, EFT burst duration, synchronisation angle, polarity and EUT supply voltage (via internal variac). The coupling paths; Line, Neutral and Protective Earth can either be automatically programmed or manually selected using switches on the front panel.

Standard accessories include 10A and 16A mains cables, GENECS remote control software on a CD, serial link cable to use with the GENECS software, user manual with verification protocol and conformity declaration.

- TRA2000

Capable of being equipped with ESD up to 15kV air discharge (requires ESD2000), EFT, CWG up to 4kV (1.2/50µs open circuit and 8/20µs short circuit), AC dips/interrupts & variations plus DC interrupts. TRA2000 features a single phase 16A AC/DC CDN enabling all power borne immunity tests to be performed on a single EUT without unplugging or reconfiguring the test set-up.

TRA2000 limited feature versions can be upgraded to full configuration when the need for additional tests arises.



TRA2000

- TRA2000IN4

Similar to TRA2000 as described above, TRA2000IN4 has enhanced capability in the form of a 10/700µs surge impulse for telecom testing up to 4kV and the 100kHz ring wave for ANSI C62.41 and IEC61000-4-12, up to 6kV. Just like TRA2000, an automatic integrated single phase CDN enables EUT power to be supplied continuously even when switching between test types.



TRA2000IN4

- TRA2000IN6

A further enhancement of the TRA2000, TRA2000IN6 is the most complete compact generator available. Offering in a single unit phenomenal power and unparalleled capability. All the features available in both TRA2000 and TRA2000IN4 are included in the TRA2000IN6, plus the ability to perform CWG 1.2/50µs open circuit and 8/20µs short circuit and 10/700µs surges up to 6kV.



TRA2000IN6


Long duration testing is made easier by use of the EMC PARTNER software packages. Using either GENECS or TEMA software, the units can be programmed, automatically started and test reports generated.

The compact design enables many different test standards to be performed using only a single unit. A broad range of accessories enable testing to many additional applications.


Special configurations are available to meet unique customer requirements, long duration voltage interrupts as required for Electricity meter testing (IEC62052-11 Annex B) are one example of the many unique capabilities available from EMC PARTNER.

Flowcharts


ESD

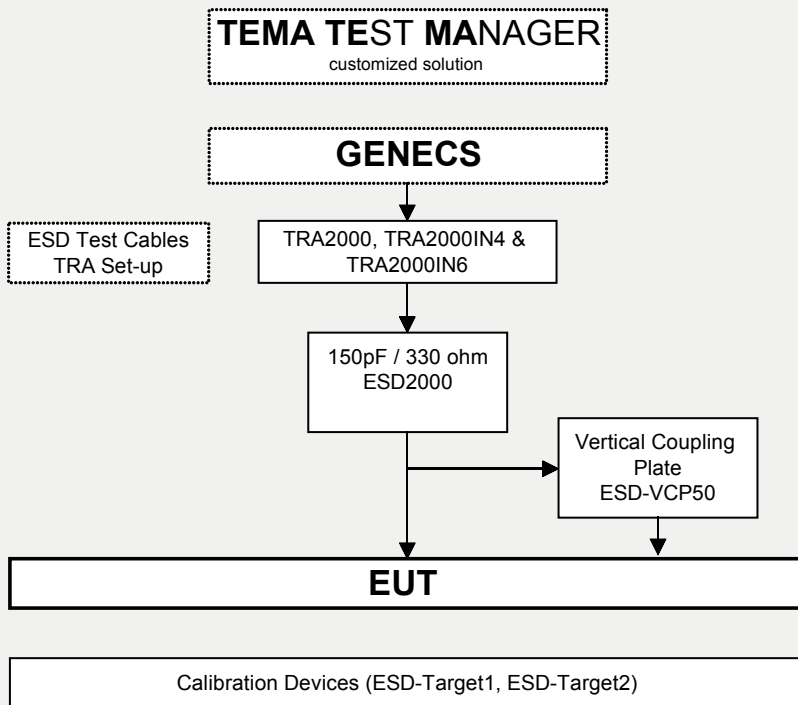


EFT

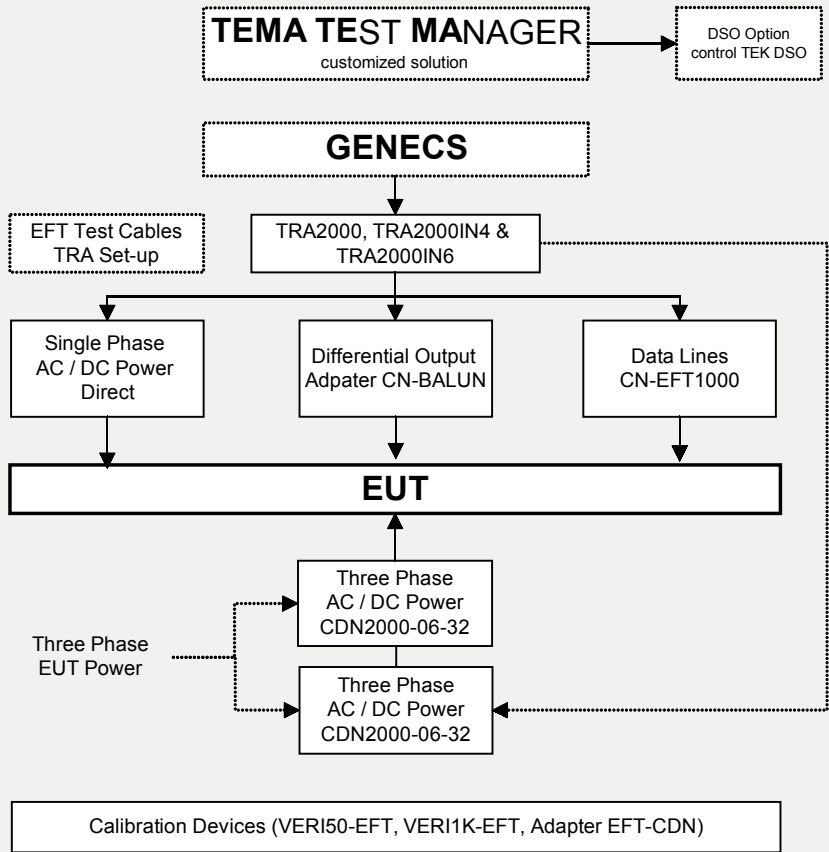


CWG

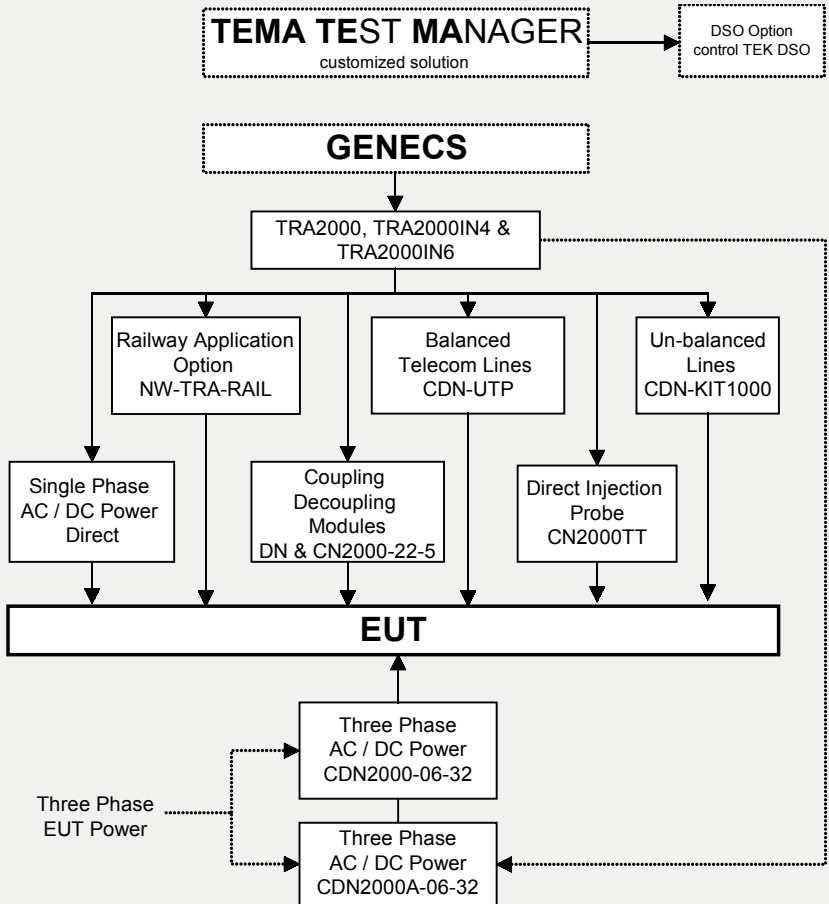


Ring Wave 100kHz

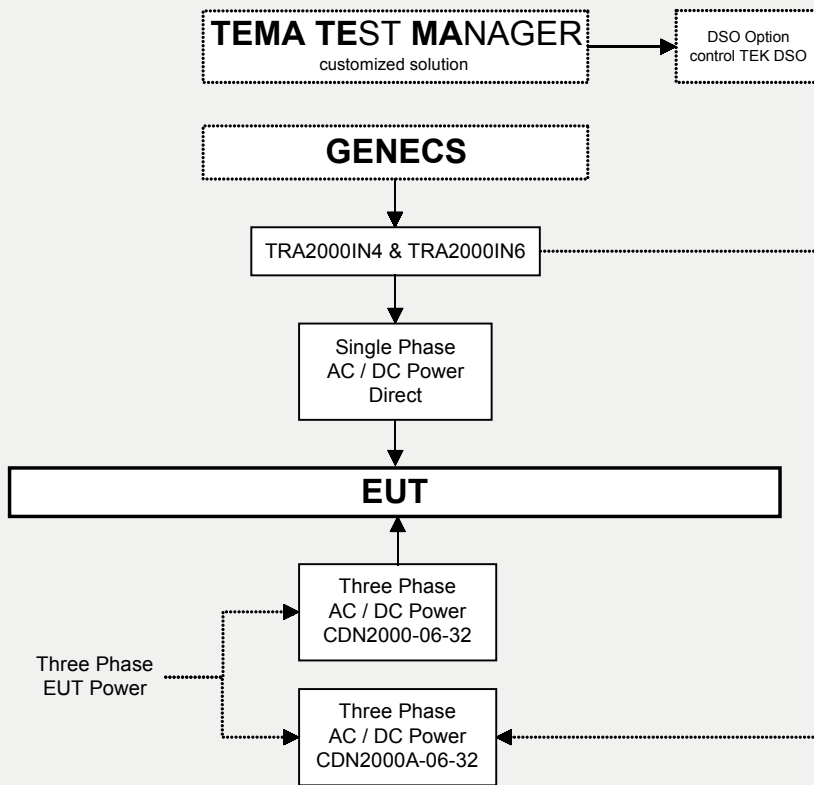


10/700μs

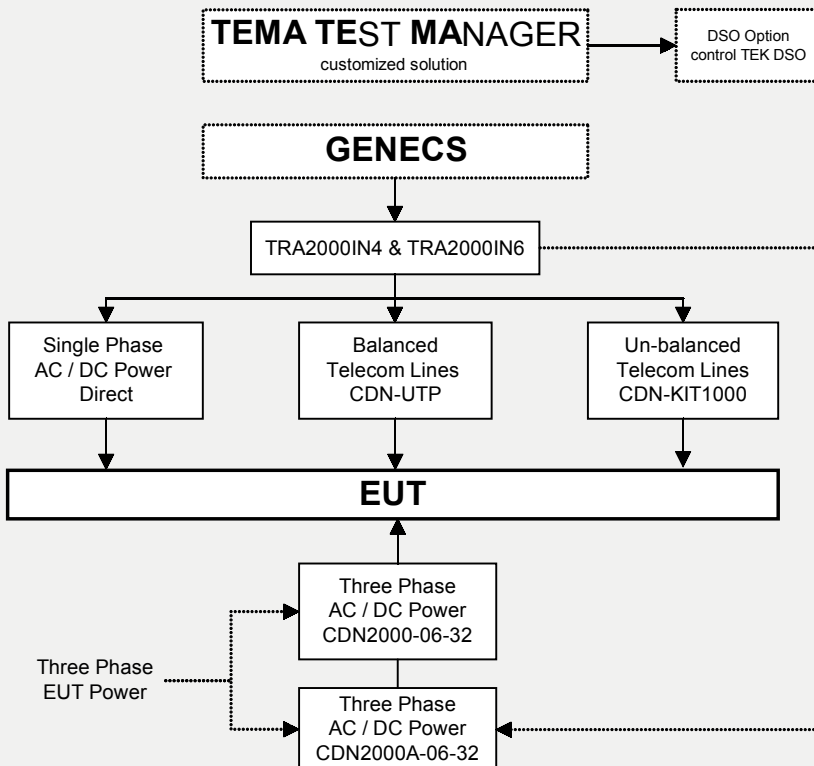

Dips/Variations and Common Mode Tests

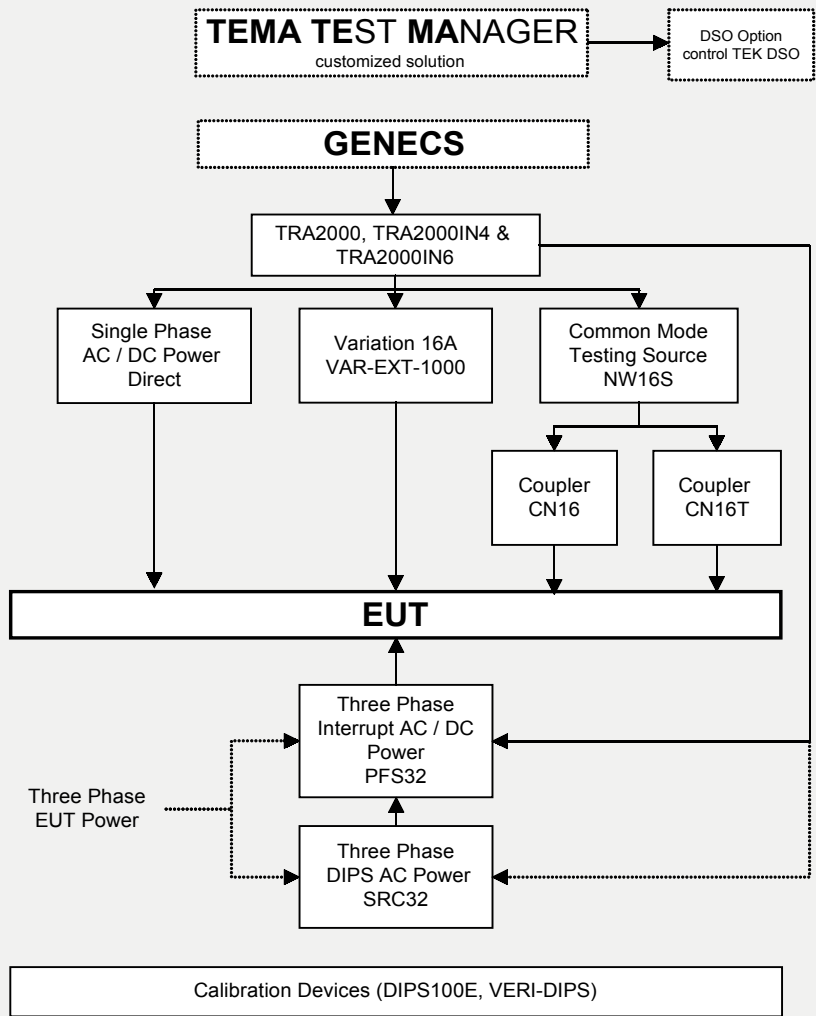

Magnetic Fields

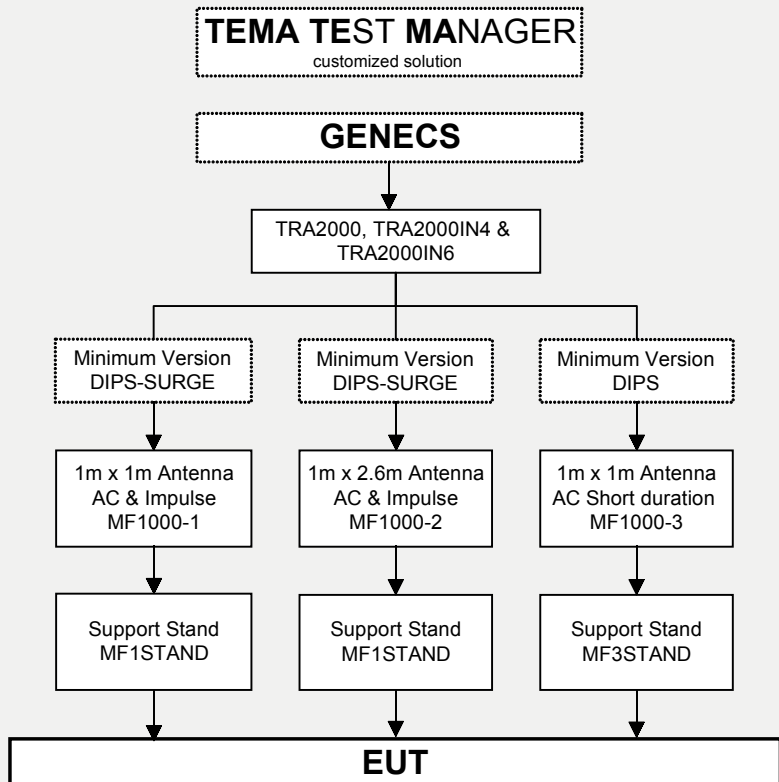

Generator Specifications

ESD

| | |
|---------------------------------------|-------------------------------------|
| Air discharge | 2 up to 16kV |
| Contact discharge | 2 up to 10kV |
| Voltage increment resolution | 1 volt steps |
| Contact discharge repetition interval | 0.05 to 30s |
| Discharge detection | every pulse or real discharges only |
| Discharge counter | 1 to 29999 |
| Discharge polarity | positive, negative and alternating |
| Holding time | 5s |
| Programmable parameter ramps | voltage, polarity |
| Discharge trigger | manual or automatic |

EFT

| | |
|------------------------------|---|
| Voltage range | 0.25 up to 4.4kV |
| Source impedance | 50ohm |
| Pulse front time at 50ohm | 5ns |
| Pulse duration at 50ohm | 50ns |
| Spike repetition frequency | up to 1MHz |
| Programmable parameter ramps | voltage, spike frequency, burst duration, synchronisation |
| Spike distribution | IEC burst pattern and random |

CWG

| | |
|---|---|
| Voltage range | 0.25 up to 4.1kV (6kV for TRA2000IN6) |
| Current range | 0.125 up to 2.1kA (3kA for TRA2000IN6) |
| Source impedance | 2ohm |
| Pulse front time at open circuit | 1.2µs |
| Pulse duration at open circuit | 50µs |
| Pulse front time at short circuit | 8µs |
| Pulse duration at short circuit | 20µs |
| Pulse repetition | up to 20 pulses per minute |
| Programmable parameter ramps | voltage, synchronisation |
| Synchronisation on power line frequencies | 16Hz up to 400Hz |

10/700µs

| | |
|-----------------------------------|---|
| Voltage range | 0.25 up to 4kV (6kV for TRA2000IN6) |
| Current range | 16.6 up to 266A for TRA2000IN4 / 400A for TRA2000IN6 |
| Source impedance | 15ohm + 25ohm |
| Pulse front time at open circuit | 10µs |
| Pulse duration at open circuit | 700µs |
| Pulse front time at short circuit | 4µs (40ohm) |
| Pulse duration at short circuit | 300µs (40ohm) |
| Pulse repetition | up to 4 pulses per minute |

100kHz Ring Wave

| | |
|----------------------------------|----------------|
| Voltage range | 0.25 up to 6kV |
| Current range | 20 up to 500A |
| Source impedance | 12ohm & 30ohm |
| Pulse front time at open circuit | 0.5µs |

| | |
|-----------------------------|----------------------------|
| Pulse oscillation frequency | 100kHz |
| Pulse decay | 60% first to second peak |
| Pulse repetition | up to 10 pulses per minute |

Dips/Interrupts

| | |
|-----------------------|---|
| Voltage range | 0 up to 260Vrms |
| Frequency range | DC up to 400Hz with external supply |
| Rated current | 16A for dips 0/100% |
| Interruption period | 50µs up to 30s |
| Selectable dip range | 0 up to 100% continuously ¹⁾ |
| Phase synchronisation | dips, interrupts & EUT supply |

¹⁾ 5A dips with standard variac. 16A dips requires VAR-EXT1000.

Selection Guide

| Generator | Circuit(s) | Upgrade |
|------------|--|----------|
| TRA2000 | ESD, EFT, surge, dips | No |
| TRA2000 | dips | Yes |
| TRA2000 | ESD, EFT | Yes |
| TRA2000 | surge, dips | Yes |
| TRA2000 | ESD, EFT, dips | Yes |
| TRA2000 | ESD, EFT, surge | Yes |
| TRA2000 | EFT, surge, dips | Yes |
| TRA2000 | surge | Yes |
| TRA2000IN4 | ESD, EFT, surge, 10/700, ring wave, dips | No |
| TRA2000IN4 | EFT, surge, 10/700, ring wave, dips | No |
| TRA2000IN6 | ESD, EFT, surge, ring wave, dips | 10/700µs |
| TRA2000IN6 | EFT, surge, ring wave, dips | No |
| TRA2000IN6 | surge, ring wave, dips | No |
| TRA2000IN6 | EFT, surge | No |
| TRA2000IN6 | ESD, surge | No |

Accessories and Options

Vertical Coupling Plate ESD-VCP50



CDN2000-06-32



TEST SETUP

Test package for ESD and EFT testing. This includes all the mechanical items needed to perform these test types. Vertical coupling plate with 2 x 470kohm resistors and 2 x 10cm EFT insulation.

CDN2000-06-32 for Three Phase Coupling

Add three phase capability with automatic or manual three phase coupling networks. The CDN2000A-06-32 and CDN2000-06-32, can be used for EFT, CWG surge and ring wave. Coupling path selection is either automatic under software control, or manual on the CDN front panel. All coupling networks fulfill the requirements laid down in the IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-12 (ring wave) and ANSI C62.41 standards.

| Single Phase Solutions | | Three Phase Solutions | |
|------------------------|-------------------------------|--|------------------------------------|
| Generator | Internal CDN | Generator | External CDN |
| TRA2000 | 280V L/N- PE L to N 280V | CDN2000A-06-32 or CDN2000-06-25 or CDN2000-06-32 | 280V Lx/N to PE 415V Lx - LX/N |
| TRA2000 | 280V L/N- PE L to N 280V | CDN2000A-06-32 Option 480V | 280V Lx/N to PE 480V Lx - LX/N |
| TRA2000IN4 | 280V L/N- PE L to N 280V | CDN2000A-06-32 or CDN2000-06-25 or CDN2000-06-32 | 280V Lx/N to PE 415V Lx - LX/N |
| TRA2000IN4 | 280V L/N- PE L to N 280V | CDN2000A-06-32 Option 480V | 280V Lx/N to PE 480V Lx - LX/N |
| TRA2000IN6 | 280V L/N- PE L to N 280V | CDN2000A-06-32 or CDN2000-06-25 or CDN2000-06-32 | 280V Lx/N to PE 415V Lx - LX/N |
| TRA2000IN6 | 280 V L/N- PE L to N 280 V | CDN2000A-06-32 Option 480V | 280V Lx/N to PE 480V Lx - LX/N |
| TRA2000IN6 | 280V L/N- PE L to N 280V | CDN2000A-06-32 ¹⁾ or CDN2000-06-25 or CDN2000-06-32 | 280 V Lx/N to PE 415V Lx - LX/N |

¹⁾ OPTION 480V / CMC extends the TRA2000IN6 for L1+L2+L3+N to PE (ANSI C62.45).

CN2000TT-MC

Two test pistols for direct current injection of surge and 10/700µs according to IEC 61000-4-5. Cable length 1.5m with MC plugs. The test pistols can be used together with MIG system equipped with MC plug outputs on front panel or networks (NW).



CN2000TT-MC with TRA2000

CN16-450C

Single phase CDN for superimposing surge and EFT into power lines. EUT power supply up to 16A at 115V 400Hz.



CN16-450C

ESD2000

ESD discharge network to fulfill IEC 61000-4-2 requirements. For full details, please refer to brochure "ESD Testers".



ESD2000

CN-EFT1000

Capacitive coupling clamp 100ohm according to IEC 61000-4-4 including 1m coax cable with BNC connectors.



CN-EFT1000

VERI50EFT

50ohm termination with high voltage BNC connector and integrated divider for EFT calibration / verification in accordance with IEC 61000-4-4 Ed2.



VERI50EFT

VERI1KEFT

1kOhm termination with high voltage BNC connector and integrated divider for EFT calibration / verification in accordance with IEC 61000-4-4 Ed2.



VERI1KEFT


CN-BALUN

Balanced/unbalanced transmission line transformer for EFT and 1MHz damped sine according to ANSI/IEEE C.37.90. Including coaxial cable with HV-BNC plugs (3x 0.5m), test tip + HV-BNC adapter (1 red, 1 black) and HV-BNC connector (2x).



CN-BALUN

Example of interrupt capability



CDN-UTP



CDN-KIT1000



OPTION NW-TRA-RAIL



VAR-EXT1000



VERI-DIPS



NW16S



TRA OPTION TEST 3.2

TRA2000 extension for special burst and dips/interrupts according to IEC 62052-11 and Indian standard 13779.

Three bursts of 1s duration within a 10 minute period.

Three interruptions lasting one second each with 50ms spacing, in accordance with IEC 62052-11 annex B.

ADAPTER EFT-CDN

Adapter cable which enables EFT impulses to be measured at the output of either a single or three phase CDN as required by IEC 61000-4-4 Ed.2.

CDN-UTP

The CDN-UTP is a sophisticated coupling and de-coupling network for superimposing surge impulses on balanced communication lines in accordance with IEC 61000-4-5 (Figure 12: unshielded symmetrical interconnection lines), ITU-K20, K21 and FCC part 68.

It is designed for 1.2/50 μ s and 10/700 μ s pulses up to 6.6kV.

CDN-UTP is also available with 4 pairs (8 lines) as the CDN-UTP8 version.

CDN-KIT1000

Surge coupling-decoupling network for data lines according to IEC 61000-4-5. Comprises one universal coupling module, one low frequency and one high frequency decoupling module.

NW-TRA-RAIL

Applicable standards are IEC 60571 Ed. 2.0b, EN 50155 and RIA12.

TRA2000 and option NW-TRA-RAIL fulfill the waveform A impulse requirement.

Waveform A: 5/50 μ s (1.8kV), Z_{out} 100ohm.

In combination with the ESD3000DM8 which generates the higher level waveform B impulse.

VAR-EXT1000

External 16A variac module extends the internal capability for higher powered EUTs.

VERI-DIPS

Measuring set for calibration/verification of the EUT inrush current.

NW16S

AC and DC voltage tests can be performed by adding the NW16S voltage source. Tests can then be performed for

- continuous mode (with 2 ranges up to 1V and up to 30V)
- short duration mode (1s up to 10V and up to 300V)

Two coupling networks are available: CN16 for powerlines and CN16T for telecom lines.

CN16 and CN16T

Coupling networks for power lines and telecom lines. Use with NW16S.



CN16

PFS32

PFS32 extends the system to provide three phase testing of AC and DC interrupts up to 480V and 32A. In accordance with IEC 61000-4-11 Ed2.



TRA2000 with PFS32 and SRC32

SRC32

SCRC32 is a 480V AC source controllable from the TRA2000 to generate dips at the fixed levels required in IEC 61000-4-11 Ed2 (0%, 40%, 70%, 80%). Dips can be synchronised to any phase and any angle.

DIPS100E

100ohm non-inductive resistor for calibration of dips/interrupts switching times.



DIPS100E

MF1000-1, MF1000-2 and MF1000-3

Applicable standards are IEC 61000-4-8 for a.c. and IEC 61000-4-9 for impulse magnetic fields.

| Antenna | Coil dimensions | AC magnetic fields (50/60Hz) | Impulse magnetic fields (8/20µs) |
|----------|-----------------|------------------------------|----------------------------------|
| MF1000-1 | 1m x 1m | 1 up to 130A/m | 0.1 up to 1.5kA/m |
| MF1000-2 | 1m x 2.6m | 1 up to 110A/m | 0.1 up to 1.1kA/m |
| MF1000-3 | 1m x 1m | 0.3 up to 1kA/m | |



MF1000-1
MF1000-2
MF1000-3

CN-K44PCPI

Coupling network for power conduct and power induction test. In accordance with ITU-T-K.44.



CN-K44PCPI

PS3-1

Low cost power supply. Selection possibilities: 230V/50Hz and 115V/60Hz.



PS3-1

Remote control from a PC requires the OPTICAL LINK and one of the following software packages:

- GENECS is a relatively simple program that reproduces generator front panel functions on a PC. In addition to remote programming and control of the generators, test report information is available to word processing or other evaluation programs such as EXCEL. GENCES is supplied with each instrument or downloaded free of charge from the EMC PARTNER website. Firmware can be updated using the serial link provided.
- TEMA Software: Comfortable control of EMC PARTNER generators from a PC. Includes also control for ESD3000 and MIG2000 systems. Generates an enhanced level of test report.

Predefined test routines

The screenshot displays the EMC PARTNER software interface. The main window is titled "Surge Testing requirements per IEC 61000-4-5". It shows a table of test routines and a detailed view of a specific test routine.

Surge Testing requirements per IEC 61000-4-5

Vehicle: 2163300, based on 61000-4-5 (C3D)

EMC Partner Generator - [Description](#)

Content

2. Exposure Classes

3. Test Levels, Combination with:

- 3.1. CWS: Power supply
- 3.2. CWS: Unbalanced separated datelines, USB (USB = long distance bus)
- 3.3. CWS: Balanced separated datelines
- 3.4. CWS: USB and SW (SW = short distance bus)

4. Test Levels, 10³0us (for ports of long distance)

- 4.1. 10³0us - Balanced separated datelines

1. General

The Basic EMC Standards for Surge define the methods of detail to produce comparable results between test sites.

While the Basic EMC Standard specifies how to perform the IEC 61000-4-5 also includes climatic specifications as follows:

- Ambient temperature: 10°C to 20°C
- Relative Humidity: 10% to 75%
- Atmospheric Pressure: 86kPa (860 mbars) to 106kPa

Other values may be specified in the test specification.

The surge test can be described to the IEC 4 categories per:

2. Exposure Classes

The test level is set by the Surge test form (S) as a level:

| Class | Description |
|-------|--|
| 0 | Not specified |
| 1 | Partly protected electrical equipment |
| 2 | Electrical equipment where cables are well supported, even at short runs |

The detailed view of a test routine shows:

IEC 1000-4-5: Surge on balanced datelines -- Line to Earth -- Class 5

10:38:27 01/05 EMC PARTNER AG, 4312 Castron, Switzerland
Operator: R. Calvino
Function: LEB
Test Site: Agilent + 3000 + 1 km

The routine includes four test levels (1, 2, 3, 4) with associated waveforms and parameters:

- 1. CWS on balanced datelines -- Line to Earth -- 400V
Load time: 0.4s (0.000)
Spikes per and req. every 20 seconds: 300 (3000)
Result: Test passed
- 2. CWS on balanced datelines -- Line to Earth -- 100V
Load time: 0.4s (0.000)
Spikes per and req. every 20 seconds: 300 (3000)
Result: Test passed
- 3. CWS on balanced datelines -- Line to Earth -- 100V
Load time: 0.4s (0.000)
Spikes per and req. every 20 seconds: 300 (3000)
Result: Test passed
- 4. CWS on balanced datelines -- Line to Earth -- 100V
Load time: 0.4s (0.000)
Spikes per and req. every 20 seconds: 300 (3000)
Result: Test passed

EMC PARTNER's Product Range

The Largest Range of Impulse Test Equipment up to 100kA and 100kV.

Immunity Tests

Transient Test System performs all of the following tests on electronic equipment as required for the CE-mark up to full levels: ESD, EFT, surge, dips, a.c. magnetic field, surge magnetic field and common mode tests. A large range of accessories for different applications is available: MF antennas, three phase couplers, verification sets, coupling kits, etc. The Transient Test System complies with IEC 61000-4-2, -4, -5, -8, -9, -11, -12p, -16, -29p.

TRA2000, ESD3000 and CDN2000A-06-32 – a complete automatic three-phase test system



Lightning Tests

EMC PARTNER offers a wide range of testers in accordance with national and international standards. These include FCC 68 part D, ITU K.44, ETS 300 046, Bellcore GR1089 for telecom, RTCA DO160D for aircraft and MIL-STD-461E for military electronic equipment testing.

MIG0600MS and MIG-OS-MB – a multiple stroke and multiple burst aircraft test system



Component Tests

EMC PARTNER offers a wide range of modular impulse generators (MIG) for transient component testing on: varistors, arresters, surge protective devices (SPD), capacitors, circuit breakers, watt-hour meters, protection relays, insulation material, suppressor diodes, connectors, chokes, fuses, resistors, emc-gaskets, cables, etc.

MIG1212CAP – an automatic 8 bank capacitor test system



Emission Measurements

One unit performs all measurements on the power supplies of electronic equipment and products for the CE-Mark.

The HAR1000 includes an amplifier for a clean power source, a line impedance network, the measurement systems Harmonics and Flicker. Accessories: three phase extension and HARCS Immunity software. Complies with IEC/EN 61000-3-2 and -3.

HAR1000-3P and HARCS Software – a complete three-phase harmonics and flicker test system



For further information please do not hesitate to contact EMC PARTNER's representative in your region. You will find a complete list of our representatives and a lot of other useful information on our website:

www.emc-partner.com

The Headquarters in Switzerland

EMC PARTNER AG
Baselstrasse 160
CH - 4242 Laufen
Switzerland

Phone: +41 61 763 01 11
Fax: +41 61 763 01 15
Email: sales@emc-partner.ch
Web-Site: www.emc-partner.com

Your local representative

