





Specifications

Model	PA-010	PA-103
Frequency	100 Hz - 30 MHz	1 MHz - 1000 MHz
Gain	39 dB	32 dB
Flatness	± 3 dB	± 2 dB
3 dB Bandwidth	20 Hz, 40 MHz	500 kHz, 1200 MHz
Noise Figure	< 7 dB	< 6 dB
P1dB	+13 dBm	+4 dBm
VSWR	1.3:1	1.3:1
Reverse Isolation	>30 dB	>30 dB
Impedance	50 Ohms	50 Ohms
Temperature Range	0° - 40° C	0° - 40° C
Max. DC Input	2 VDC, 0 dBm	2 VDC, 0 dBm
Connector Type	BNC (f)	BNC (f)
Input Power	120 VAC, 60 Hz	9 VAC, 1 Amp
Dimensions (L x W x H)	7.5" x 5" x 3" (19 x13 x 7.6 cm)	7.5" x 5" x 3" (9 x13 x 7.6 cm)
Weight	3.3 lbs. (1.5 kg)	2.5 lbs (1.1 kg)

Typical Gain model PA-010

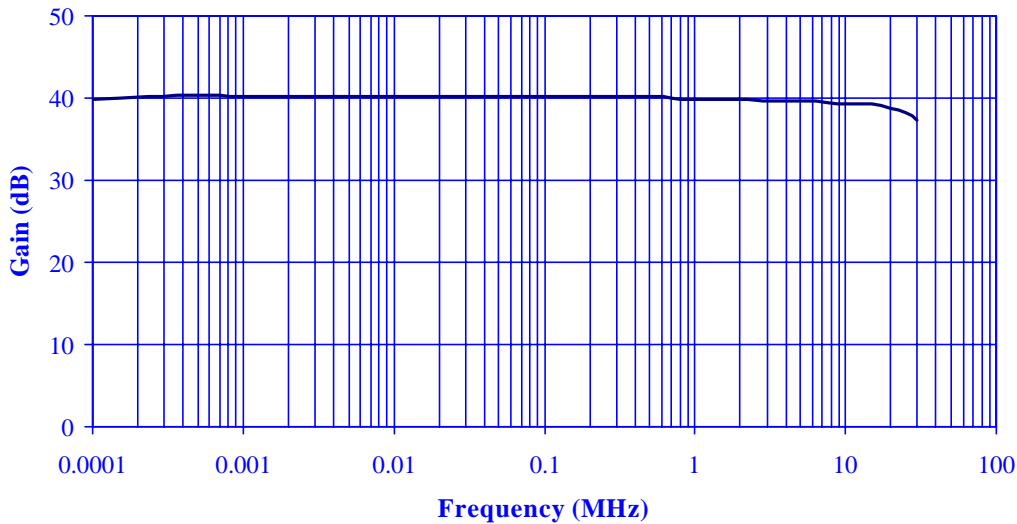

Typical Gain model PA-103

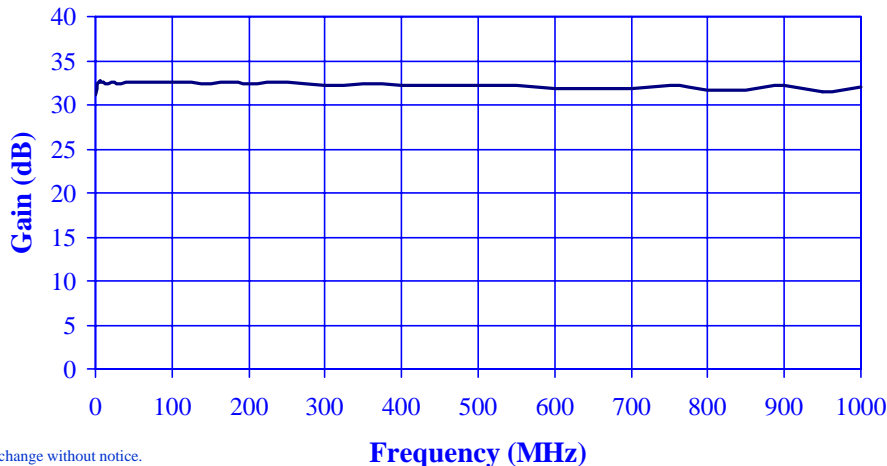

All specifications are subject to change without notice.
 All values are typical, unless specified.