



**Advanced Test Equipment Rentals**  
[www.atecorp.com](http://www.atecorp.com) 800-404-ATEC (2832)

# R&S®ESR EMI Test Receiver Specifications



 ROHDE & SCHWARZ

## CONTENTS

<b>Definitions .....</b>	<b>3</b>
<b>Specifications.....</b>	<b>4</b>
Frequency .....	4
Preselection and preamplifier .....	6
IF and resolution bandwidths.....	7
Level.....	7
Measurement speed.....	16
Trigger functions.....	16
Audio demodulation.....	17
Inputs and outputs .....	17
General data.....	19
<b>Options .....</b>	<b>20</b>
R&S®FSV-B9 tracking generator (spectrum analyzer mode).....	20
R&S®FSV-B30 DC power supply for 12 V supply voltage .....	21
R&S®FSV-B32 Lithium-ion battery pack.....	21
R&S®FSV-B34 charger for R&S®FSV-B32 Lithium-ion battery pack.....	21
R&S®ESR-K55 real-time spectrum analyzer mode .....	22
<i>Level</i> .....	23
<i>Result display</i> .....	23
<i>Trigger</i> .....	24
R&S®ESR-K56 IF analysis.....	25
<b>Ordering information .....</b>	<b>26</b>
Options.....	26
Upgrade Kits .....	26
Recommended extras.....	27

# Definitions


## General

Product data applies under the following conditions:

- Three hours storage at ambient temperature followed by 30 minutes warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

## Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as  $<$ ,  $\leq$ ,  $>$ ,  $\geq$ ,  $\pm$ , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

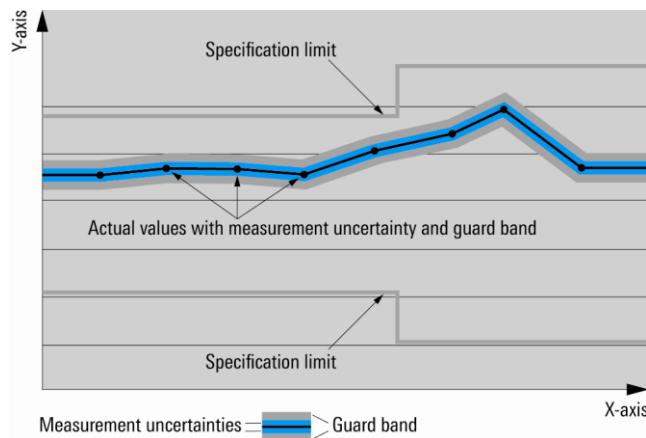

## Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

## Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with  $<$ ,  $>$  or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

## Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

## Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

## Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are designated with the format "parameter: value".

Typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

# Specifications

Operating modes		EMI test receiver
		spectrum analyzer
	with R&S®ESR-K55 option	real-time spectrum analyzer

## Frequency

<b>Frequency range</b>	R&S®ESR3		
	input 1, AC coupled	10 MHz to 3.6 GHz	
	input 1, DC coupled	9 kHz to 3.6 GHz	
	input 2, DC coupled	9 kHz to 1 GHz	
	<b>R&amp;S®ESR7</b>		
	input 1, AC coupled	10 MHz to 7 GHz	
	input 1, DC coupled	9 kHz to 7 GHz	
	input 2, DC coupled	9 kHz to 1 GHz	
	<b>R&amp;S®ESR26</b>		
	input 1, AC coupled	10 MHz to 26.5 GHz	
<b>Frequency resolution</b>	input 1, DC coupled	9 kHz to 26.5 GHz	
	input 2, DC coupled	9 kHz to 1 GHz	
	with R&S®ESR-B29 option, DC coupled	10 Hz to max. frequency	
	receiver mode	0.1 Hz	
	analyzer mode	0.01 Hz	

<b>Reference frequency, internal</b>		
Accuracy		$\pm((\text{time since last adjustment} \times \text{aging rate}) + \text{temperature drift} + \text{calibration accuracy})$
Aging per year	standard	$\pm 1 \times 10^{-6}$
	with R&S®FSV-B4 option	$\pm 1 \times 10^{-7}$
Temperature drift (+5 °C to +45 °C)	standard	$\pm 1 \times 10^{-6}$
	with R&S®FSV-B4 option, model .02	$\pm 1 \times 10^{-7}$
	with R&S®FSV-B4 option, model .03	$\pm 1 \times 10^{-8}$
Max. initial calibration accuracy	standard	$\pm 5 \times 10^{-7}$
	with R&S®FSV-B4 option	$\pm 5 \times 10^{-8}$


<b>Frequency readout (analyzer mode)</b>		
Marker resolution		1 Hz
Uncertainty		$\pm(\text{marker frequency} \times \text{reference accuracy} + 10\% \times \text{resolution bandwidth} + \frac{1}{2} (\text{span}/(\text{sweep points} - 1)) + 1 \text{ Hz})$
Number of sweep (trace) points	default value	691
	range	
	spectrum analyzer	101 to 32 001
Marker tuning frequency step size	EMI measurement	101 to 200 001
	marker step size = sweep points	span/(sweep points - 1)
	marker step size = standard	span/(default sweep points - 1)
Frequency counter resolution		0.001 Hz
Count accuracy		$\pm(\text{frequency} \times \text{reference accuracy} + \frac{1}{2} (\text{last digit}))$
Display range for frequency axis		0 Hz, 10 Hz to max. frequency
Resolution		0.1 Hz
Max. span deviation		$\pm 0.1 \%$

<b>Receiver scan</b>		
Scan		max. 10 subranges with different settings
Scan modes		normal, time domain <sup>1</sup>
Measurement time	normal scan, per frequency	50 µs to 100 s
	time domain scan, per subrange <sup>1</sup>	50 µs to 100 s
Number of trace points		up to 4 000 000
Frequency step size	normal scan	min. 1 Hz
	time domain scan <sup>1</sup>	0.25 × resolution bandwidth
<b>Time domain scan<sup>1</sup></b>		
Frequency segment processed in parallel	f < 7 GHz	
	RBW = 200 Hz	0.66 MHz
	RBW = 9 kHz	30 MHz
	RBW = 120 kHz	24.6 MHz
	RBW = 1 MHz	25.6 MHz
	f ≥ 7 GHz	
	RBW = 200 Hz	0.66 MHz
	RBW ≥ 9 kHz	10 MHz
FFT overlap factor		≥ 93 %

<b>Spectrum analyzer</b>		
Sweep time range	span = 0 Hz	1 µs to 16 000 s
	span ≥ 10 Hz, swept	1 ms to 16 000 s <sup>2</sup>
	span ≥ 10 Hz, FFT	7 µs to 16 000 s <sup>3</sup>
Sweep time accuracy	span = 0 Hz	±0.1 % (nom.)
	span ≥ 10 Hz, swept	±3 % (nom.)

<b>Spectral purity</b>		
SSB phase noise	frequency = 500 MHz, carrier offset	
	100 Hz	< -84 dBc (1 Hz)
	1 kHz	< -101 dBc (1 Hz)
	10 kHz	< -106 dBc (1 Hz)
	100 kHz	< -115 dBc (1 Hz)
	1 MHz	< -134 dBc (1 Hz)
	10 MHz	< -150 dBc (1 Hz) (nom.)
Residual FM	frequency = 500 MHz, RBW = 1 kHz, sweep time = 100 ms	< 3 Hz (nom.)

<sup>1</sup> Requires R&S®ESR-K53 option.<sup>2</sup> Net sweep time without additional hardware settling time.<sup>3</sup> Data acquisition time for FFT calculation.

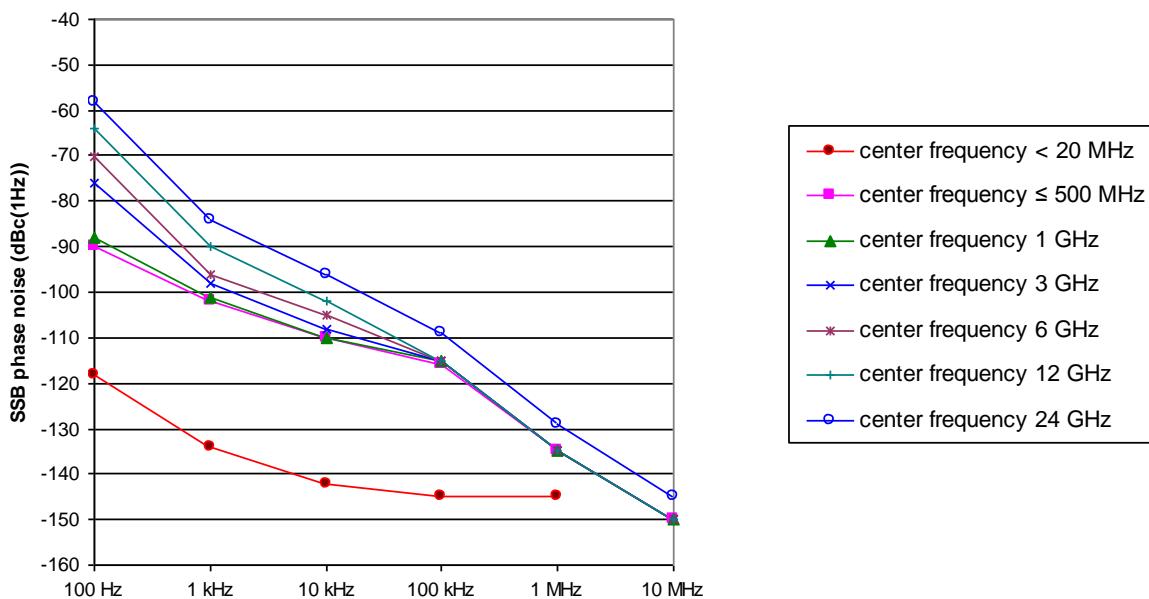

Typical phase noise at different center frequencies.

## Preselection and preamplifier

Preselection		
State	receiver mode analyzer mode	always on on/off (selectable)
Number of preselection filters		16
Bandwidths (–6 dB), nominal	10 Hz to 150 kHz 150 kHz to 30 MHz 30 MHz to 80 MHz 80 MHz to 130 MHz 130 MHz to 180 MHz 180 MHz to 230 MHz 230 MHz to 300 MHz 300 MHz to 425 MHz 425 MHz to 570 MHz 570 MHz to 715 MHz 715 MHz to 860 MHz 860 MHz to 1005 MHz 1005 MHz to 1750 MHz 1750 MHz to 2850 MHz 2850 MHz to 4850 MHz 4850 MHz to 7000 MHz 7 GHz to 26.5 GHz	fixed lowpass filter 35 MHz, fixed bandpass filter 94 MHz, fixed bandpass filter 94 MHz, fixed bandpass filter 91 MHz, fixed bandpass filter 105 MHz, fixed bandpass filter 110 MHz, fixed bandpass filter 195 MHz, fixed bandpass filter 200 MHz, fixed bandpass filter 210 MHz, fixed bandpass filter 200 MHz, fixed bandpass filter 200 MHz, fixed bandpass filter fixed highpass filter fixed highpass filter fixed highpass filter fixed highpass filter YIG filter
Preamplifier		
Location	1 kHz to 7 GHz 7 GHz to 26.5 GHz	in the signal path between preselection and 1st mixer in the signal path between diplexer and preselection
Range		1 kHz to 26.5 GHz
Gain	1 kHz to 7 GHz 7 GHz to 26.5 GHz	20 dB (nom.) 30 dB (nom.)

## IF and resolution bandwidths

<b>IF and sweep filters</b>		
Resolution bandwidths ( $-3 \text{ dB}$ )	receiver mode or analyzer mode, span $\geq 10 \text{ Hz}$	10 Hz to 10 MHz in 1/2/3/5 sequence
	analyzer mode, span = 0 Hz	20 MHz, 28 MHz additionally
	analyzer mode, span = 0 Hz, $f \leq 7 \text{ GHz}$	40 MHz additionally
Bandwidth uncertainty		< 3 %
Shape factor 60 dB:3 dB		< 5
EMI bandwidths ( $-6 \text{ dB}$ )	standard	200 Hz, 9 kHz, 120 kHz, 1 MHz
	with R&S®ESR-B29 option	10 Hz, 100 Hz, 1 kHz, 10 kHz, 100 kHz additionally
Bandwidth uncertainty		< 3 %
Shape factor 60 dB:6 dB		< 4

<b>FFT filters (analyzer mode)</b>		
Resolution bandwidths ( $-3 \text{ dB}$ )	span $\geq 10 \text{ Hz}$	10 Hz to 300 kHz in 1/2/3/5 sequence
Bandwidth uncertainty		< 3 % (nom.)
Shape factor 60 dB:3 dB		< 5 (nom.)

<b>Channel filters (analyzer mode)</b>		
Bandwidths ( $-3 \text{ dB}$ )	standard (RRC = root raised cosine)	100/200/300/500 Hz 1/1.5/2/2.4/2.7/3/3.4/4/4.5/5/6/8.5/9/10/ 12.5/14/15/16/18 (RRC)/20/21/24.3 (RRC) /25/30/50/100/150/192/200/300/500 kHz 1/1.228/1.28 (RRC)/1.5/2/3/3.84 (RRC)/ 4.096 (RRC)/5/10/20/28
	$f \leq 7 \text{ GHz}$	40 MHz additionally
Bandwidth accuracy		< 2 % (nom.)
Shape factor 60 dB:3 dB		< 2 (nom.)

<b>Video bandwidths (analyzer mode)</b>		1 Hz to 10 MHz in 1/2/3/5 sequence, 20 MHz, 28 MHz
	$f \leq 7 \text{ GHz}$	40 MHz additionally

## Level

Display range		displayed noise floor up to +30 dBm
---------------	--	-------------------------------------

<b>Max. input level</b>		
DC voltage	input 1	
	AC coupled	50 V
	DC coupled	0 V
	input 2	0 V
CW RF power	RF attenuation = 0 dB	
	RF preamplifier = off	20 dBm (= 0.1 W)
	RF preamplifier = on	13 dBm (= 0.02 W)
	RF attenuation $\geq 10 \text{ dB}$	
	RF preamplifier = off	30 dBm (= 1 W)
	RF preamplifier = on	23 dBm (= 0.2 W)
Pulse spectral density	RF attenuation = 0 dB, preselection = on <sup>4</sup> , RF preamplifier = off	97 dB $\mu\text{V}/\text{MHz}$
Max. pulse voltage	RF attenuation $\geq 10 \text{ dB}$	
	input 1	150 V
	input 2	450 V
Max. pulse energy	RF attenuation $\geq 10 \text{ dB}, 10 \mu\text{s}$	
	input 1	1 mWs
	input 2	20 mWs

<sup>4</sup> Default setting in receiver mode.

<b>Intermodulation</b>		
1 dB compression of input mixer	RF attenuation = 0 dB, preselection and preamplifier = off <sup>5</sup>	
	$f \leq 7 \text{ GHz}$	+3 dBm (nom.)
	$f > 7 \text{ GHz}$	+5 dBm (nom.)
Third-order intercept point (TOI)	RF attenuation = 0 dB, level = $2 \times -15 \text{ dBm}$ , $\Delta f > 5 \times \text{RBW}$ or 10 kHz, whichever is larger, preselection = off <sup>5</sup> , with R&S®FSV-B22 option: RF preamplifier = off	
	$10 \text{ MHz} \leq f_{\text{in}} < 100 \text{ MHz}$	> 12 dBm, 15 dBm (typ.)
	$100 \text{ MHz} \leq f_{\text{in}} < 3.6 \text{ GHz}$	> 13 dBm, 16 dBm (typ.)
	$3.6 \text{ GHz} \leq f_{\text{in}} \leq 26.5 \text{ GHz}$	> 15 dBm, 18 dBm (typ.)
	preselection = on <sup>6</sup> , preamplifier = off,	
	RF attenuation = 0 dB, level = $2 \times -20 \text{ dBm}$ , $\Delta f > 5 \times \text{RBW}$ or 10 kHz, whichever is larger	
	$10 \text{ MHz} \leq f_{\text{in}} < 100 \text{ MHz}$	> 5 dBm, 8 dBm (typ.)
	$100 \text{ MHz} \leq f_{\text{in}} < 4.5 \text{ GHz}$	> 8 dBm, 11 dBm (typ.)
	$4.5 \text{ GHz} \leq f_{\text{in}} \leq 7 \text{ GHz}$	> 5 dBm, 8 dBm (typ.)
	$7 \text{ GHz} \leq f_{\text{in}} \leq 26.5 \text{ GHz}$	> 15 dBm, 18 dBm (typ.)
	preselection = on <sup>6</sup> , preamplifier = on,	
	RF attenuation = 0 dB, level = $2 \times -45 \text{ dBm}$ , $\Delta f > 5 \times \text{RBW}$ or 10 kHz, whichever is larger	
	$10 \text{ MHz} \leq f_{\text{in}} < 100 \text{ MHz}$	> -16 dBm, -13 dBm (typ.)
	$100 \text{ MHz} \leq f_{\text{in}} < 3.6 \text{ GHz}$	> -14 dBm, -11 dBm (typ.)
	$3.6 \text{ GHz} \leq f_{\text{in}} \leq 7 \text{ GHz}$	> -10 dBm, -7 dBm (typ.)
	$7 \text{ GHz} \leq f_{\text{in}} \leq 26.5 \text{ GHz}$	-10 dBm (nom.)
	with R&S®FSV-B22 option, preselection = off <sup>5</sup> , RF preamplifier = on,	
	RF attenuation = 0 dB, level = $2 \times -45 \text{ dBm}$ , $\Delta f > 5 \times \text{RBW}$ or 10 kHz, whichever is larger	
	$10 \text{ MHz} \leq f_{\text{in}} < 100 \text{ MHz}$	-3 dBm (nom.)
	$100 \text{ MHz} \leq f_{\text{in}} < 3.6 \text{ GHz}$	-2 dBm (nom.)
	$3.6 \text{ GHz} \leq f_{\text{in}} \leq 7 \text{ GHz}$	0 dBm (nom.)
	$7 \text{ GHz} \leq f_{\text{in}} \leq 26.5 \text{ GHz}$	-10 dBm (nom.)
Second-harmonic intercept (SHI)	RF attenuation = 0 dB, level = -10 dBm, preselection = off <sup>5</sup> , with R&S®FSV-B22 option: RF preamplifier = off	
	$100 \text{ MHz} < f_{\text{in}} \leq 3.5 \text{ GHz}$	45 dBm (nom.)
	$3.5 \text{ GHz} < f_{\text{in}} \leq 13.25 \text{ GHz}$	75 dBm (nom.)
	RF attenuation = 0 dB, level = -15 dBm, preselection = on <sup>6</sup> , preamplifier = off	
	$100 \text{ MHz} < f_{\text{in}} \leq 3.5 \text{ GHz}$	50 dBm (nom.)
	$3.5 \text{ GHz} < f_{\text{in}} \leq 13.25 \text{ GHz}$	75 dBm (nom.)
	RF attenuation = 0 dB, level = -10 dBm, preselection = on <sup>6</sup> , preamplifier = on	
	$100 \text{ MHz} < f_{\text{in}} \leq 3.5 \text{ GHz}$	35 dBm (nom.)
	$3.5 \text{ GHz} < f_{\text{in}} \leq 13.25 \text{ GHz}$	10 dBm (nom.)
	with R&S®FSV-B22 option, preselection = off <sup>5</sup> , RF preamplifier = on, RF attenuation = 0 dB, level = -40 dBm	
	$100 \text{ MHz} < f_{\text{in}} \leq 3.5 \text{ GHz}$	25 dBm (nom.)
	$3.5 \text{ GHz} < f_{\text{in}} \leq 13.25 \text{ GHz}$	10 dBm (nom.)

<sup>5</sup> Preselection = off is only available in analyzer mode. In receiver mode the preselection is permanently on.<sup>6</sup> Default setting in receiver mode.

<b>Displayed average noise level (analyzer mode)</b>	
	RF attenuation = 0 dB, preselection = off/on, preamplifier = off, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time = 50 ms, sample detector, trace average, sweep count = 20, mean marker
R&S®ESR3, R&S®ESR7	
9 kHz ≤ f < 100 kHz	< -130 dBm, -140 dBm (typ.)
100 kHz ≤ f < 1 MHz	< -145 dBm, -150 dBm (typ.)
1 MHz ≤ f < 1 GHz	< -152 dBm, -155 dBm (typ.)
1 GHz ≤ f < 3.6 GHz	< -150 dBm, -151 dBm (typ.)
3.6 GHz ≤ f < 6 GHz	< -148 dBm, -151 dBm (typ.)
6 GHz ≤ f ≤ 7 GHz	< -146 dBm, -149 dBm (typ.)
R&S®ESR26	
9 kHz ≤ f < 100 kHz	< -130 dBm, -140 dBm (typ.)
100 kHz ≤ f < 1 MHz	< -145 dBm, -150 dBm (typ.)
1 MHz ≤ f < 1 GHz	< -150 dBm, -153 dBm (typ.)
1 GHz ≤ f < 3.6 GHz	< -147 dBm, -150 dBm (typ.)
3.6 GHz ≤ f < 6 GHz	< -144 dBm, -147 dBm (typ.)
6 GHz ≤ f < 7.4 GHz	< -141 dBm, -144 dBm (typ.)
7.4 GHz ≤ f < 13.6 GHz	< -145 dBm, -148 dBm (typ.)
13.6 GHz ≤ f < 15 GHz	< -143 dBm, -146 dBm (typ.)
15 GHz ≤ f ≤ 26.5 GHz	< -141 dBm, -144 dBm (typ.)
with R&S®ESR-B29 option, RF attenuation = 0 dB, preselection = off/on, preamplifier = off, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 10 Hz, VBW = 10 Hz, zero span, sweep time = 500 ms, sample detector, trace average, sweep count = 20, mean marker	
R&S®ESR3, R&S®ESR7, R&S®ESR26	
10 Hz	< -90 dBm, -100 dBm (typ.)
20 Hz	< -100 dBm, -110 dBm (typ.)
100 Hz	< -110 dBm, -120 dBm (typ.)
1 kHz	< -120 dBm, -130 dBm (typ.)
RF attenuation = 0 dB, preselection = on, preamplifier = on, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time = 50 ms, sample detector, trace average, sweep count = 20, mean marker	
R&S®ESR3, R&S®ESR7	
9 kHz ≤ f < 100 kHz	< -150 dBm, -155 dBm (typ.)
100 kHz ≤ f < 1 MHz	< -155 dBm, -160 dBm (typ.)
1 MHz ≤ f < 1 GHz	< -165 dBm, -168 dBm (typ.)
1 GHz ≤ f < 3.6 GHz	< -162 dBm, -165 dBm (typ.)
3.6 GHz ≤ f < 6 GHz	< -160 dBm, -163 dBm (typ.)
6 GHz ≤ f ≤ 7 GHz	< -158 dBm, -161 dBm (typ.)
R&S®ESR26	
9 kHz ≤ f < 150 kHz	< -150 dBm, -155 dBm (typ.)
150 kHz ≤ f < 2 MHz	< -155 dBm, -160 dBm (typ.)
2 MHz ≤ f < 1 GHz	< -161 dBm, -164 dBm (typ.)
1 GHz ≤ f < 3.6 GHz	< -158 dBm, -161 dBm (typ.)
3.6 GHz ≤ f < 6 GHz	< -156 dBm, -159 dBm (typ.)
6 GHz ≤ f < 7.4 GHz	< -154 dBm, -157 dBm (typ.)
7.4 GHz ≤ f < 13.6 GHz	< -164 dBm, -167 dBm (typ.)
13.6 GHz ≤ f < 26.5 GHz	< -157 dBm, -160 dBm (typ.)
with R&S®ESR-B29 option, RF attenuation = 0 dB, preselection = on, preamplifier = on, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 10 Hz, VBW = 5 Hz, zero span, sweep time = 500 ms, sample detector, trace average, sweep count = 20, mean marker	
R&S®ESR3, R&S®ESR7	
1 kHz	< -140 dBm, -150 dBm (typ.)
R&S®ESR26	
1 kHz	< -130 dBm, -140 dBm (typ.)

	with R&S®FSV-B22 option, RF attenuation = 0 dB, preselection = off, RF preamplifier = on, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time = 50 ms, sample detector, trace average, sweep count = 20, mean marker
R&S®ESR3, R&S®ESR7	
100 kHz ≤ f < 1 MHz	< -150 dBm, -155 dBm (typ.)
1 MHz ≤ f < 1 GHz	< -162 dBm, -165 dBm (typ.)
1 GHz ≤ f < 3.6 GHz	< -160 dBm, -163 dBm (typ.)
3.6 GHz ≤ f < 6 GHz	< -158 dBm, -161 dBm (typ.)
6 GHz ≤ f ≤ 7 GHz	< -156 dBm, -159 dBm (typ.)
R&S®ESR26	
100 kHz ≤ f < 1 MHz	< -145 dBm, -148 dBm (typ.)
1 MHz ≤ f < 20 MHz	< -155 dBm, -158 dBm (typ.)
20 MHz ≤ f < 1 GHz	< -160 dBm, -163 dBm (typ.)
1 GHz ≤ f < 3.6 GHz	< -157 dBm, -160 dBm (typ.)
3.6 GHz ≤ f < 6 GHz	< -153 dBm, -156 dBm (typ.)
6 GHz ≤ f < 7.4 GHz	< -150 dBm, -153 dBm (typ.)
7.4 GHz ≤ f < 13.6 GHz	< -164 dBm, -167 dBm (typ.)
13.6 GHz ≤ f ≤ 26.5 GHz	< -157 dBm, -160 dBm (typ.)

**Noise indication (receiver mode), nominal, calculated from DANL data**

	RF attenuation = 0 dB, preamplifier = off, termination = 50 Ω, average detector (AV)
R&S®ESR3, R&S®ESR7	
9 kHz ≤ f < 100 kHz, BW = 200 Hz	< 0 dBµV
100 kHz ≤ f < 150 kHz, BW = 200 Hz	< -15 dBµV
150 kHz ≤ f < 1 MHz, BW = 9 kHz	< 2 dBµV
1 MHz ≤ f < 30 MHz, BW = 9 kHz	< -5 dBµV
30 MHz ≤ f < 1 GHz, BW = 120 kHz	< 6 dBµV
1 GHz ≤ f < 3.6 GHz, BW = 1 MHz	< 17 dBµV
3.6 GHz ≤ f < 6 GHz, BW = 1 MHz	< 19 dBµV
6 GHz ≤ f ≤ 7 GHz, BW = 1 MHz	< 21 dBµV
R&S®ESR26	
9 kHz ≤ f < 100 kHz, BW = 200 Hz	< 0 dBµV
100 kHz ≤ f < 150 kHz, BW = 200 Hz	< -15 dBµV
150 kHz ≤ f < 1 MHz, BW = 9 kHz	< 2 dBµV
1 MHz ≤ f < 30 MHz, BW = 9 kHz	< -3 dBµV
30 MHz ≤ f < 1 GHz, BW = 120 kHz	< 8 dBµV
1 GHz ≤ f < 3.6 GHz, BW = 1 MHz	< 20 dBµV
3.6 GHz ≤ f < 6 GHz, BW = 1 MHz	< 23 dBµV
6 GHz ≤ f < 7.4 GHz, BW = 1 MHz	< 26 dBµV
7.4 GHz ≤ f < 13.6 GHz, BW = 1 MHz	< 22 dBµV
13.6 GHz ≤ f < 15 GHz, BW = 1 MHz	< 24 dBµV
15 GHz ≤ f ≤ 26.5 GHz, BW = 1 MHz	< 26 dBµV
with R&S®ESR-B29 option,	
RF attenuation = 0 dB, preamplifier = off, termination = 50 Ω, average detector (AV)	
R&S®ESR3, R&S®ESR7, R&S®ESR26	
10 Hz, BW = 10 Hz	< 27 dBµV
20 Hz, BW = 10 Hz	< 17 dBµV
100 Hz, BW = 10 Hz	< 7 dBµV
1 kHz, BW = 100 Hz	< 7 dBµV
RF attenuation = 0 dB, preamplifier = on, termination = 50 Ω, average detector (AV)	
R&S®ESR3, R&S®ESR7	
9 kHz ≤ f < 100 kHz, BW = 200 Hz	< -20 dBµV
100 kHz ≤ f < 150 kHz, BW = 200 Hz	< -25 dBµV
150 kHz ≤ f < 1 MHz, BW = 9 kHz	< -8 dBµV
1 MHz ≤ f < 30 MHz, BW = 9 kHz	< -18 dBµV
30 MHz ≤ f < 1 GHz, BW = 120 kHz	< -7 dBµV
1 GHz ≤ f < 3.6 GHz, BW = 1 MHz	< 5 dBµV
3.6 GHz ≤ f < 6 GHz, BW = 1 MHz	< 7 dBµV
6 GHz ≤ f ≤ 7 GHz, BW = 1 MHz	< 9 dBµV
R&S®ESR26	
9 kHz ≤ f < 150 kHz, BW = 200 Hz	< -20 dBµV
150 kHz ≤ f < 2 MHz, BW = 9 kHz	< -8 dBµV
2 MHz ≤ f < 30 MHz, BW = 9 kHz	< -14 dBµV
30 MHz ≤ f < 1 GHz, BW = 120 kHz	< -3 dBµV
1 GHz ≤ f < 3.6 GHz, BW = 1 MHz	< 9 dBµV
3.6 GHz ≤ f < 6 GHz, BW = 1 MHz	< 11 dBµV
6 GHz ≤ f < 7.4 GHz, BW = 1 MHz	< 13 dBµV
7.4 GHz ≤ f < 13.6 GHz, BW = 1 MHz	< 3 dBµV
13.6 GHz ≤ f ≤ 26.5 GHz, BW = 1 MHz	< 10 dBµV
with R&S®ESR-B29 option,	
RF attenuation = 0 dB, preamplifier = on, termination = 50 Ω, average detector (AV)	
R&S®ESR3, R&S®ESR7	
1 kHz, BW = 100 Hz	< -13 dBµV
R&S®ESR26	
1 kHz, BW = 100 Hz	< -3 dBµV

<b>Spurious responses</b>		
Image response	30 MHz $\leq f \leq$ 7 GHz	
	$f_{in} - 2 \times 8409.9$ MHz (1st IF)	< -80 dBc (nom.)
	$f_{in} - 2 \times 729.9$ MHz (2nd IF)	< -80 dBc
	$f_{in} - 2 \times 89.9$ MHz (3rd IF)	< -80 dBc
	7 GHz $< f \leq$ 26.5 GHz	
	$f_{in} \pm 2 \times 729.9$ MHz (1st IF)	< -80 dBc
	$f_{in} - 2 \times 89.9$ MHz (2nd IF)	< -80 dBc
	30 MHz $\leq f \leq$ 7 GHz	
	1st IF (8409.9 MHz)	< -70 dBc (nom.)
	2nd IF (729.9 MHz)	< -80 dBc
Intermediate frequency response	3rd IF (89.9 MHz)	< -80 dBc
	7 GHz $< f \leq$ 26.5 GHz	
	1st IF (729.9 MHz)	< -80 dBc
	2nd IF (89.9 MHz)	< -80 dBc
	RF attenuation = 0 dB	
Residual spurious response	$f \leq 1$ MHz	< -90 dBm
	$f > 1$ MHz	< -103 dBm
Local oscillator related spurious	30 MHz $\leq f \leq$ 15 GHz	
	1 kHz $\leq$ offset from carrier $\leq$ 10 MHz	< -70 dBc
	offset from carrier $>$ 10 MHz	< -80 dBc
	15 GHz $\leq f <$ 26.5 GHz	
	1 kHz $\leq$ offset from carrier $\leq$ 10 MHz	< -64 dBc
Other interfering signals	offset from carrier $>$ 10 MHz	< -74 dBc
	Subharmonic of 1st LO	20 MHz $\leq f <$ 7 GHz, spurious at $8410$ MHz $- 2 \times f_{in}$
	Harmonic of 1st LO	mixer level $< -25$ dBm, spurious at $f_{in} - 4205$ MHz

<b>Level display (analyzer mode)</b>		
Logarithmic level axis		1 dB to 200 dB, in steps of 1/2/5
Linear level axis		10 % of reference level per level division, 10 divisions or logarithmic scaling
Number of traces		6
Trace detector		max. peak, min. peak, auto peak (normal), sample, RMS, average, quasi-peak, CISPR-average, RMS-average
Trace functions		clear/write, max. hold, min. hold, average, view
Setting range of reference level		-130 dBm to (-10 dBm + RF attenuation - RF preamplifier gain), in steps of 0.01 dB
Units of level axis	logarithmic level display linear level display	dBm, dBμV, dBmV, dBμA, dBpW μV, mV, μA, mA, pW, nW

<b>Level display (receiver mode)</b>		
Level display	analog	bargraph display, separately for each detector
	digital	numeric; 0.01 dB resolution
Detectors	max. 4 selectable	max. peak, min. peak, RMS, average, quasi-peak, CISPR-average, RMS-average
Units of level axis		dBm, dBμV, dBmV, dBμA, dBpW, dBpT
RF spectrum		
Logarithmic level axis		10 dB to 200 dB, in steps of 10
Frequency axis		linear or logarithmic
Number of traces		6
Detectors	normal scan	max. peak, min. peak, RMS, average, quasi-peak, CISPR-average, RMS-average
	time domain scan <sup>7</sup>	max. peak, min. peak, average, quasi-peak, CISPR-average, RMS-average

<b>Spectrogram display (analyzer mode)</b>		
Result display		color-graded bitmap
Spectrogram bitmap color depth		240 colors
Dynamic range covered by bitmap colors		selectable, up to 200 dB (nom.)
History depth		max. 100 000 frames
Recording mode		single trace, continuous, frame count
Trace detector		max. peak, min. peak, sample, RMS, average
Number of markers		16
Marker readout		frequency, time/frame number, level

<sup>7</sup> Requires R&S®ESR-K53 option.

<b>Level measurement uncertainty</b>	
Absolute level uncertainty at 64 MHz	RBW = 10 kHz, CW signal, level = -10 dBm, reference level = -10 dBm, RF attenuation = 10 dB +20 °C to +30 °C preselection = off <sup>8</sup> < 0.2 dB ( $\sigma = 0.07 \text{ dB}$ ) preselection = on <sup>9</sup> < 0.3 dB ( $\sigma = 0.1 \text{ dB}$ ) +5 °C to +40 °C preselection = off <sup>8</sup> < 0.35 dB ( $\sigma = 0.12 \text{ dB}$ ) preselection = on <sup>9</sup> < 0.45 dB ( $\sigma = 0.15 \text{ dB}$ )
Frequency response referenced to 64 MHz	DC coupling, RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, preselection = off <sup>8</sup> , with R&S®FSV-B22 option: RF preamplifier = off, +20 °C to +30 °C 9 kHz ≤ f < 10 MHz      < 0.5 dB ( $\sigma = 0.17 \text{ dB}$ ) 10 MHz ≤ f < 3.6 GHz      < 0.3 dB ( $\sigma = 0.1 \text{ dB}$ ) 3.6 GHz ≤ f ≤ 7 GHz      < 0.5 dB ( $\sigma = 0.17 \text{ dB}$ ) 7 GHz ≤ f < 13.6 GHz, span < 1 GHz      < 1.5 dB ( $\sigma = 0.5 \text{ dB}$ ) 13.6 GHz ≤ f ≤ 26.5 GHz, span < 1 GHz      < 2 dB ( $\sigma = 0.67 \text{ dB}$ ) DC coupling, RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, preselection = on <sup>9</sup> , preamplifier = on/off, +20 °C to +30 °C 9 kHz ≤ f < 3.6 GHz      < 0.6 dB ( $\sigma = 0.2 \text{ dB}$ ) 3.6 GHz ≤ f ≤ 7 GHz      < 0.8 dB ( $\sigma = 0.27 \text{ dB}$ ) 7 GHz ≤ f < 13.6 GHz, span < 1 GHz      < 1.5 dB ( $\sigma = 0.5 \text{ dB}$ ) 13.6 GHz ≤ f ≤ 26.5 GHz, span < 1 GHz      < 2 dB ( $\sigma = 0.67 \text{ dB}$ ) any setting for RF attenuation and preselection, preamplifier = off, +5 °C to +40 °C 9 kHz ≤ f < 3.6 GHz      < 1 dB ( $\sigma = 0.33 \text{ dB}$ ) 3.6 GHz ≤ f ≤ 7 GHz      < 1.5 dB ( $\sigma = 0.5 \text{ dB}$ ) 7 GHz ≤ f < 13.6 GHz      < 2.5 dB ( $\sigma = 0.83 \text{ dB}$ ) 13.6 GHz ≤ f ≤ 26.5 GHz      < 3 dB ( $\sigma = 1 \text{ dB}$ ) any setting for RF attenuation and preselection, preamplifier = on, +5 °C to +40 °C 9 kHz ≤ f < 3.6 GHz      < 1 dB ( $\sigma = 0.33 \text{ dB}$ ) 3.6 GHz ≤ f ≤ 7 GHz      < 1.5 dB ( $\sigma = 0.5 \text{ dB}$ ) 7 GHz ≤ f < 13.6 GHz      < 3 dB ( $\sigma = 1 \text{ dB}$ ) 13.6 GHz ≤ f ≤ 26.5 GHz      < 3.5 dB ( $\sigma = 1.17 \text{ dB}$ ) with R&S®ESR-B29 option, DC coupling, preamplifier = off, +5 °C to +40 °C 10 Hz ≤ f < 9 kHz      < 1 dB ( $\sigma = 0.33 \text{ dB}$ )
Attenuator switching uncertainty	f = 64 MHz, 0 dB to 70 dB, referenced to 10 dB attenuation      < 0.2 dB ( $\sigma = 0.07 \text{ dB}$ )
Uncertainty of reference level setting	0 dB <sup>10</sup> (nom.)
Bandwidth switching uncertainty	referenced to RBW = 10 kHz sweep filters      < 0.1 dB ( $\sigma = 0.03 \text{ dB}$ ) FFT filters      < 0.2 dB ( $\sigma = 0.07 \text{ dB}$ )
Quasi-peak display	in line with CISPR 16-1-1

<b>Nonlinearity of displayed level</b>	
Logarithmic level display	S/N > 16 dB 0 dB to -50 dB      < 0.1 dB ( $\sigma = 0.03 \text{ dB}$ ) -50 dB to -60 dB      < 0.15 dB ( $\sigma = 0.05 \text{ dB}$ ) -60 dB to -70 dB      < 0.2 dB ( $\sigma = 0.07 \text{ dB}$ )
Linear level display	S/N > 16 dB, 0 dB to -70 dB      < 5 % of reference level (nom.)

<sup>8</sup> Preselection = off is only available in analyzer mode. In receiver mode the preselection is permanently on.

<sup>9</sup> Default setting in receiver mode.

<sup>10</sup> The setting of the reference level affects only the graphical representation of the measurement result on the display, not the measurement itself. Therefore, the reference level setting causes no additional uncertainty in measurement results.

**Total measurement uncertainty**

	CW signal, level = 0 dB to –70 dB below reference level, S/N > 20 dB, sweep time = auto, sweep type = sweep, RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, preselection = off <sup>8</sup> , with R&S®FSV-B22 option: RF preamplifier = off, span/RBW < 100, 95 % confidence level, +20 °C to +30 °C
9 kHz ≤ f < 10 MHz	0.39 dB
10 MHz ≤ f < 3.6 GHz	0.29 dB
3.6 GHz ≤ f ≤ 7 GHz	0.39 dB
7 GHz ≤ f < 13.6 GHz	1 dB
13.6 GHz ≤ f ≤ 26.5 GHz	1.33 dB
	CW signal, level = 0 dB to –70 dB below reference level, S/N > 20 dB, sweep time = auto, sweep type = sweep, RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, preselection = on <sup>9</sup> , preamplifier = off /on, span/RBW < 100, 95 % confidence level, +20 °C to +30 °C
9 kHz ≤ f < 3.6 GHz	0.47 dB
3.6 GHz ≤ f ≤ 7 GHz	0.59 dB
7 GHz ≤ f < 13.6 GHz	1.01 dB
13.6 GHz ≤ f ≤ 26.5 GHz	1.34 dB

## Measurement speed

<b>Receiver mode</b>			
Time domain scan <sup>11</sup>	CISPR band B, 150 kHz to 30 MHz, RBW = 9 kHz, measurement time = 100 ms, peak detector	110 ms (meas.)	
	CISPR band B, 150 kHz to 30 MHz, RBW = 9 kHz, measurement time = 1 s, quasi-peak detector	2 s (meas.)	
	CISPR band C/D, 30 MHz to 1000 MHz, RBW = 120 kHz, measurement time = 10 ms, peak detector	520 ms (meas.)	
	CISPR band C/D, 30 MHz to 1000 MHz, RBW = 9 kHz, measurement time = 10 ms, peak detector	820 ms (meas.)	
	CISPR band C/D, 30 MHz to 1000 MHz, RBW = 120 kHz, measurement time = 1 s, quasi-peak detector	80 s (meas.)	
<b>Analyzer mode</b>			
Local measurement and display update rate		1.1 ms (900/s) (meas.)	
Remote measurement, 1000 sweep averages <sup>12</sup>		1 ms (1000/s) (meas.)	
Remote measurement and LAN transfer <sup>12</sup>		3 ms (333/s) (meas.)	
Marker peak search		1.5 ms (meas.)	
Center frequency tune and transfer <sup>12</sup>		15 ms (meas.)	

## Trigger functions

<b>Trigger</b>			
Trigger source	analyzer mode receiver mode	free run, video, external, IF power free run, video, external	
Trigger offset	analyzer mode, span $\geq$ 10 Hz analyzer mode, span = 0 Hz	31.25 ns to 30 s, min. resolution = 31.25 ns (or 1 % of offset) (-sweep time) to 30 s, min. resolution = 31.25 ns (or 1 % of offset)	
Max. deviation of trigger offset	analyzer mode	$\pm(7.8125 \text{ ns} + (0.1 \% \times \text{trigger offset}))$	
<b>IF power trigger (analyzer mode)</b>			
Sensitivity	min. signal power max. signal power	-60 dBm + RF attenuation – RF pre-amplifier gain (nom.) -10 dBm + RF attenuation – RF pre-amplifier gain (nom.)	
IF power trigger bandwidth	RBW > 500 kHz, swept RBW > 20 kHz, FFT RBW $\leq$ 500 kHz, swept RBW $\leq$ 20 kHz, FFT	40 MHz (nom.)  6 MHz (nom.)	
<b>Gated sweep (analyzer mode)</b>			
Gate source		video, external, IF power	
Gate delay		31.25 ns to 30 s, min. resolution = 31.25 ns (or 1 % of delay)	
Gate length		31.25 ns to 30 s, min. resolution = 31.25 ns (or 1 % of gate length)	
Max. deviation of gate length		$\pm(7.8125 \text{ ns} + (0.1 \% \times \text{gate length}))$	

<sup>11</sup> Requires R&S®ESR-K53 option.

<sup>12</sup> Measured with personal computer equipped with Intel Core2 Duo 2.13 GHz and Gbit LAN interface.

## Audio demodulation

AF demodulation types	AM and FM
Audio output	loudspeaker and phone jack
Marker stop time in spectrum mode	100 ms to 60 s

## Inputs and outputs

RF input		
Impedance		50 Ω
Connector	R&S®ESR3, R&S®ESR7	N female
	R&S®ESR26	test port adapter APC 3.5 mm/N female
VSWR	RF attenuation ≥ 10 dB, DC coupled	
	10 Hz ≤ f ≤ 1 GHz	< 1.2
	1 GHz < f < 3.6 GHz	< 1.5, 1.3 (typ.)
	3.6 GHz ≤ f < 20 GHz	< 2, 1.8 (typ.)
	20 GHz ≤ f ≤ 26.5 GHz	< 2.2, 2 (typ.)
	RF attenuation < 10 dB, DC coupled	
	10 Hz ≤ f ≤ 1 GHz	< 2
	1 GHz < f ≤ 26.5 GHz	< 3
	RF attenuation ≥ 10 dB, AC coupled	
	10 MHz ≤ f ≤ 1 GHz	< 1.2
	1 GHz < f < 3.6 GHz	< 1.5, 1.3 (typ.)
	3.6 GHz ≤ f < 20 GHz	< 2, 1.8 (typ.)
	20 GHz ≤ f ≤ 26.5 GHz	< 2.2, 2 (typ.)
Setting range of attenuator	RF input 1	0 dB to 75 dB, in 5 dB steps
	RF input 2	10 dB to 75 dB, in 5 dB steps

Probe power supply		
Supply voltages	3-pin connector	+15 V DC, -12.6 V DC and ground, max. 150 mA (nom.)
	5-pin connector	±10 V DC and ground, max. 100 mA, (nom.)

Noise source drive		
Connector		BNC female
Output voltage		0 V/28 V, max. 100 mA, switchable (nom.)

AF output		
Connector		3.5 mm mini jack
Output impedance		10 Ω (nom.)
Open-circuit voltage		up to 1.5 V, adjustable

USB interface	front panel	2 ports, type A plug, version 2.0
	rear panel	2 ports, type A plug, version 2.0

Reference output		
Connector		BNC female
Impedance		50 Ω (nom.)
Output frequency	internal reference	10 MHz
	external reference	same as reference input signal
Level		> 0 dBm (nom.)

Reference input		
Connector		BNC female
Impedance		50 Ω (nom.)
Input frequency range		1 MHz ≤ f <sub>in</sub> ≤ 20 MHz, in 100 kHz steps
Required level		> 0 dBm into 50 Ω (nom.)

<b>External trigger/gate input</b>		
Connector		BNC female
Trigger voltage		0.5 V to 3.5 V (nom.)
Input impedance		10 kΩ (nom.)
<b>IEC/IEEE bus control</b>		
Command set		interface in line with IEC 625-2 (IEEE 488.2)
Connector		SCPI 1997.0
Interface functions		24-pin Amphenol female SH1, AH1, T6, L4, SR1, RL1, PP1, DC1, DT1, C0
<b>LAN interface</b>		
Connector		10/100/1000BASE-T RJ-45
<b>External monitor</b>		
Connector		VGA-compatible, 15-pin mini D-Sub
<b>User port</b>		
Connector		9-pin D-Sub male
Output		TTL-compatible, 0 V/5 V (nom.), max. 15 mA (nom.)
Input		TTL-compatible, max. 5 V (nom.)
<b>IF/video out (analyzer mode)</b>		
Connector		BNC female, 50 Ω (nom.)
<b>IF out</b>		
Bandwidth		RBW setting
IF frequency		32 MHz (nom.)
Output level (gain versus RF input)	RF attenuation = 0 dB, RF preamplifier = off, span = 0 Hz	0 dB (nom.)
<b>Video out</b>		
Bandwidth		VBW setting
Output scaling	log. display scale	logarithmic
	lin. display scale	linear
Output level	center frequency > 10 MHz, span = 0 Hz, signal at reference level and center frequency	1 V, open circuit (nom.)
<b>Trigger out</b>		
Connector		BNC female
Output		TTL-compatible, 0 V/5 V (nom.)

## General data

<b>Display</b>	21 cm LC TFT color display (8.4")	
Resolution	800 × 600 pixel (SVGA resolution)	
Pixel failure rate	< 1 × 10 <sup>-5</sup>	

<b>Data storage</b>		
Internal	standard with R&S®ESR-B18 option	hard disk ≥ 40 Gbyte solid state disk ≥ 8 Gbyte
External		supports USB 2.0 compatible memory devices

<b>Temperature</b>		
Temperature	operating temperature range permissible temperature range storage temperature range	+5 °C to +40 °C 0 °C to +50 °C –40 °C to +70 °C
Climatic loading		+40 °C at 90 % rel. humidity, in line with EN 60068-2-30

<b>Mechanical resistance</b>		
Vibration	sinusoidal	5 Hz to 150 Hz, max. 2 g at 55 Hz; 0.5 g from 55 Hz to 150 Hz; in line with EN 60068-2-6
	random	10 Hz to 130 Hz, acceleration 1.2 g (RMS), in line with EN 60068-2-64
Shock		40 g shock spectrum, in line with MIL-T-28800F, class 3, MIL-STD-810E, method 516.4, procedure I

<b>EMC</b>	in line with EMC Directive 2004/108/EC including: IEC/EN 61326-1 <sup>13, 14</sup> IEC/EN 61326-2-1 CISPR 11/EN 55011 <sup>13</sup> IEC/EN 61000-3-2 IEC/EN 61000-3-3
------------	---

<b>Recommended calibration interval</b>	1 year
---	--------

<b>Power supply</b>		
AC input voltage range		100 V to 240 V, ±10 % (nom.)
AC supply frequency		50 Hz to 400 Hz, +10 %/–6 % (nom.)
Max. input current		5.2 A (100 V) to 2.2 A (240 V) (nom.)
Power consumption	R&S®ESR3, R&S®ESR7	150 W, max. 250 W with all options (meas.)
	R&S®ESR26	175 W, max. 250 W with all options (meas.)
Safety		in line with IEC 61010-1, EN 61010-1, CAN/CSA-C22.2 No. 61010-1, UL 61010-1
Test mark		VDE-GS, cCSA <sub>US</sub>

<b>Weight and dimensions</b>		
Dimensions	W × H × D	412 mm × 197 mm × 517 mm (16.22 in × 7.76 in × 20.35 in)
Net weight without options	R&S®ESR3, R&S®ESR7 R&S®ESR26	12.8 kg (28.22 lb) 14.6 kg (32.19 lb)

<sup>13</sup> Emission limits for class B equipment.

<sup>14</sup> Immunity test requirement for industrial environment (EN 61326 table 2).

## Options

### R&S®FSV-B9 tracking generator (spectrum analyzer mode)

<b>Frequency</b>		
Frequency range	R&S®ESR3	9 kHz to 3.6 GHz
	R&S®ESR7, R&S®ESR26	9 kHz to 7 GHz

<b>Frequency offset</b>		
Setting range		±1 GHz
Setting resolution		1 Hz

<b>Spectral purity</b>		
SSB phase noise	frequency = 1000 MHz, carrier offset = 100 kHz	-90 dBc (1 Hz) (typ.)

<b>Level</b>		
Setting range	normal mode, 9 kHz ≤ f < 100 kHz normal mode, f ≥ 100 kHz with AM, I/Q, 9 kHz ≤ f < 100 kHz with AM, I/Q, f ≥ 100 kHz	-60 dBm to -10 dBm, in 0.1 dB steps -60 dBm to 0 dBm, in 0.1 dB steps -60 dBm to -20 dBm, in 0.1 dB steps -60 dBm to -10 dBm, in 0.1 dB steps
Max. deviation of output level	frequency = 64 MHz, +20 °C to +30 °C, output level = -10 dBm, frequency offset = 0 Hz, modulation = off	< 1 dB
Frequency response	output level = -10 dBm, referenced to level at 64 MHz, frequency offset = 0 Hz, modulation = off	
	9 kHz ≤ f < 100 kHz	< 4 dB
	100 kHz ≤ f ≤ 7 GHz	< 3 dB

<b>Dynamic range</b>	RBW = 1 kHz, f > 10 MHz	110 dB
----------------------	-------------------------	--------

<b>Harmonics, non-harmonic spurious</b>	output level = -10 dBm	-30 dBc
---	------------------------	---------

<b>Modulation</b>		
Modulation format	external	I/Q, AM, FM
<b>AM</b>	f > 10 MHz	
Modulation depth		0 % to 100 %
Modulation frequency range		0 Hz to 1 MHz
<b>FM</b>	f > 10 MHz	
Frequency deviation		0 Hz to 10 MHz
Modulation frequency range		0 Hz to 10 kHz

<b>RF output</b>		
Connector		N female, 50 Ω
VSWR		1.3, (nom.)

<b>TG I/AM IN</b>		
Connector		BNC female, 50 Ω
Input voltage		1 V (V <sub>pp</sub> )

<b>TG Q/FM IN</b>		
Connector		BNC female, 50 Ω
Input voltage		1 V (V <sub>pp</sub> )

## R&S®FSV-B30 DC power supply for 12 V supply voltage

Input voltage range	10 V to 15 V	
Output voltage	230 V, 50 Hz	
Input current  V <sub>in</sub> = 12 V, instrument without options, preset settings	R&S®ESR3, R&S®ESR7	11 A (typ.)
	R&S®ESR26	14 A (typ.)
	operating temperature range	0 °C to +40 °C
Temperature	storage temperature range	-30 °C to +70 °C
Dimensions	W × H × D	165 mm × 74 mm × 88 mm (6.5 in × 2.91 in × 3.46 in)
Net weight		1.1 kg (2.42 lb)

## R&S®FSV-B32 Lithium-ion battery pack

Battery pack		
Output voltage	12 V (nom.)	
Operating time  instrument without options, preset settings	R&S®ESR3, R&S®ESR7	2 h (nom.)
	R&S®ESR26	1.5 h (nom.)
	with R&S®FSV-B34 charger, T = +25 °C	3.5 h (nom.)
Temperature  operating temperature range, discharge	operating temperature range, charge	0 °C to +50 °C
	storage temperature range	0 °C to +45 °C
	storage temperature range	-20 °C to +60 °C <sup>15</sup>
Dimensions	W × H × D	406 mm × 64 mm × 231 mm (16 in × 2.52 in × 9.09 in)
Net weight		3.4 kg (7.5 lb)

## R&S®FSV-B34 charger for R&S®FSV-B32 Lithium-ion battery pack

AC input voltage range	100 V to 240 V, ±10 % (nom.)	
AC supply frequency	50 Hz to 60 Hz (nom.)	
Power consumption	max. 300 W (nom.)	
Dimensions	W × H × D	400 mm × 127 mm × 203 mm (15.75 in × 5 in × 8 in)
Net weight		3.1 kg (6.9 lb)

<sup>15</sup> The battery packs should be stored in an environment with low humidity, free from corrosive gas at a recommended temperature range < +21 °C.  
Extended exposure to temperatures above +45 °C could degrade battery performance and life.

## R&S®ESR-K55 real-time spectrum analyzer mode

The specifications are based on the specifications of the spectrum analyzer mode.

Therefore, these specifications also apply for the real-time spectrum analyzer mode unless otherwise stated.

<b>Span</b>		
Range	f ≤ 7 GHz, preselection = off	10 kHz to 40 MHz
	f > 7 GHz, overview mode = off	10 kHz to 10 MHz
	f > 7 GHz, overview mode = on	10 kHz to 30 MHz
Resolution	1 Hz	

<b>Frequency readout</b>		
Number of sweep (trace) points		801
Marker resolution		0.01 Hz
Uncertainty		±(marker frequency × reference uncertainty + 10 % × resolution bandwidth + ½ (span/(sweep points -1)) + 1 Hz)
Marker tuning frequency step size		span/800

<b>Sweep time</b>		
Range	real-time spectrum, real-time spectrogram, free run or stop on trigger	52 µs to 1 s <sup>16</sup>
	auto rearm trigger	5.2 µs to 1 s
Resolution	5.2 µs	

<b>Data acquisition</b>		
A/D converter		
Sampling rate		128 Msample/s
Resolution		16 bit
FFT length		1024/2048/4096/8192/16 384
FFT window		Gaussian
FFT overlap factor		≥ 80 %
Spectrum (FFT) processing rate	span = 40 MHz	250 000/s
Minimum detectable signal duration	span = 40 MHz, SNR > 60 dB	25 ns (nom.)

<b>Resolution bandwidths</b>		
Range	RBW 6 dB = off	2 Hz to 128 kHz, fixed span/RBW ratio
	RBW 6 dB = on	3 Hz to 192 kHz, fixed span/RBW ratio
Span/RBW ratio	RBW 6 dB = off	312/625/1250/2500/5000
	RBW 6 dB = on	208/416/833/1666/3333
Bandwidth uncertainty	< 3 % (nom.)	

<b>Video bandwidths</b>	none
-------------------------	------

<b>Channel bandwidths</b>	none
---------------------------	------

<sup>16</sup> Time period during which individual FFTs contribute to the results of the selected trace detector.

**Level**

<b>Amplitude flatness</b>	( $1.25 \times$ signal analysis bandwidth) $\leq f_{\text{center}}$ $\leq 7 \text{ GHz}$	$\pm 0.8 \text{ dB}$ (nom.)
	$f > 7 \text{ GHz}$ , span $\leq 10 \text{ MHz}$	$\pm 1 \text{ dB}$ (nom.)
<b>Spurious-free dynamic range</b>	span = 40 MHz	< -70 dBc (nom.)
<b>Minimum signal duration necessary for specified level measurement uncertainty</b> <sup>17</sup>	RBW 6 dB = off, span/RBW ratio = 312, trace detector = max. peak, span =	
	40 MHz	24 $\mu\text{s}$ (nom.)
	20 MHz	45 $\mu\text{s}$ (nom.)
	10 MHz	86 $\mu\text{s}$ (nom.)
	5 MHz	168 $\mu\text{s}$ (nom.)
	2 MHz	414 $\mu\text{s}$ (nom.)
	1 MHz	824 $\mu\text{s}$ (nom.)
	500 kHz	1.7 ms (nom.)
	200 kHz	4.1 ms (nom.)
	100 kHz	8.2 ms (nom.)
	50 kHz	16.4 ms (nom.)
	20 kHz	41 ms (nom.)
	10 kHz	82 ms (nom.)

**Result display**

Display modes	full screen, split screen
Max. number of screens	4
Result display types	real-time spectrum, persistence spectrum, real-time spectrogram

<b>Real-time spectrum</b>	
Number of traces	4
Trace detector	max. peak, min. peak, average
Trace functions	clear/write, max. hold, min. hold, view
Number of markers	16
Marker readout	frequency, level
Maximum sweep update rate <sup>18</sup>	10 000/s

<b>Persistence spectrum</b>	
Persistence bitmap resolution	801 x 600 points
Persistence bitmap color depth	256 colors
Probability range covered by bitmap colors	selectable, 0 % to 100 %
Persistence duration	0 s to 8 s
Number of markers	16
Marker readout	frequency, level, hit probability
Number of real-time traces	in addition to persistence spectrum display
Real-time trace detector	max. peak, min. peak, sample, average
Real-time trace functions	clear/write, max. hold, min. hold, view

<sup>17</sup> Events lasting shorter than the minimum event duration specification will result in degraded level accuracy.<sup>18</sup> Sweep update rate includes FFT overlap and trace detector processing.

<b>Spectrogram</b>		
Result display		color-graded bitmap
Spectrogram bitmap color depth		240 colors
Dynamic range covered by bitmap colors		selectable, up to 200 dB (nom.)
History depth		max. 100 000 frames <sup>19</sup>
Recording mode		single trace, continuous, frame count
Trace detector		max. peak, min. peak, sample
Number of markers		16
Marker readout		frequency, time/frame number, level
Maximum sweep update rate <sup>20</sup>		10 000/s

## Trigger

<b>Trigger source</b>	free run, frequency mask, external
-----------------------	------------------------------------

<b>Frequency mask trigger</b>		
Trigger level resolution		0.5 dB
Minimum required mask distance to noise floor		30 dB (nom.)
Dynamic range	frequency mask – reference level	0 dB to –80 dB (nom.)
Trigger level accuracy	frequency mask > reference level – 50 dB	±(frequency response + 1.0 dB) (nom.)
	frequency mask > reference level – 70 dB	±(frequency response + 2.5 dB) (nom.)
Trigger uncertainty	span = 40 MHz	±12 µs (nom.)
Trigger conditions		enter mask area, leave mask area
Trigger modes		auto rearm trigger, stop on trigger
Trigger mask		
Mask length		3 to 801 frequency points
Mask frequency resolution		span/800
Mask shape generation		manual, auto set (mask derived from the measured spectrum)
Minimum signal duration for 100 % probability of trigger (nominal values) <sup>21</sup>		see minimum signal duration required for specified level measurement uncertainty

<b>Trigger out</b>		
Connector		BNC female
Output		TTL-compatible, 0 V/5 V (nom.)

<sup>19</sup> A frame is the measurement result displayed in one row of the spectrogram. It may consist of one or more traces, depending on the set sweep count.

For example, a sweep count of 2 means that two traces will be combined to one row in the spectrogram using the set trace detector.

<sup>20</sup> Sweep update rate includes FFT overlap and trace detector processing.

<sup>21</sup> Events lasting shorter than the minimum event duration specification will result in degraded frequency mask trigger accuracy.

## R&S®ESR-K56 IF analysis

Level display (receiver mode)	
IF spectrum	
Span	max. 10 MHz
Resolution bandwidths	10 Hz to 100 kHz in 1/2/3/5 sequence
Detector	sample
Logarithmic level axis	10 dB to 200 dB in steps of 10 dB
Frequency axis	linear
Number of traces	3

## Ordering information

<b>Designation</b>	<b>Type</b>	<b>Order No.</b>
EMI Test Receiver	R&S®ESR3	1316.3003.03
EMI Test Receiver	R&S®ESR7	1316.3003.07
EMI Test Receiver	R&S®ESR26	1316.3003.26
<b>Accessories supplied</b>		
Power cable, probe power cable, quick start guide and CD-ROM (with operating manual and service manual) R&S®ESR26: test port adapter with 3.5 mm female (1021.0512.00) and N female (1021.0535.00) connectors		

## Options

<b>Designation</b>	<b>Type</b>	<b>Order No.</b>	<b>Retrofittable</b>	<b>Remarks</b>
Impact Protection	R&S®ESR-B1	1316.4100.02	yes	user-retrofittable
OCXO Reference Frequency	R&S®FSV-B4	1310.9522.02	yes	user-retrofittable
OCXO Extended Frequency Stability	R&S®FSV-B4	1310.9522.03	yes	user-retrofittable
Tracking Generator (9 kHz to 7 GHz)	R&S®FSV-B9	1310.9545.02	yes	retrofit in service center
Solid State Drive (SSD, removable hard drive)	R&S®ESR-B18	1316.3555.14	yes	user-retrofittable
Spare Hard Drive (removable hard drive)	R&S®ESR-B19	1316.3561.14	yes	user-retrofittable
RF Preamplifier (100 kHz to 7 GHz)	R&S®FSV-B22	1310.9600.02	yes	user-retrofittable, for R&S®ESR3 and R&S®ESR7 only
Frequency Extension 10 Hz and MIL bandwidths	R&S®ESR-B29	1316.3578.02	yes	user-retrofittable
DC Power Supply for 12 V supply voltage	R&S®FSV-B30	1310.9897.02	yes	user-retrofittable
Lithium-Ion Battery Pack	R&S®FSV-B32	1321.3750.03	yes	user-retrofittable, requires R&S®FSV-B30 and R&S®FSV-B34
Lithium-Ion Battery Charger	R&S®FSV-B34	1321.3950.02		
Hardware for Time Domain and Real-Time Analysis	R&S®ESR-B50	1316.3584.02	yes	retrofit in service center
<b>Firmware/software</b>				
Time Domain Scan	R&S®ESR-K53	1316.3590.02		requires R&S®ESR-B50
Real-Time Analysis	R&S®ESR-K55	1316.3603.02		requires R&S®ESR-B50
IF Analysis	R&S®ESR-K56	1316.3610.02		

## Upgrade Kits <sup>22</sup>

<b>Designation</b>	<b>Type</b>	<b>Order No.</b>	<b>Retrofittable</b>	<b>Remarks</b>
Windows 7 Upgrade for R&S®ESR with hard drive	R&S®ESR-U1	1321.3608.02	yes	user-retrofittable
Windows 7 Upgrade for R&S®ESR with solid state drive	R&S®ESR-U1	1321.3608.03	yes	user-retrofittable
Solid State Drive (SSD, removable hard drive)	R&S®ESR-B18	1316.3555.12	yes	user-retrofittable
Spare Hard Drive (removable hard drive)	R&S®ESR-B19	1316.3561.12	yes	user-retrofittable

<sup>22</sup> For R&S®ESR with the following serial numbers: R&S®ESR3: ≤ 101830, R&S®ESR7: ≤ 101393, R&S®ESR26: ≤ 101295.

## Recommended extras

Designation	Type	Order No.
Headphones		0708.9010.00
IEC/IEEE Bus Cable, length: 1 m	R&S®PCK	0292.2013.10
IEC/IEEE Bus Cable, length: 2 m	R&S®PCK	0292.2013.20
19" Rack Adapter	R&S®ZZA-478	1096.3248.00
<b>Matching pads, 50/75 Ω</b>		
Matching Pad, 50/75 Ω, L Section, matching at both ends	R&S®RAM	0358.5414.02
Matching Pad, 50/75 Ω, series resistor, 25 Ω, matching at one end (taken into account in instrument function RF INPUT 75 Ω)	R&S®RAZ	0358.5714.02
<b>SWR bridges, 50 Ω</b>		
SWR Bridge, 50 Ω, 5 MHz to 3 GHz	R&S®ZRB2	0373.9017.5X
SWR Bridge, 50 Ω, 40 kHz to 4 GHz	R&S®ZRC	1039.9492.5X
<b>High-power attenuators</b>		
High-Power Attenuator, 100 W, 3/6/10/20/30 dB, 1 GHz	R&S®RBU100	1073.8495.xx (xx = 03/06/10/20/30)
High-Power Attenuator, 50 W, 3/6/10/20/30 dB, 2 GHz	R&S®RBU50	1073.8695.xx (xx = 03/06/10/20/30)
High-Power Attenuator, 50 W, 20 dB, 6 GHz	R&S®RDL50	1035.1700.52
<b>Connectors and cables</b>		
Probe Power Connector, 3-pin		1065.9480.00
<b>DC block</b>		
DC Block, 10 kHz to 18 GHz (type N)	R&S®FSE-Z4	1084.7443.02
<b>For R&amp;S®ESR26 only</b>		
Test Port Adapter, N male		1021.0541.00
Test Port Adapter, 3.5 mm male		1021.0529.00

<b>Service options</b>		
Extended Warranty, one year	R&S®WE1	Please contact your local Rohde & Schwarz sales office.
Extended Warranty, two years	R&S®WE2	
Extended Warranty, three years	R&S®WE3	
Extended Warranty, four years	R&S®WE4	
Extended Warranty with Calibration Coverage, one year	R&S®CW1	
Extended Warranty with Calibration Coverage, two years	R&S®CW2	
Extended Warranty with Calibration Coverage, three years	R&S®CW3	
Extended Warranty with Calibration Coverage, four years	R&S®CW4	

### Extended warranty with a term of one to four years (WE1 to WE4)

Repairs carried out during the contract term are free of charge <sup>23</sup>. Necessary calibration and adjustments carried out during repairs are also covered. Simply contact the forwarding agent we name; your product will be picked up free of charge and returned to you in top condition a couple of days later.

### Extended warranty with calibration (CW1 to CW4)

Enhance your extended warranty by adding calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated, inspected and maintained during the term of the contract. It includes all repairs <sup>23</sup> and calibration at the recommended intervals as well as any calibration carried out during repairs or option upgrades.

For product brochure, see PD 3606.7201.12 and [www.rohde-schwarz.com](http://www.rohde-schwarz.com)

<sup>23</sup> Excluding defects caused by incorrect operation or handling and force majeure. Wear-and-tear parts are not included.

## Service that adds value

- | Worldwide
- | Local and personalized
- | Customized and flexible
- | Uncompromising quality
- | Long-term dependability

## About Rohde & Schwarz

The Rohde & Schwarz electronics group is a leading supplier of solutions in the fields of test and measurement, broadcast and media, secure communications, cybersecurity, and radiomonitoring and radiolocation. Founded more than 80 years ago, this independent global company has an extensive sales network and is present in more than 70 countries. The company is headquartered in Munich, Germany.

## Sustainable product design

- | Environmental compatibility and eco-footprint
- | Energy efficiency and low emissions
- | Longevity and optimized total cost of ownership

Certified Quality Management  
**ISO 9001**

Certified Environmental Management  
**ISO 14001**

## Rohde & Schwarz GmbH & Co. KG

[www.rohde-schwarz.com](http://www.rohde-schwarz.com)

## Regional contact

- | Europe, Africa, Middle East | +49 89 4129 12345  
[customersupport@rohde-schwarz.com](mailto:customersupport@rohde-schwarz.com)
- | North America | 1 888 TEST RSA (1 888 837 87 72)  
[customer.support@rsa.rohde-schwarz.com](mailto:customer.support@rsa.rohde-schwarz.com)
- | Latin America | +1 410 910 79 88  
[customersupport.la@rohde-schwarz.com](mailto:customersupport.la@rohde-schwarz.com)
- | Asia Pacific | +65 65 13 04 88  
[customersupport.asia@rohde-schwarz.com](mailto:customersupport.asia@rohde-schwarz.com)
- | China | +86 800 810 82 28 | +86 400 650 58 96  
[customersupport.china@rohde-schwarz.com](mailto:customersupport.china@rohde-schwarz.com)

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG

Trade names are trademarks of the owners

PD 3606.7201.22 | Version 03.00 | April 2015 (as)

R&S®ESR EMI Test Receiver

Data without tolerance limits is not binding | Subject to change

© 2012 - 2015 Rohde & Schwarz GmbH & Co. KG | 81671 Munich, Germany



3606720122