Provided by: Advanced Test Equipment Rentals
www.atecorp.com
(800) 404-ATEC

SOLAR LINE IMPEDANCE STABILIZATION NETWORK

SOLAR TYPE 2704-5-PJ-25-BNC
SOLAR TYPE 2704-5-TS-25-BNC

Specifications:

Current rating: ..... 25 amperes
Inductance: ..... 5 µH
Frequency range (recommended): ..... 100 kHz - 100 MHz
Voltage (line to ground): ..... 400 VDC, 270 V 50 - 60 Hz, 135 V 400 Hz
Power connections: ..... PJ Supercon plug and jack, TS ¼-20 threaded stud
RF connector: ..... Type BNC
Coupling capacitor: ..... 0.10 µF
Circuit: ..... Single
Case size: ..... 5.26" x 5.29" x 10.00" (13.36 cm x 13.44 cm x 25.40 cm)
Overall length with base plate: 12.00" (30.48 cm)

Remarks: Designed for CISPR 25. Circuit Isolated from case. Specifications subject to change without notice.

Rev. September 3, 2016

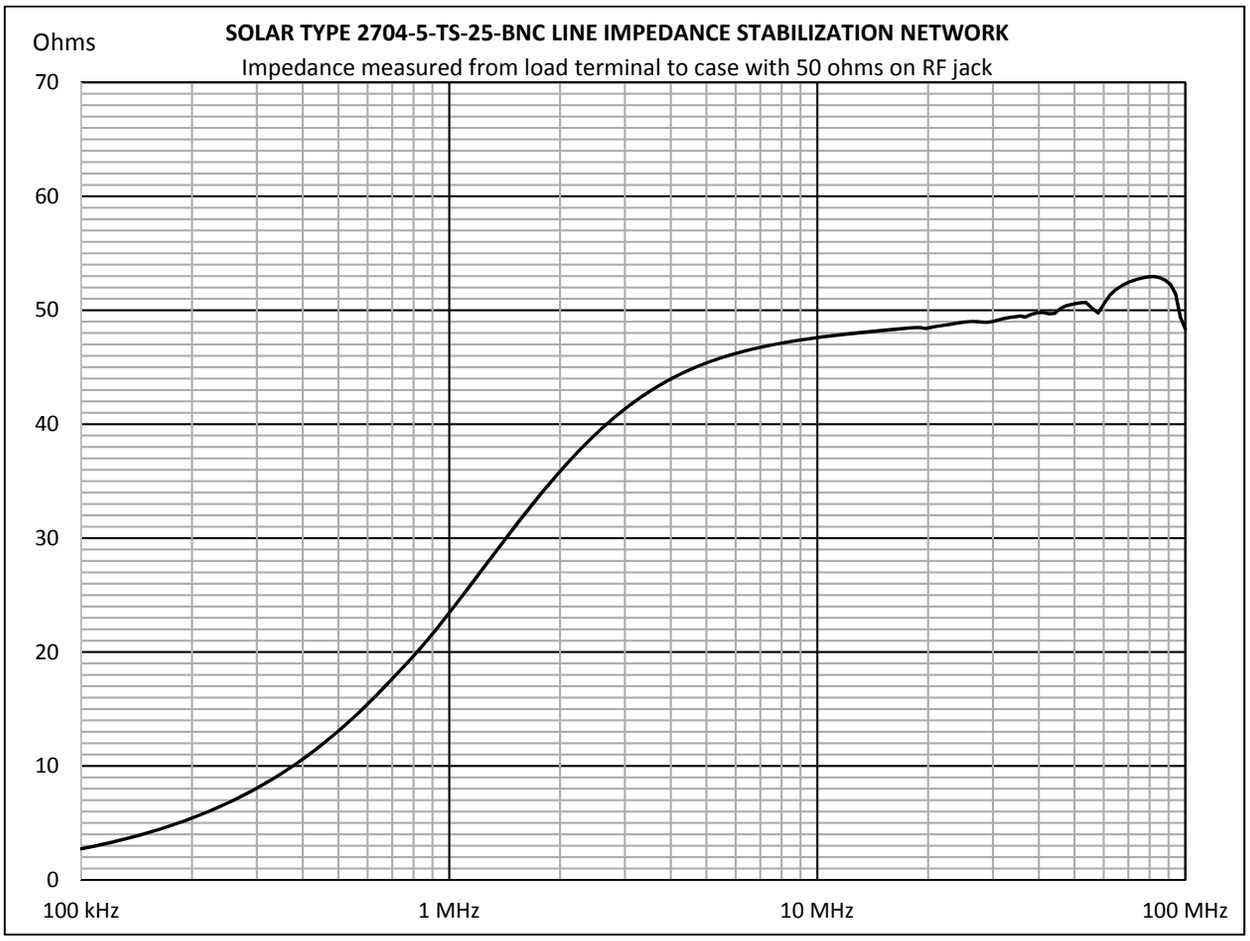

SOLAR ELECTRONICS COMPANY
A Division of A.T. Parker, Inc.
10866 Chandler Boulevard, North Hollywood, CA 91601 818-755-1700 sales@solar-emc.com