

FOT-600

NETWORK TESTING—OPTICAL



- Combines a power meter and a light source and comes with your choice of wavelengths
- Memory capacity of 1000 data items; enables data transfer to a PC via USB connection
- Ideal for network-link qualification: pass/fail LED indicator and thresholds
- Error-free testing: automatic wavelength switching, and no offset nulling required **NEW**
- Visual fault locator (VFL) option for quick and easy troubleshooting (standard)
- Low cost of ownership: three-year warranty and recommended calibration interval
- Complete reporting software **NEW**

Ideal for Network-Link Qualification

Part of EXFO's 600 handheld series, which includes the FPM-600 Power Meter and the FLS-600 Light Source, the FOT-600 Optical Loss Test Set is the ideal tool for network-link qualification. Designed for first-class ease of use, the FOT-600 features a pass/fail LED indicator; what's more, it lets you set your own thresholds for absolute or relative loss measurements.

Thanks to its memory capacity of 1000 data items and its built-in reporting software, the FOT-600 facilitates data management and enables data transfer to a PC via USB connection. Create and customize a complete test report, including certification of the link with pass/fail information.



Error-Free Test Features in a Highly Versatile Unit

When using the FOT-600 in Auto-Switching mode, the light source automatically toggles between available wavelengths. The power meter recognizes the wavelength in use and switches to the proper calibration parameter. With a press of a button, you can store results for all wavelengths at once, providing easy and error-free testing.

Thanks to its unique design, the FOT-600 Optical Loss Test Set reduces risk of error and measurement time in typical measurement situations, as the need for an offset nulling is eliminated.

In addition to network-link qualification features, the highly accurate FOT-600 offers over 40 calibrated wavelengths, including all CWDM wavelengths. What's more, it lets you measure power fluctuations with its Hold Min/Max Power function.

FTTx Ready

EXFO's FOT-600 allows for the testing of passive optical networks (PONs) at 1310 nm, 1490 nm and 1550 nm, the three wavelengths recommended by the ITU-T (G.983.3) for PONs.

Rugged and Versatile


Like all EXFO portable instruments, the FOT-600 is built for top ruggedness and versatility, perfect for the harshest test conditions. It features a keypad/LCD backlight, for easy operation in darker environments. What's more, it is powered by a rechargeable battery.

Reporting Software NEW

This new software tool enables you to produce professional-looking reports with comprehensive documentation. It also offers these functionalities:


- Two test files can be merged into one test report (see note no. 3)
- Pass/fail thresholds that are active during download are automatically activated and displayed in the Report Viewer
- One-touch storage of results for all wavelengths at once (see note no. 1)
- Unit B configuration information can be input and documented (see note no. 2)
- Data transfer can be launched from the Report Viewer window (see note no. 3)
- A pass/fail threshold can be set for an individual fiber or wavelength (see note no. 4)

1
Store test results for all wavelengths at once

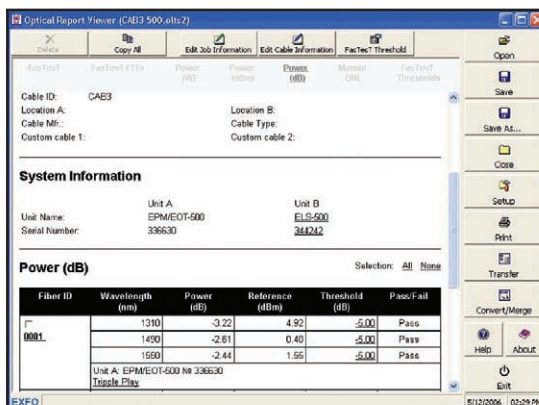


Optical Report Viewer: main window

2
Configure unit B information

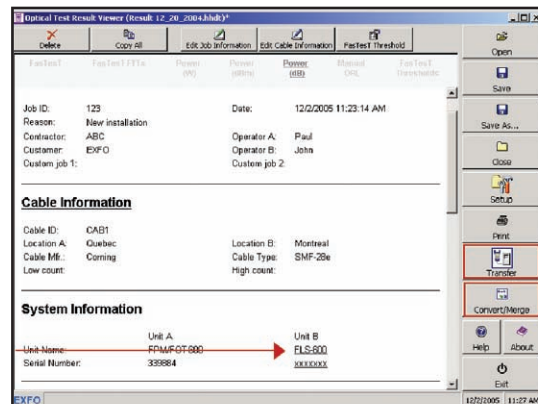

Optical Report Viewer: main window

3
Launch data transfer and connector merger

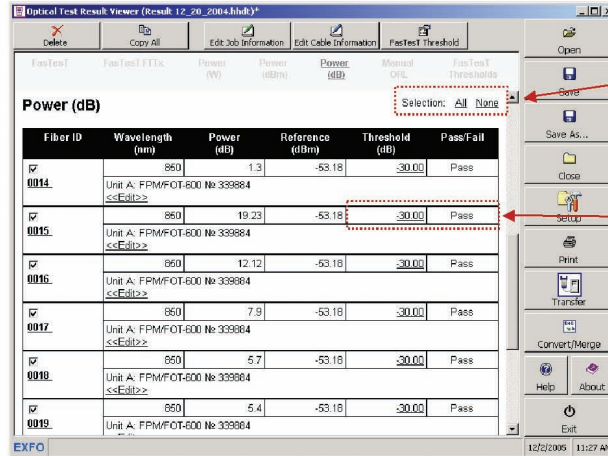

Select all or no results in a specific section

4 Apply a specific threshold each fiber and/or lambda and get a complete pass/fail status (not available with FasTesT results)

Optical Report Viewer: main window

SPECIFICATIONS^a

Model	FOT-602X
Detector	GeX
Power range (dBm) ^b	26 to -55
Wavelength range (nm)	800 to 1650
Calibrated wavelengths (nm)	800, 820, 830, 840, 850, 860, 870, 880, 910, 980, 1270, 1280, 1290, 1300, 1310, 1320, 1330, 1340, 1350, 1370, 1390, 1410, 1430, 1450, 1460, 1470, 1480, 1490, 1500, 1510, 1520, 1530, 1540, 1550, 1560, 1570, 1580, 1590, 1600, 1610, 1620, 1630, 1640, 1650, 1060
Power uncertainty ^c	±5 % ± 3 nW
Resolution (dB)	±0.01 (26 dBm to -45 dBm)
Automatic offset nulling ^d	Yes
Display units	dB, dBm, W
Tone detection	270 Hz, 1 kHz and 2 kHz
Auto-switching ^e	Yes
Warm-up period (min) ^f	0
Data storage (items)	More than 1000
Battery life (hours) (typical)	72
Warranty and recommended calibration period (years)	3

Model	23BL
Central wavelength (nm)	1310 ± 20 1550 ± 20
Spectral width (nm) ^g	≤ 5
Output power (dBm)	≥ 1 ≥ 1
Power stability (dB) ^h	15 min ±0.03 8 h ±0.1
Tone generation	270 Hz, 1 kHz, 2 kHz
Automatic wavelength recognition	Yes
Battery life (hours) (typical in Auto mode)	50
Warranty and recommended calibration period (years)	3

GENERAL SPECIFICATIONS

Size (H x W x D)	190 mm x 100 mm x 62 mm	(7 1/2 in x 4 in x 2 1/2 in)
Weight	0.48 kg	(1.1 lb)
Temperature		
operating	-10 °C to 50 °C	(14 °F to 122 °F)
storage	-40 °C to 70 °C	(-40 °F to 158 °F)
Relative humidity	0 % to 95 % non-condensing	

VFLⁱ

Emitter type	Laser
Wavelength (nm)	650
Output power (dBm)	3

STANDARD ACCESSORIES

User guide, Certificate of Calibration, instrument stickers in six languages, AC adapter/charger, connector adapter (FOA-XX), lithium ion battery, shoulder strap, carrying case, USB cable, reporting software.

SAFETY

21 CFR 1040.10 and IEC 60825-1:1993+A1:1997+A2:2001:
CLASS 1M LASER PRODUCT
CLASS 3R LASER PRODUCT FOR VFL



Notes

- Guaranteed unless otherwise specified. All specifications valid at 23 °C ± 1 °C, with an FC connector and at 1550 nm for detector.
- In CW mode; sensitivity defined as 6 x rms noise level.
- For calibration wavelengths. Valid up to 20 dBm for FOT-602X.
- For power > -25 dBm for FOT-602X.
- At 850 nm, 1300 nm, 1310 nm, 1490 nm, 1550 nm and 1625 nm; for power > -40 dBm (typical) for FOT-602X.
- For a variation of ≤ 0.06 dB at power levels ≥ -25 dBm for FOT-602X.
- rms for FP lasers.
- After a 15-minute warm-up period, and using an APC connector on the power meter (except for multimode sources, for which a PC connector is used). Expressed as ± half the difference between the maximum and minimum values measured during the period.
- Typical values in 62.5/125 μm fiber.

ORDERING INFORMATION

FOT-60X-XX-XX-VFL

Model ■

FOT-602X-23BL = High-power Ge detector, 1310/1550 nm laser source 9/125 μm

Connector Adapter ■

FOA-12 = Biconic
 FOA-14 = D4, D4/PC
 FOA-16 = SMA/905, SMA/906
 FOA-22 = FC (PC/SPC/UPC/APC), NEC-D3
 FOA-28 = DIN 47256 (LSA): DIN 47256 (PC/APC)
 FOA-32 = ST (PC/SPC/UPC)
 FOA-40 = Diamond HMS-0HFS-3 (3.5 mm)
 FOA-54 = SC (PC/SPC/UPC/APC)
 FOA-76 = FSMA HMS-10/AG, HFS-10/AG
 FOA-78 = Radiall EC
 FOA-84 = Diamond HMS-10, HFS-13
 FOA-96B = E-2000
 FOA-98 = LC
 FOA-99 = MU

■ Visual Fault Locator

VFL = Visual fault locator
 (universal 2.5 mm connector)

■ Connector*

EI-EUI-28 = UPC/DIN 47256
 EI-EUI-76 = UPC/HMS-10/AG
 EI-EUI-89 = UPC/FC narrow key
 EI-EUI-90 = UPC/ST
 EI-EUI-91 = UPC/SC
 EI-EUI-95 = UPC/E-2000

NOTE

a. Singlemode only.

Example: FOT-602X-23BL-FOA-22-EI-EUI-89-VFL

* EXFO Universal Interface is protected by US patent 6,612,750.

EXFO Corporate Headquarters > 400 Godin Avenue, Quebec City (Quebec) G1M 2K2 CANADA | Tel.: +1 418 683-0211 | Fax: +1 418 683-2170 | info@EXFO.com

			Toll-free: +1 800 663-3936 (USA and Canada) www.EXFO.com
EXFO America	3701 Plano Parkway, Suite 160	Plano, TX 75075 USA	Tel.: +1 800 663-3936 Fax: +1 972 836-0164
EXFO Asia	100 Beach Road, #22-01/03 Shaw Tower	SINGAPORE 189702	Tel.: +65 6333 8241 Fax: +65 6333 8242
EXFO China	36 North, 3 rd Ring Road East, Dongcheng District Room 1207, Tower C, Global Trade Center	Beijing 100013 P. R. CHINA	Tel.: + 86 10 5825 7755 Fax: +86 10 5825 7722
EXFO Europe	Omega Enterprise Park, Electron Way	Chandlers Ford, Hampshire S053 4SE ENGLAND	Tel.: +44 2380 246810 Fax: +44 2380 246801
EXFO NetHawk	Elektronikkatie 2	FI-90590 Oulu, FINLAND	Tel.: +358 (0)403 010 300 Fax: +358 (0)8 564 5203
EXFO Service Assurance	270 Billerica Road	Chelmsford, MA 01824 USA	Tel.: +1 978 367-5600 Fax: +1 978 367-5700

EXFO is certified ISO 9001 and attests to the quality of these products. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. EXFO has made every effort to ensure that the information contained in this specification sheet is accurate. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices. In addition, all of EXFO's manufactured products are compliant with the European Union's WEEE directive. For more information, please visit www.EXFO.com/recycle. Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor.

For the most recent version of this spec sheet, please go to the EXFO website at <http://www.EXFO.com/specs>
 In case of discrepancy, the Web version takes precedence over any printed literature.