



## UCS 200N SERIES

### ULTRA COMPACT SIMULATORS FOR AUTOMOTIVE TRANSIENTS



#### DO BADAŃ ZGODNIE Z ...

- > Audi (Reference vehicles)
- > BMW - (Airbag ECU)
- > BMW 600 13.0 (Part 2)
- > BMW GS 95002 (1999)
- > BMW GS 95002 (2001)
- > BMW GS 95024-2-1 (2010-01)
- > Case New Holland ENS0310
- > Chrysler CS-11809 (2009)
- > Chrysler CS-11979
- > Chrysler DC-11224 Rev.A
- > Chrysler PF-9326
- > Claas CN 05 0215
- > Cummins 14269 (982022-026)
- > DaimlerChrysler DC-10614
- > DaimlerChrysler PF-10540
- > EN 300329
- > EN 300340
- > EN 300342-1
- > EN 301489-1
- > EN 301489-17
- > EN 301489-24
- > ...

#### ULTRA-COMPACT SIMULATORS FOR AUTOMOTIVE TRANSIENTS FOR PULSES 1, 2 AND 3A/3B

The UCS 200N Ultra-Compact Simulator series for Automotive Transients unifies the capabilities of an EFT/Burst simulator, a Micropulse simulator and the required coupling network into one box. The UCS 200N series is equipped to meet all international and car manufacturer specifications from around the globe. The built-in coupling network ranges up to 200A depending on the model. The built-in coupling network can be used and controlled by any unit of the LD 200N series, VDS 200N series and PFS 200N series. For tests beyond standard's requirements the waveform parameters of the Micropulse generator can be varied in a wide range by means of the FreeStyle mode.

#### HIGHLIGHTS

- > **Built-in EFT/Burst generator module**
- > **Built-in Micropulse generator module (ISO 7637, JASO, SAE and NISSAN)**
- > **Built-in coupling network 60V, up to 200A**
- > **Built-in battery switch**
- > **Overcurrent protection**
- > **USB and GPIB-Bus**

#### OBSZARY ZASTOSOWAŃ

-  AUTOMOTIVE
-  TELECOM

## PARAMETRY TECHNICZNE

## BENEFITS

**SMARTEST SOLUTION FOR AUTOMOTIVE TRANSIENT TESTING**

Never before an Ultra-Compact Simulator for automotive transient testing like the UCS 200N series was available. All international standards and most car manufacturer requirements have been put into one box. All pulses are fully compliant to the specifications. Even more, the waveform parameters for micropulses can be varied in order to test with pulses beyond any standard specification.

The UCS 200N series is the heart of the redesigned EM TEST Automotive test set-up having the ability to control any external EM TEST Load Dump and Battery Supply simulator. The built-in coupling network for nominal DC currents of up to 200A forms the single-port DUT connection for fully automated tests.

The software iso.control with its extensive standards library put this test equipment to the top with almost unlimited test capabilities.

## OPERATION

**EASY TO OPERATE**

Front panel menu and function keys enable the user to program his test routines quickly and accurately. The cursor allows fast control of all test parameters of the programmed routine, thus test procedures are simplified and confidence is generated that every step is carried out correctly.



## SOFTWARE

**ISO.CONTROL SOFTWARE FOR CONTROL AND DOCUMENTATION**

Outstanding user convenience, clearly structured windows and operation features and the EM TEST standards library along with the flexibility to generate user specific test sequences very easily are the main features of iso.control software. The software is automatically configured according to the connected EM TEST generators. iso.control software covers international/national standards and most of the manufacturer standards and is continuously updated. Extensive reporting capabilities help the user to create test reports that meet international requirements. iso.control is supported by Windows 2000, Windows XP, Windows Vista and Windows 7. Remote control is achieved either via USB or GPIB. iso.control supports a wide range of GPIB cards of National Instruments.

## ACCESSORIES

**ACC - CAPACITIVE COUPLING CLAMP**

All lines other than supply lines are subjected to electrical fast transient pulses by means of the ACC complying to ISO 7637-3:2007

**CA EFT KIT - VERIFICATION KIT FOR EFT/BURST PULSES**

As per ISO 7637-2:2011 the characteristic of the burst generator needs to be verified with two different loads 50 ohm and 1,000 ohm. EM TEST offers a calibration kit consisting of the two loads and an adapter to verify the pulses.

**CA ISO - LOAD RESISTORS FOR PULSE VERIFICATION**

A set of highly-accurate load resistors is unified in a single box for the verification of micropulses and Load Dump pulses as specified in ISO 7637-2:2011, Annex C and a wide range of manufacturer specifications.

## PARAMETRY TECHNICZNE

## UCS 200N SERIES

## UCS 200N MODELS

UCS 200N50	Built-in coupling/decoupling network, 60V/50A, 100A@500ms
UCS 200N100	Built-in coupling/decoupling network, 60V/100A, 150A@500ms
UCS 200N150	Built-in coupling/decoupling network, 60V/150A
UCS 200N200	Built-in coupling/decoupling network, 60V/200A

## INPUT

DUT supply +/-	DC voltage from VDS 200N or any other DC supply
Pulse 5, 7	From one LD 200N

## OUTPUT

DUT supply +/-	Central DUT output
Coaxial output port	To connect the capacitive coupling clamp as per ISO 7637-3:2007

## ELECTRICAL FAST TRANSIENTS

## EFT/BURST MODULE FOR TEST PULSES 3A/3B

	As per ISO 7637-2
Test voltage	25V - 1,000V ± 10%
Rise time	5ns ± 1.5ns
Pulse duration	150ns ± 45ns
Verification	As per Annex C of ISO 7637-2:2011 into 50ohm and 1,000ohm load
Source impedance	Z <sub>q</sub> = 50ohm
Polarity	Positive/negative (Pulse 3b/3a)

## TRIGGER CIRCUIT

Trigger of bursts	Automatic, manual, external
Burst duration	T <sub>4</sub> = 0.1ms - 999.9ms
Repetition rate	T <sub>5</sub> = 10ms - 9,999ms
Spike frequency	f = 0.1kHz - 200kHz
Test duration	T = 0:01min - 999:59min T > 999:59min --> endless

## OUTPUTS

Direct	Via 50ohm-coaxial connector (for tests using e.g. a capacitive coupling clamp)
Coupling mode	To the + battery line (supply lines)
CRO trigger	5V trigger signal for oscilloscope

## TEST ROUTINES

Quick Start	On-line adjustable parameters, easy-to-use
Standard Test routines	As per ISO 7637-2:2011, Levels 1 - 4
User Test routines	Random burst release Change voltage after T Change frequency after T

## PARAMETRY TECHNICZNE

## MICROPULSES

## MICROPULSE MODULE FOR TEST PULSES 1, 2A AND 6

	As per ISO 7637-2:2011
Test voltage	U = 20V - 600V ± 10% (peak voltage and polarity as per selected standard)
Repetition rate	0.2s - 99.0s

## ISO PULSE 1 (12V)

Rise time	1us +0%/-50% (10% - 90%)
Pulse duration	2ms ± 10% (10% - 10%)
Int. resistor	10ohm ± 10%

## ISO PULSE 1 (24V)

Rise time	3us +0%/-50% (10% - 90%)
Pulse duration	1ms ± 10% (10% - 10%)
Int. resistor	50ohm ± 10%

## ISO PULSE 2 (12V/24V)

Rise time	1us +0%/-50% (10% - 90%)
Pulse duration	50us ± 10% (10% - 10%)
Int. resistor	2ohm ± 10%

## ISO PULSE 6 (12V) AS PER ISO 7637-1:1990

Rise time	60us +0%/-50% (10% - 90%)
Pulse duration	300us ± 10% (10% - 10%)
Int. resistor	30ohm ± 10%

## AS PER ISO 7637-2 THE FOLLOWING STANDARDS CAN BE COVERED

SAE J1113	GM 3097
BMW	Volkswagen
PSA	Chrysler PF 9326
DC 10614	Renault
FIAT	Mitsubishi
Honda	Ford ES-XW7T

## MICROPULSES

## TRIGGER

Automatic	Automatic release of the pulses
Manual	Manual release of a single pulse
External	External release of a single pulse
Battery switch	Off time, selectable; 0 - 10,000ms

## OUTPUT

DUT supply +/-	Central DUT output
Coupling	To the battery +line
Decoupling	Via diode and battery supply switch

## TEST ROUTINES

Quick Start	Immediate start; easy to use and fast
User Test routines	1. Custom made test routines 2. Change voltage after n pulses
Standard Test routines	As per ISO 7637, SAE J1113, JASO and manufacturer specifications
Service	Service, setup, self test

## PARAMETRY TECHNICZNE

MICROPULSES AS PER  
MANUFACTURER STANDARDS

## JASO D-001, PULSE A2

Test voltage	+110V
Capacitor	C = 4.7uF
Pulse duration	2.5us ± 30% at tau(36.8%)
R1	0.6ohm ± 10%
R2	0.4ohm ± 10%
Polarity	Positive

## JASO D-001, PULSE B2

Test voltage	-260V
Capacitor	C = 33uF
Pulse duration	2.0ms ± 20% at tau(36,8%)
R1	60ohm ± 10%
R2	80ohm ± 10%
Polarity	Negative

## JASO D-001, PULSE D2

Test voltage	+170V
Capacitor	C = 2.2uF
Pulse duration	2.5us ± 30% at tau(36,8%)
R1	1.2ohm ± 10%
R2	0.9ohm ± 10%
Polarity	Positive

## NISSAN 28400 NDS 03, PULSE B2

Test voltage	-300V ± 10%
Capacitor	C = 33uF
R1	100ohm ± 10%
R2	75ohm ± 10%
Polarity	Negative

## NISSAN 28400 NDS 07, PULSE C8

Test voltage	±300V ± 10%
Capacitor	C = 1uF
R1	500ohm ± 10%
R2	450ohm ± 10%
Polarity	Positive and negative

MICROPULSES AS PER  
MANUFACTURER STANDARDS

## NISSAN 28400 NDS 07, PULSE C50

Test voltage	±300V ± 10%
Capacitor	C = 33uF
R1	30ohm ± 10%
R2	200ohm ± 10%
Polarity	Positive and negative

## NISSAN 28400 NDS 07, PULSE C300

Test voltage	-300V ± 10%
Capacitor	C = 33uF
R1	100ohm ± 10%
R2	75ohm ± 10%
Polarity	Negative

## SAE J1455 | MUTUAL PULSE

Rise time	1us ± 20% (10% - 90%)
Pulse duration	15µs ± 20% at tau(36.8%)
Int. resistor	50ohm ± 10%

## SAE J1455 | INDUCTIVE PULSE

Rise time	1us ± 20% (10 - 90%)
Pulse duration	1,000us ± 20% at tau(36.8%)
Int. resistor	20ohm ± 10%

## FREESTYLE MODE MICROPULSES

## PULSE PROGRAMMING MODE

Rise time	1us - 10us in steps of 1us
Pulse duration	50us - 10,000us
Int. resistor	2ohm - 100ohm in steps of 5ohm; 200ohm, 400ohm and 450ohm

## PARAMETRY TECHNICZNE

## GENERAL DATA

## DIMENSIONS AND WEIGHT

UCS 200N50	19"/3HU, approx. 20kg
UCS 200N100	19"/6HU, approx. 30kg
UCS 200N150	19"/9HU, approx. 35kg
UCS 200N200	19"/9HU, approx. 35kg
Supply voltage	115/230V +10/-15%
Fuses	2 x T 2AT (230V) or 2 x T 4AT (115V)


## INTERFACE

Serial interface	USB
Parallel interface	IEEE 488, addresses 1 - 30
CN interface	To control the internal CN and battery switch

## OPTIONS

ACC	Capacitive coupling clamp
KW50	100:1 divider, 50ohm
KW1000	400:1 divider, 1,000ohm
CA EFT kit	EFT/Burst verification kit
A6dB	6dB attenuator, 50ohm
CA ISO	Load resistors for the verification of micropulses and Load Dump pulses
iso.control	Software to control the test, including standard library, test report facility and data conversion generator.

# KOMPETENTNI, GDZIEKOLWIEK BYŚ BYŁ

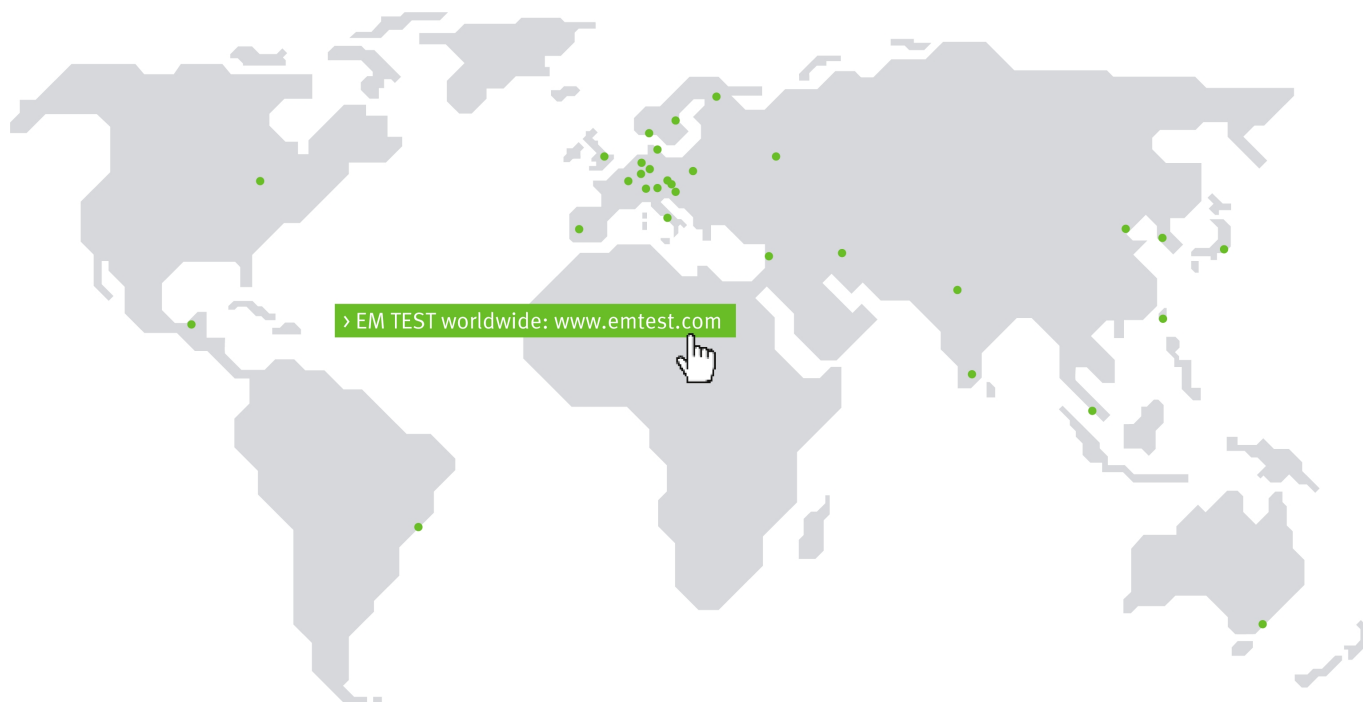

## BEZPOŚREDNI KONTAKT Z EM TEST

### Szwajcaria

EM TEST (Switzerland) GmbH › Sternenhofstraße 15 › 4153 Reinach › Switzerland  
 Telefon +41 (0)61/7179191 › Fax +41 (0)61/7179199  
 Internet: www.emtest.ch › E-mail: sales@emtest.ch

### Niemcy

EM TEST GmbH › Lünener Straße 211 › 59174 Kamen › Deutschland  
 Telefon +49 (0)2307/26070-0 › Fax +49 (0)2307/17050  
 Internet: www.emtest.com › E-mail: info@emtest.de

### Francja

EM TEST FRANCE › Le Trident - Parc des Collines › Immeuble B1 - Etage 3 › 36, rue Paul Cézanne › 68200 Mulhouse › France  
 Telefon +33 (0)389 31 23 50 › Fax +33 (0)389 31 23 55  
 Internet: www.emtest.fr › E-mail: info@emtest.fr

### Polska

EM TEST Polska › ul. Ogrodowa 31/35, 00-893 Warszawa › Polska  
 Telefon +48 (0)518 64 35 12  
 Internet: www.emtest.com/pl › E-mail: info.polska@emtest.de

### USA / Kanada

EM TEST USA Inc. › 9250 Brown Deer Road › San Diego › CA 92121  
 Telefon +1 (858) 699 1685 › Fax +1 (858) 458 0267  
 Internet: www.emtest.com › E-mail: tom.revesz@ametek.com

### Chiny

EM TEST Representative Office Beijing › Rm 913, Leftbank › No. 68 Bei Si Huan Xi Lu › Haidian District › Beijing 100080 › P.R. China  
 Telefon +86 (0)10 82 67 60 27 › Fax +86 (0)10 82 67 62 38  
 Internet: www.emtest.com › E-mail: emtestbj@public.bta.net.cn

### Malezja

EM TEST (M) SDN BHD › Unit B2-6, Jalan Dataran SD2 › Dataran SD2, PJU9 › Bandar Sri Damansara › 52200 Kuala Lumpur › Malaysia  
 Telefon +60 (03)62 73 22 01 › Fax +60 (03)62 74 22 01  
 Internet: www.emtest.com › E-mail: sales@emtest.com.my

Wszystkie informacje dotyczące dostaw, wyglądu zewnętrznego i danych technicznych opisujących aktualny stan wraz z datą publikacji mogą ulec zmianie bez wcześniejszych informacji.