



# AA-80M1G-1000 SOLID STATE HIGH POWER AMPLIFIER



## FEATURES

- Rack mounted system
- Class AB linear LDMOS design
- Instantaneous wide bandwidth
- Suitable for all modulations standards
- Built-in protection circuits
- High reliability and ruggedness

## ELECTRICAL SPECIFICATIONS

Parameter	Specification	Notes
Operating Frequency Range	80 - 1000 MHz	
Power Output @ Psat	1000 Watt Min	CW
Power Output @P1dB GCP	700 Watt Min	CW
Power Gain	60 dB Min	
Power Gain Flatness	4.0 dB p-p Max	
Input Return Loss	10 dB Min	Relative to 50 Ohm
2-Tone Intermodulation (IMD)	-30 dBc Typ	50dBm/Tone, Δ = 1MHz
Harmonics	-20 dBc Typ	
Spurious	-60 dBc Max	Non-harmonics
Operating Voltage	180 - 240 VAC	
Power Consumption	8 KW Max	At rated Pout
Input Power Protection	+8 dBm Max	<10 Sec without damage
Load VSWR Protection	10: 1	<1 minute at rated Pout


## ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Ambient Temperature	0 to +50 °C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	5 to 95 %	Non-condensation

## MECHANICAL SPECIFICATIONS


Parameter	Specification	Notes
Dimensions W x H x D	R5U + R3U	Rack Mount Chassis
Weight	60 Kg. Max	
RF Connectors In/Out	Type-N Female	
AC Power / Interface	IEC 60320-C14 / 9-Pin D-Sub	Or equivalent
Cooling	Built in Fan Cooling	Variable speed
<b>OPTIONAL:</b> Digital Monitor & Control FWD, REV, VSWR, GAIN, ALC, V & I, TEMP	Ethernet RJ-45 TCP/IP, RS422/485 Optional GPIB Interface	Remote Bluetooth application

### OUTLINE DRAWING

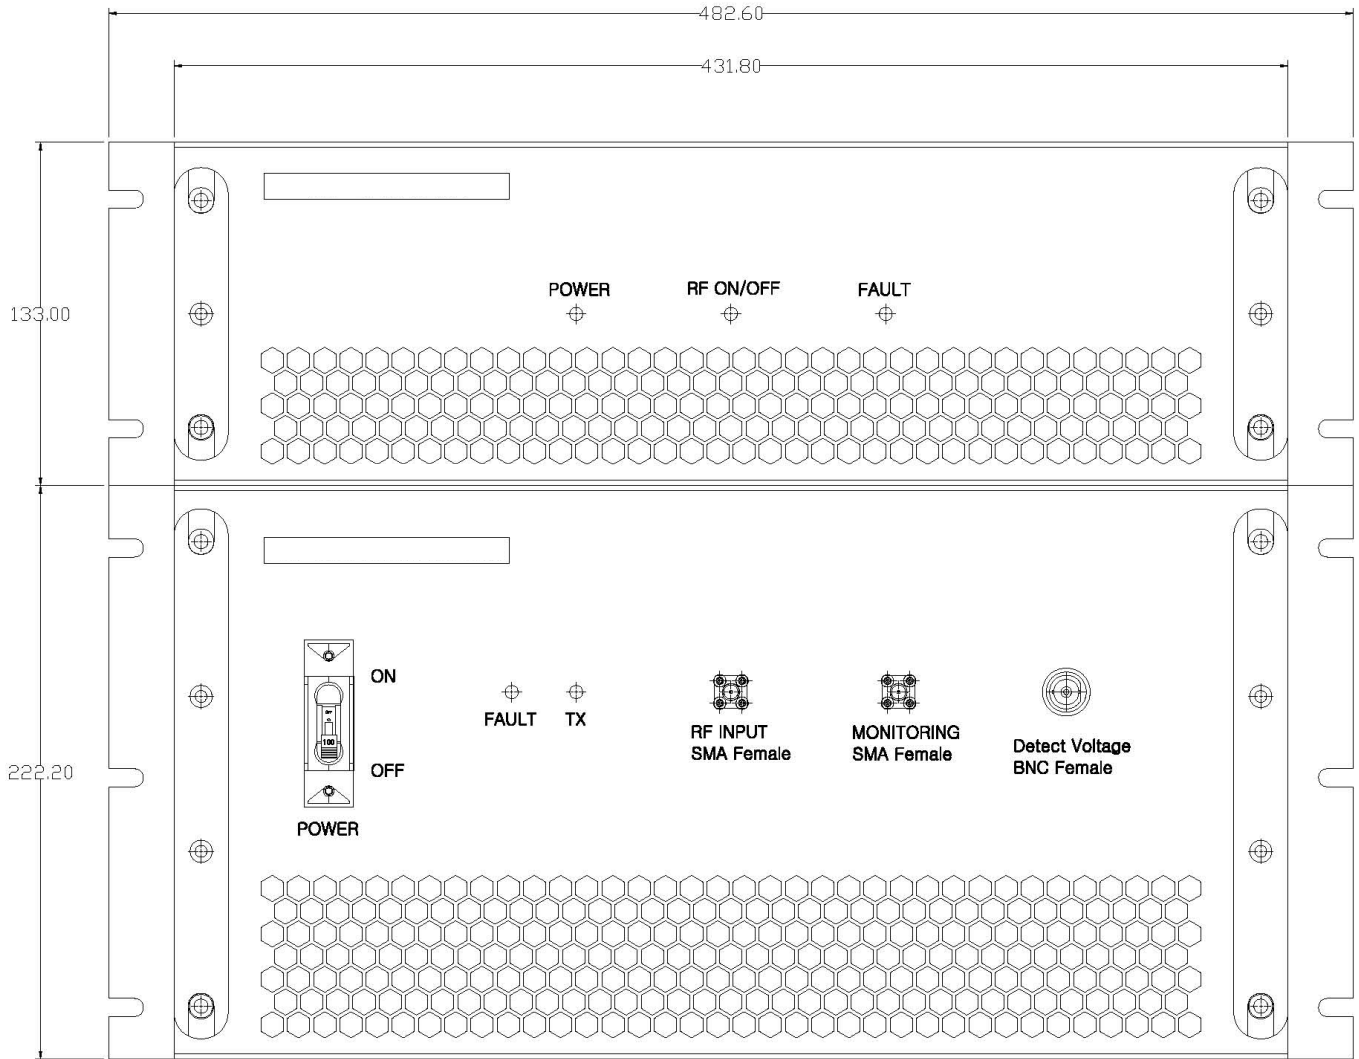







# AA-80M1G-1000 SOLID STATE HIGH POWER AMPLIFIER

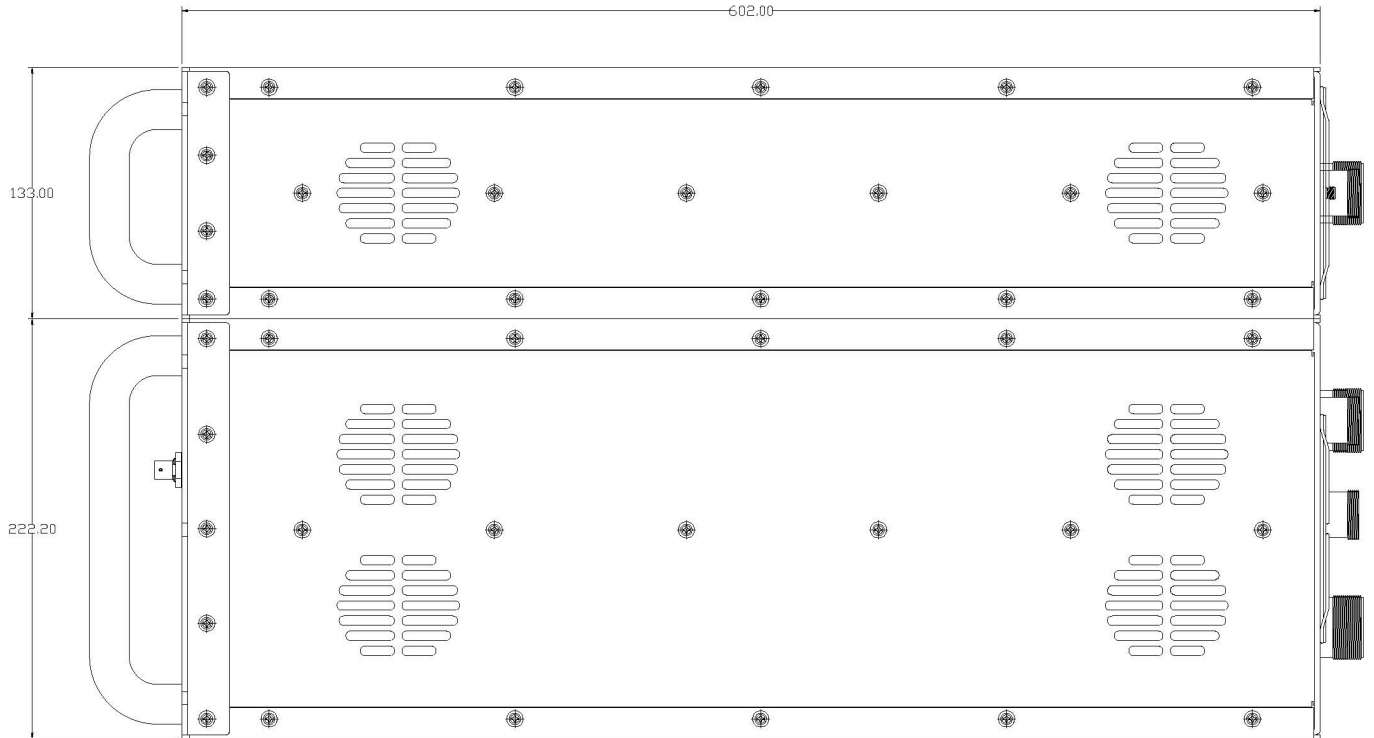



# AA-80M1G-1000 SOLID STATE HIGH POWER AMPLIFIER

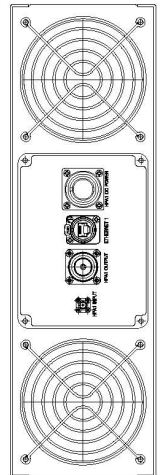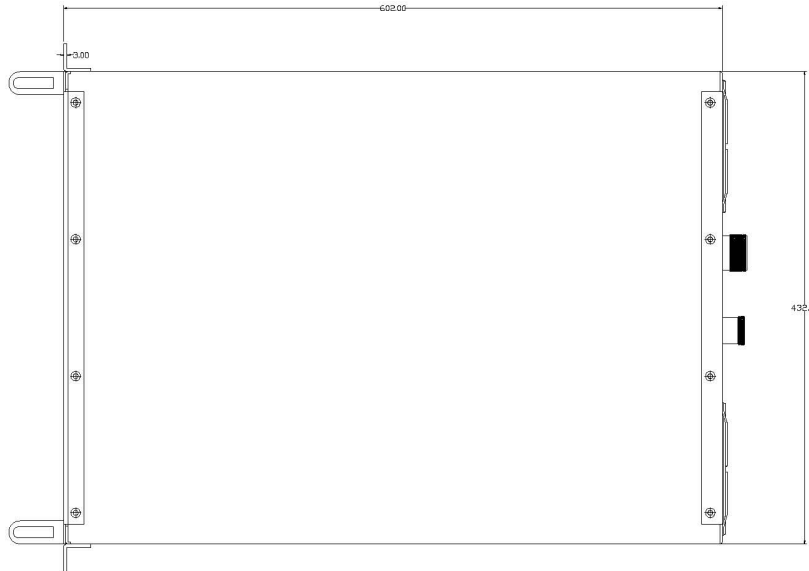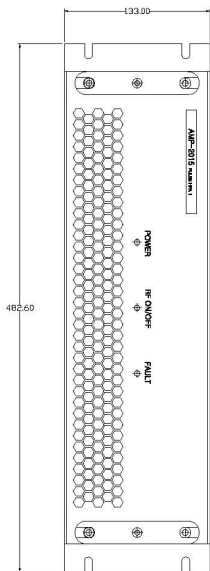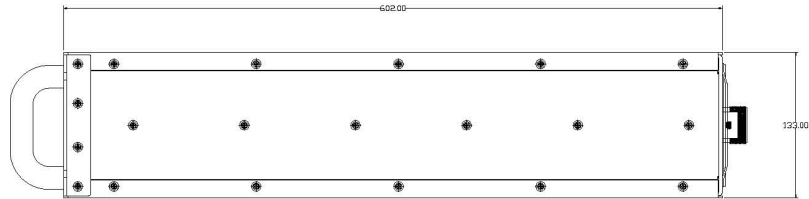



# AA-80M1G-1000 SOLID STATE HIGH POWER AMPLIFIER

