

SOLAR LINE IMPEDANCE STABILIZATION NETWORK


SOLAR TYPE 2309-50-BP-25-N

Specifications:

Current rating: 25 amperes
 Inductance: 50 μ H
 Frequency range (recommended): 10 kHz – 100 MHz
 Voltage (line to ground): 400 VDC, 270 V 50 – 60 Hz, 135 V 400 Hz
 Power connections: 3/4" standard binding posts
 RF connector: Type N (2)
 Coupling capacitor: 0.25 μ F
 Circuit: Dual
 Case size: 13.48" x 7.25" x 13.25" (34.24 cm x 18.42 cm x 33.66 cm)
 Overall length with base plate: 17.25" (43.82 cm)

Remarks: Designed for MIL-STD-461D/E/F/G. Specifications subject to change without notice.

Rev. September 3, 2016

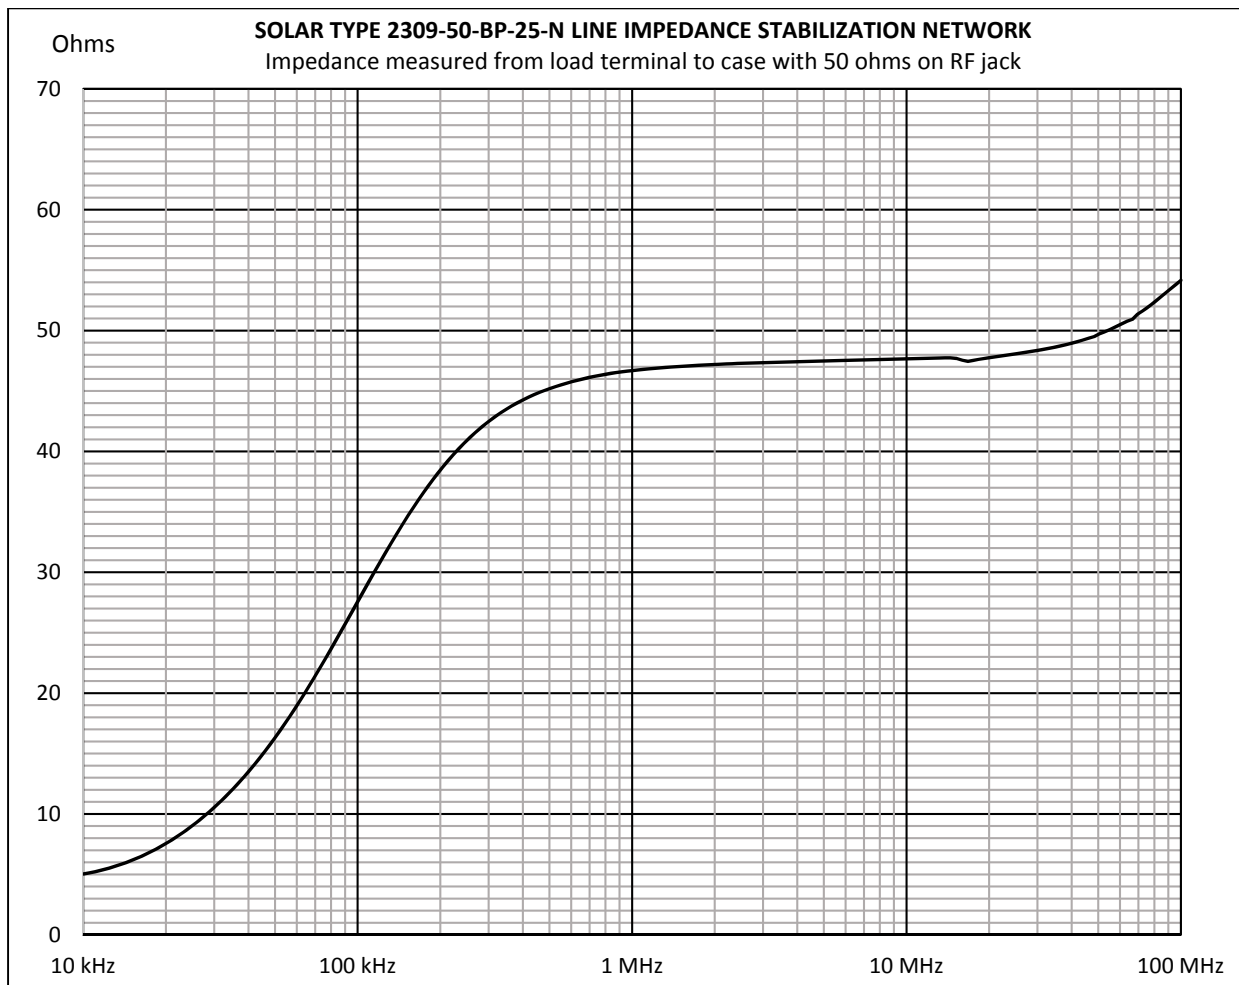

SOLAR ELECTRONICS COMPANY

A Division of A.T. Parker, Inc.