

SOLAR LINE IMPEDANCE STABILIZATION NETWORK


SOLAR TYPE 21107-50-TS-50-N

Specifications:

Current rating: 50 amperes
 Inductance: 50 μ H
 Frequency range (recommended): 150 kHz – 30 MHz
 Voltage (line to ground):..... 400 VDC, 270 V 50-60 Hz, 135 V 400 Hz, 135V 800 Hz
 Power connections:..... TS 1/4-20 threaded stud
 RF connector: Type N (2)
 Coupling capacitor: 0.10 μ F
 Circuit: Single
 Case size: 10.29" x 9.25" x 13.00" (26.14 cm x 23.50 cm x 33.02 cm)
 Overall length with base plate: 17.00" (43.18 cm)

Remarks: Designed for CISPR 16-1-2 Ed. 1.2. Specifications subject to change without notice.

Rev. September 3, 2016

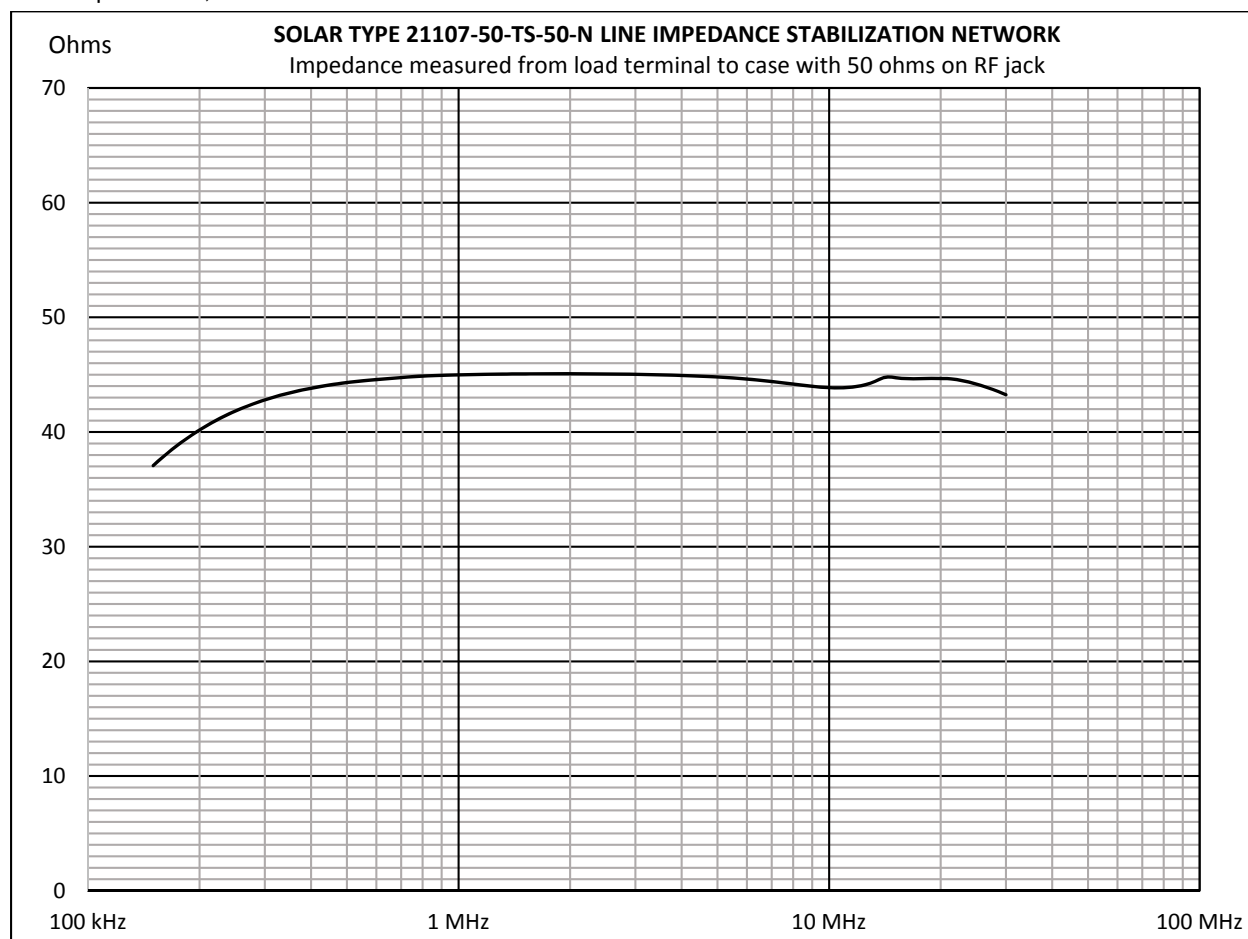

SOLAR ELECTRONICS COMPANY

A Division of A.T. Parker, Inc.

10866 Chandler Boulevard, North Hollywood, CA 91601 818-755-1700 sales@solar-emc.com