

SOLAR LINE IMPEDANCE STABILIZATION NETWORK


SOLAR TYPE 8309-5-TS-100-N

Specifications:

Current rating: 100 amperes
 Inductance: 5 μ H
 Frequency range (recommended): 150 kHz – 65 MHz
 Voltage (line to ground):.....600 VDC, 500 V 50-60 Hz, 480 V 400 Hz
 Power connections:..... TS, 1/4-20 threaded studs
 RF connector: Type N
 Coupling capacitor:0.10 μ F
 Circuit: Single
 Case size: 10.29" x 9.25" x 13.00" (26.14 cm x 23.50 cm x 33.02 cm)
 Overall length with base plate: 17.00" (43.18 cm)

Remarks: Designed for MIL-STD-462 Notice 3, DO-160C, and FCC Part 18.
 Specifications subject to change without notice.

Rev. September 3, 2016

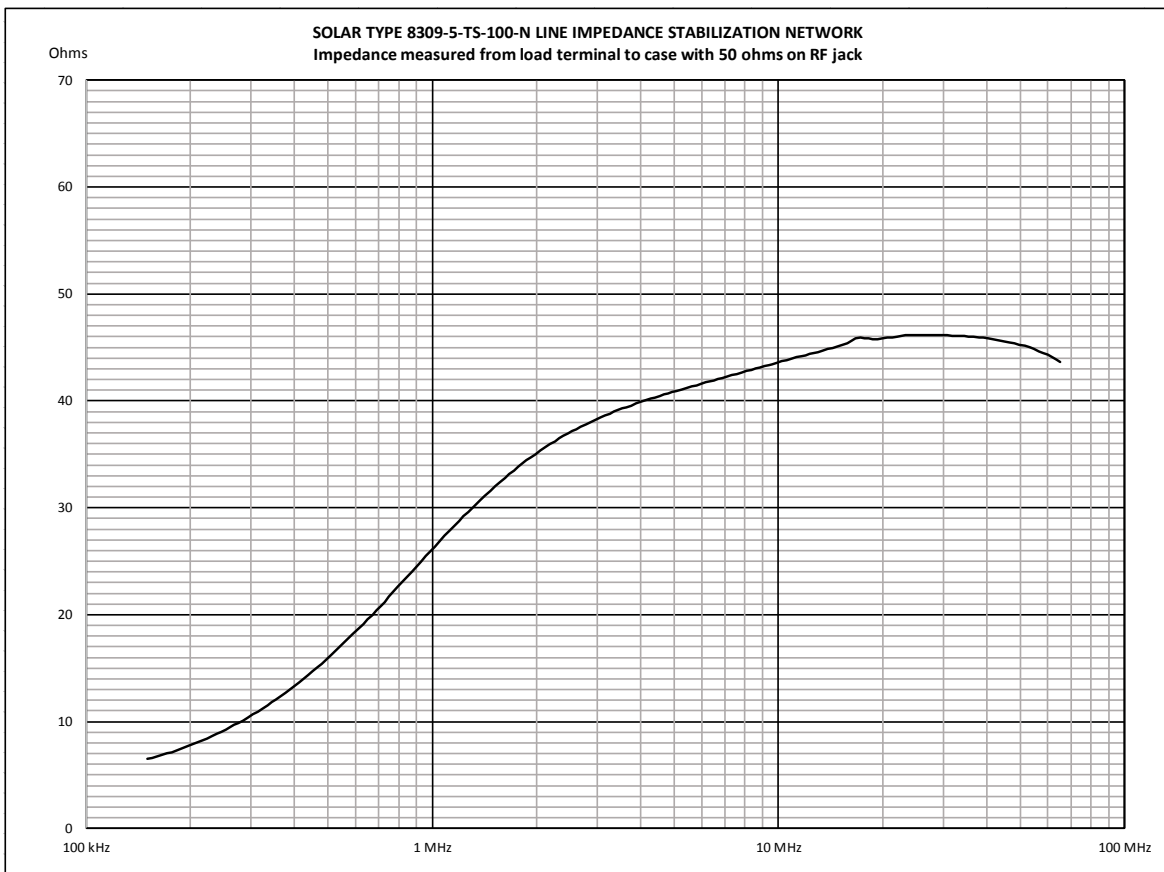

SOLAR ELECTRONICS COMPANY

A Division of A. T. Parker, Inc.

10866 Chandler Boulevard, North Hollywood, CA 91601 818-755-1700 sales@solar-emc.com