


## Quick Fact Sheet

### Agilent 33210A/20A/50A Function/Arbitrary Waveform Generators

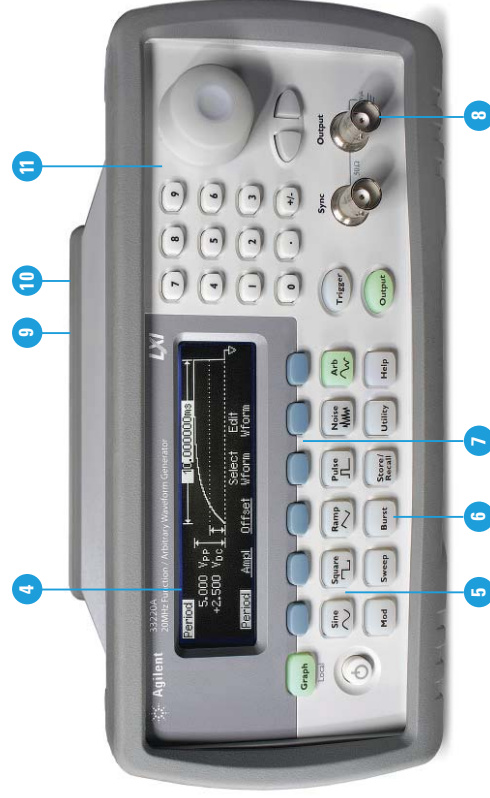

#### Key features

- Standard waveforms included: sine, square, pulse, noise, ramp, DC, triangle
- Arbitrary waveforms with up to 64 K-points of memory. 33210A has an optional 8K point arbitrary waveform generator.
- Standard modulations AM and FM on all instruments, FSK, PWM and PM on select models
- Linear/log sweep and burst
- Free IntuiLink Arbitrary Waveform Software

1. 33210A Function/Arbitrary Waveform Generator, 10 MHz
2. 33220A Function/Arbitrary Waveform Generator, 20 MHz
3. 33250A Function/Arbitrary Waveform Generator, 80 MHz
4. Graphic display for viewing and editing waveforms
5. One touch buttons for the standard waveforms
6. One touch buttons for modulation
7. Soft keys for setting parameters
8. Programmable output for matching load impedance
9. External reference time base input (33210A/20A Option 001)
10. Computer interfaces: GPIB, 33210A/20A provides USB and LAN (LXI)
11. SCPI programming language, PC SW and drivers included



Agilent Technologies

Anticipate — Accelerate — Achieve

## Quick Fact Sheet

### Agilent 33210A/20A/50A Function/Arbitrary Waveform Generators


	33210A	33220A	33250A
Frequency range (sine and square)	1 MHz to 10 MHz	1 $\mu$ Hz to 20 MHz	1 $\mu$ Hz to 80 MHz
Arb resolution and sample rate	14-bit, 50 MSa/s (Option 002)	14-bit, 50 MSa/s	12-bit, 200 MSa/s
Harmonic distortion	-70 dBc (DC to 20 kHz)		-60 dBc (DC to 1 MHz)
Linear ramp rate	Up to 100 kHz	Up to 200 kHz	Up to 1 MHz
Phase noise	-115 dBc/Hz		< -65 dBc (10 MHz)
Square wave duty cycle		20% to 80%	
Pulse frequency range	1 MHz to 5 MHz	500 $\mu$ Hz to 5 MHz	500 $\mu$ Hz to 50 MHz
Modulation carrier waveforms	Sine, square	Sine, square, ramp, and arb	
Modulation capability	AM, FM, PWM, Burst	AM, FM, PM, FSK, Burst, PWM	AM, FM, FSK, Burst
Amplitude range		10 mVpp to 10 Vpp into 50 $\Omega$ load	
Amplitude accuracy	$\pm 2\%$ , $\pm 1$ mVpp		$\pm 1\%$ , $\pm 1$ mVpp
Frequency accuracy	20 ppm + 3 phz		2 ppm
External timebase reference	Option 001		Standard
Interface		GPIO, LAN, USB	GPIO, RS-232

### 34970A/34972A plug-in modules

Part	Description
33210A Option 001	External timebase reference
33210A Option 002	8K point Arbitrary Waveform Generator
33220A Option 001	External timebase reference
34131A	Carrying case
34161A	Accessory pouch
34190A	Rack mount kit (1/2 width)
10833A/B/C/D/F/G	GPIO cable
82350B	PCI high-performance GPIO card
82351A	PCIe-GPIO interface card
82357B	USB/GPIO interface (33250A only)
E5813A	Networked 5-port USB hub (33250A only)
E5810A	GPIO to LAN gateway (33250A only)

#### Recommended service options

Additional two years of Return-to-Agilent warranty  
 Additional two years of Return-to-Agilent calibrations  
 For more information go to [www.agilent.com/find/removealldoubt](http://www.agilent.com/find/removealldoubt)

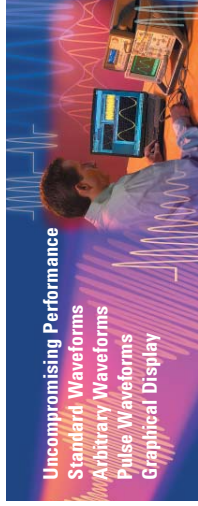

Uncompromising Performance  
 Standard Waveforms  
 Arbitrary Waveforms  
 Pulse Waveforms  
 Graphical Display

Technical data, availability, and pricing subject to change without notice.  
 © Agilent Technologies, Inc. 2012. Printed in USA, February 10, 2012  
 5989-8708EN



Agilent Technologies