




DP 600

DP Range: 10 kHz - 250 MHz / 600 W CW

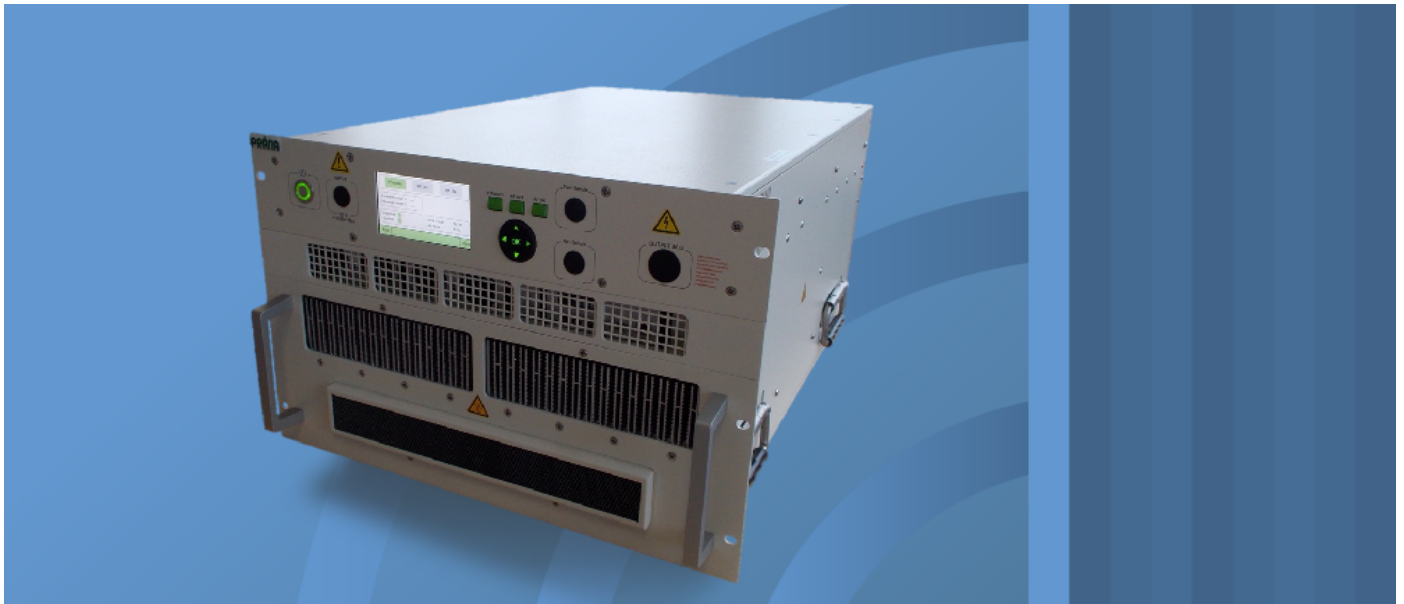

Prana DP 600

- Class A solid state
- Broadband (instantaneous single band): 10 kHz – 250 MHz
- Typical output power : 600 W CW
- Linear output power (1 dB compression) guaranteed with harmonics <-20 dBc:
 - P1dB >400 W and H <-20 dBc
- Air cooling: self contained fans
- Can operate in full mismatch conditions without damage
- Reliable, efficient and robust
- 19" Rack
- 3 years standard warranty

Maintenance

- Amplifier designed for minimal maintenance
 - Easy access to all parts
 - Modular design
 - Repairs with minimum adjustments
- Rapid diagnostic
- Minimal downtime
- Contract for preventive and corrective maintenance available

Applications

- EMC tests
- RF tests and instrumentation
- Radiocommunication
- Measurement and research laboratories

Versions

- DP 600 D amplifier with:
 - Multicolor LCD display with touch panel
 - Digital control
 - IEEE 488 GPIB, Ethernet, USB, RS232 Communications
 - Temperature controlled fans
 - Safety interlock
- DP 600 DC : DP 600 D with :
 - Integrated dual directional coupler
 - Display of instantaneous incident and reflected power

DP Range

- DP 70 => 70 W CW
- DP 140 => 140 W CW
- DP 300 => 300 W CW
- DP 600 => 600 W CW
- DP 1300 => 1300 W CW
- DP 2500 => 2500 W CW
- DP 5000 => 5000 W CW

Extra

- External coupler
- Supply and integration inside a cabinet
- Bulk Current Injection + Calibration JIG
- RF Power cable
- Switching unit

North America Sales, Service & Support:



8526 Virginia Meadows Drive
Manassas, VA 20109
Ph: (703) 365-2330
www.hvtechnologies.com
emcsales@hvtechnologies.com


DP60015SEP2017 - Electrical and Mechanical Specifications subject to change without notice.

PRANA R&D - 52 Avenue de la Libération CS 10161 - 19361 MALEMORT Cedex - France
Tel : 33(0)5 55 86 49 40 - Fax : 33(0)5 55 86 49 45



www.prana-rd.com
Made in France

DP600 POWER AMPLIFIER 500W / 10 KHz - 250MHz

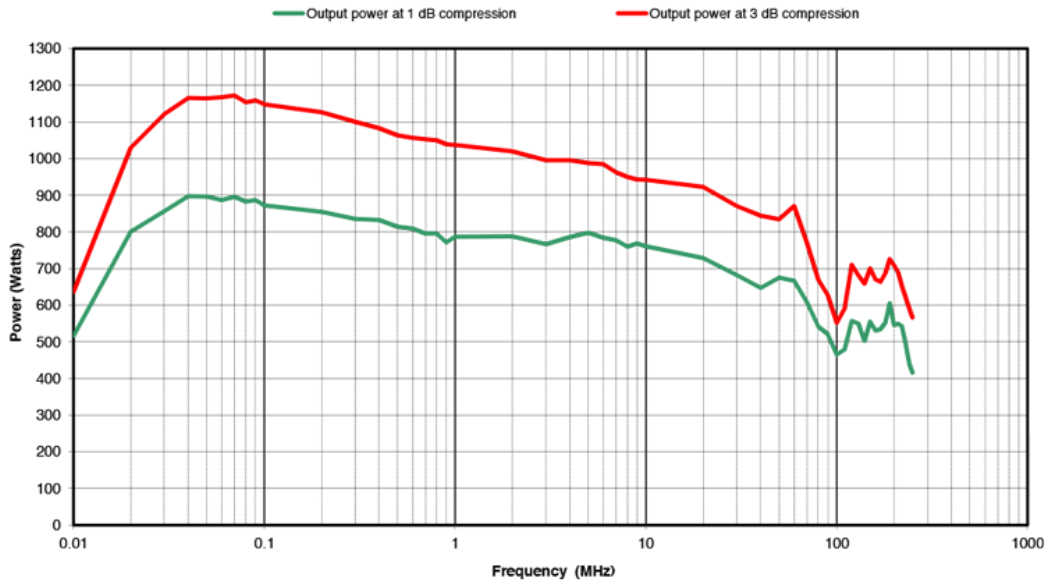

Specifications

Frequency bandwidth	10 kHz - 250 MHz
Typical output power	600 W
Power at 3 dB compression	500 W min
Power at 1 dB compression	400 W min
Harmonics distortion	H2,H3 < -20 dBc for the output power at 1 dB compression limit
Class type	Class A
Gain	57 dB
Linear power gain flatness	± 3 dB max
Mismatch tolerance	infinite without damage
Input impedance	50 ohms / VSWR: 2:1 max
Output impedance	50 ohms / VSWR: 2:1 max
Input power	+10 dBm max.
RF input connector	Type N fem. (front or rear panel) – other connector type on request
RF output connector	Type N fem. (front or rear panel) – other connector type on request
Safety interlock	Connector type BNC
Digital control	Transistors, power supplies, temperatures, fans
Communication interface	Ethernet, USB, GPIB, RS232
Color LCD Display with touch screen	Status, faults, (direct and reverse instantaneous power for DC version)
Ambient operating temperature	0 °C / + 35 °C
Room temperature storage	-20 °C / +70 °C
Cooling	Forced air with fan speed control: 120 l/sec max. (self contained fans)
Power voltage	200-250 VAC, 47-63 Hz, single phase
Rated current	11.3 A at 230 VAC
Dimensions	640 x 450 x 360 mm (8U) / 25.2 x 17.7 x 14.2 in (8U)
Weight	51 kg / 112 lb

DP 600 DC version :

Integrated bidirectional power coupler	Coupling factor 59 dB typ.
Power coupling connector	Type N fem. (rear panel)
Estimated output power losses due to the coupler	0.5 dB

North America Sales, Service & Support:



8526 Virginia Meadows Drive
 Manassas, VA 20109
 Ph: (703) 365-2330
www.hvtechnologies.com
emcsales@hvtechnologies.com

DP60015SEP2017 - Electrical and Mechanical Specifications subject to change without notice.