



SOLAR ELECTRONICS CO.


LINE IMPEDANCE STABILIZATION NETWORK

TYPE 9622-50-BP-10-BNC

CURRENT RATING 10 Amperes
 IMPEDANCE 50 uH
 RECOMMENDED FREQUENCY RANGE 10 kHz - 50 MHz
 VOLTAGE (line to ground) 270 V., 50 - 60 Hz, 120 V., 400 Hz
 POWER CONNECTIONS 3/4" Standard Binding Post
 RF CONNECTOR Type "BNC"
 COUPLING CAPACITOR 0.25 uF
 CIRCUIT Single
 CASE SIZE 4.5" (11.43cm) X 4.5" (11.43cm) X 9.25" (23.5cm)

REMARKS: Designed for **FCC part 15, ANSI C63.4-1992, CISPR PUB 16-1987** (150 kHz - 30 MHz) **Mil-Std-461D.**

.....

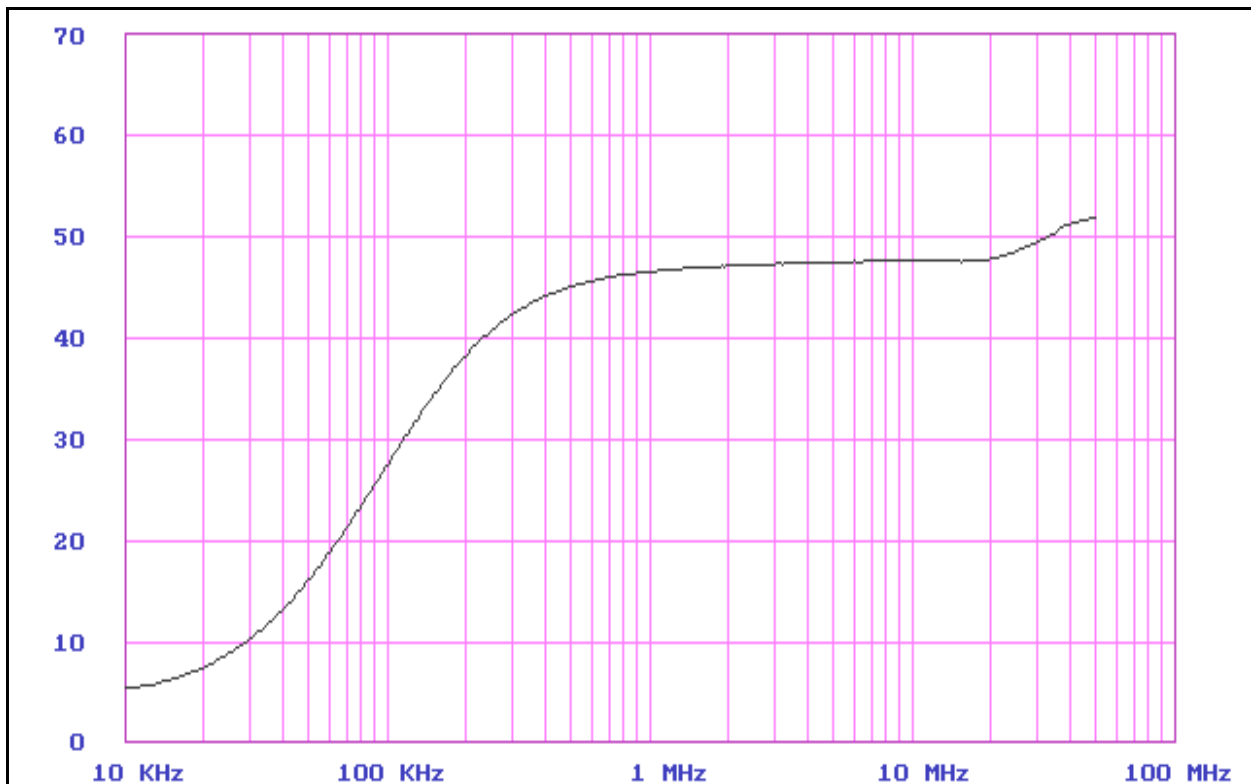

Typical Impedance in a 50 ohm circuit