


Bulk Current Injection Probe



The F-120-9A has been designed to extend the use of conducted immunity testing over the bandwidth of 10 kHz – 230 MHz. The useable frequency range is 10 kHz - 230 MHz with an insertion loss of less than 8 dB between 150 kHz – 200 MHz. The input power rating is 100 watts for 30 minutes.

Typical Data

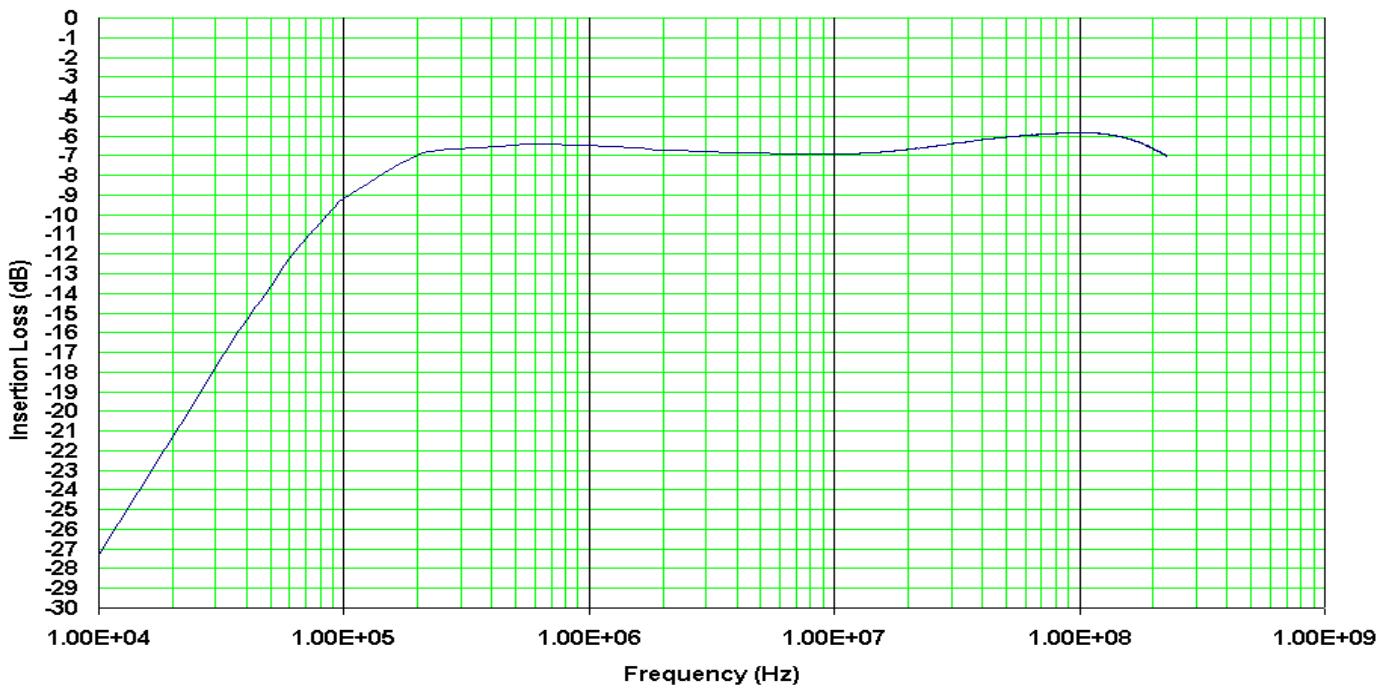

F-120-9A

F-120-9A Specifications

Frequency: 10 kHz – 230 MHz
 Inner Diameter: 40mm
 Outer diameter: 127mm
 Height: 134mm
 Input Power rating: 100 watts

Accessories

FCC-BCICF-4 • Calibration Fixture
 Bandwidth: 10 kHz – 230 MHz
 F-52-40mm • Current Probe
 Bandwidth: 10 kHz – 400 MHz



Fischer Custom Communications, Inc.

20603 Earl St., Torrance, CA 90503 • Phone: 310-303-3300 Fax 310-371-6268 • email: Sales@fischercc.com