




Advanced Test Equipment Corp.

www.atecorp.com 800-404-ATEC (2832)

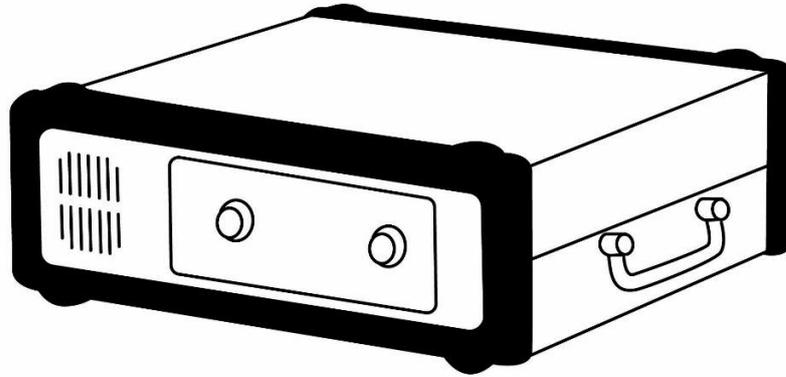

Gasmeter DX4000

Gasmeter DX4000 is a portable FTIR gas analyzer designed for short term on-site measurements with wide dynamic ranges. It is an ideal tool to measure trace concentrations of pollutants in wet, corrosive gas streams. The sample cell can be heated up to 180 °C. Sample cell absorption path length is selected according to the application.

Gasmeter Technologies Oy

STREET ADDRESS:
Mestarintie 6
01730 Vantaa, Finland

TEL: +358 9 7590 0400
EMAIL: contact@gasmeter.fi

WEB: www.gasmeter.com
VAT NO: FI26818038

System specifications

Measuring principle	Fourier transform infrared, FTIR
Multigas capability	Simultaneous analysis of up to 50 gas compounds
Response Time	Typically < 120 s
Power supply	115 / 230 V 50 / 60Hz Power consumption: Average 150 W, maximum 300 W
Analysis Software	Calcmnet (Required operating system Windows 7 or 10)
Data Connection	9-pole D-connector for RS-232 Analyzer is connected to an external computer via RS-232C cable. The external computer controls Gasmet. Remote control connection for Portable sampling unit.
Sample pump	Recommended: Gasmet PSS
Sample gas filtration	Minimum 2 µm particulate filtration. Recommended: Gasmet PSS with standard filter.
Gas fittings	Sample in: 6 mm Swagelok, stainless steel Sample out: 8 mm Swagelok, stainless steel Interferometer purge: 6 mm Swagelok stainless steel
Enclosure	Dimensions: 390 x 445 x 164 mm Material: Aluminum
Weight	13.9 kg
Product compliance	CE, UKCA
Spectrometer	Resolution: 4/8 cm ⁻¹ Detector: Thermoelectrically cooled MCT Beamsplitter: Antireflection coated ZnSe Wave number range: 900 - 4 200 cm ⁻¹
Sample cell	Structure: Multi-pass, path length 5.0 m Material: Goldcoated aluminum Mirrors: Fixed, protected gold coating Volume: 0.4 liters Temperature: 180 °C, maximum

Operating and storage conditions

Sample gas pressure	Ambient
Sample gas flow rate	2 – 10 l/min
Storage temperature	-20 to 60 °C, non-condensing
Operating temperature	Long term 5 to 30 °C, short term 0 to 40 °C

Performance specifications

Zero-point drift	< 2 % of measuring range per zero-point calibration interval
Sensitivity drift	None
Linearity deviation	< 2 % of measuring range
Temperature drift	< 2 % of measuring range per 10 K temperature change
Pressure influence	1 % change of measuring value for 1 % sample pressure change. Ambient pressure changes measured and compensated



V1.13

Background measurement interval

24 hours, with nitrogen (5.0 or higher N₂ recommended)

Zero gas

Nitrogen (5.0 or higher purity)

Gasmeter Technologies Oy shall not be liable for technical or editorial errors or omissions contained herein. The information in this document is provided "as is" without warranty of any kind and is subject to change without notice. Should you find any errors, we would appreciate if you notified us.

Gasmeter Technologies Oy

STREET ADDRESS:
Mestarintie 6
01730 Vantaa, Finland

TEL: +358 9 7590 0400
EMAIL: contact@gasmeter.fi

WEB: www.gasmeter.com
VAT NO: FI26818038