



Model Number 333B52	<b>ICP® ACCELEROMETER</b>	Revision: E ECN #: 45641
------------------------	---------------------------	-----------------------------

	ENGLISH	SI	
<b>Performance</b>			
Sensitivity(± 10 %)	1000 mV/g	102 mV/(m/s <sup>2</sup> )	
Measurement Range	± 5 g pk	± 49 m/s <sup>2</sup> pk	
Frequency Range(± 5 %)	0.5 to 3000 Hz	0.5 to 3000 Hz	
Resonant Frequency	≥ 20 kHz	≥ 20 kHz	
Phase Response(± 5 °)(at 70°F [21°C])	2.5 to 3000 Hz	2.5 to 3000 Hz	
Broadband Resolution(1 to 10,000 Hz)	0.00005 g rms	0.0005 m/s <sup>2</sup> rms	[1]
Non-Linearity	≤ 1 %	≤ 1 %	[2]
Transverse Sensitivity	≤ 5 %	≤ 5 %	[3]
<b>Environmental</b>			
Overload Limit	± 4000 g pk	± 39,000 m/s <sup>2</sup> pk	
Temperature Range	0 to +150 °F	-18 to +66 °C	
Temperature Response	See Graph	See Graph	[1]
Base Strain Sensitivity	0.01 g/µε	0.1 (m/s <sup>2</sup> )/µε	[1]
<b>Electrical</b>			
Excitation Voltage	18 to 30 VDC	18 to 30 VDC	
Constant Current Excitation	2 to 20 mA	2 to 20 mA	
Output Impedance	≤ 500 Ohm	≤ 500 Ohm	
Output Bias Voltage	7 to 12 VDC	7 to 12 VDC	
Discharge Time Constant	0.7 to 2.0 sec	0.7 to 2.0 sec	
Settling Time(within 10% of bias)	<10 sec	<10 sec	
Spectral Noise(10 Hz)	3.8 µg/√Hz	37 (µm/sec <sup>2</sup> )/√Hz	[1]
Spectral Noise(100 Hz)	1.1 µg/√Hz	11 (µm/sec <sup>2</sup> )/√Hz	[1]
Spectral Noise(1 kHz)	0.4 µg/√Hz	3.9 (µm/sec <sup>2</sup> )/√Hz	[1]
Spectral Noise(1 Hz)	15 µg/√Hz	150 (µm/sec <sup>2</sup> )/√Hz	[1]
<b>Physical</b>			
Size (Height x Length x Width)	0.45 in x 0.68 in x 0.45 in	11.4 mm x 17.3 mm x 11.4 mm	
Weight	0.26 oz	7.5 gm	[1]
Sensing Element	Ceramic	Ceramic	
Sensing Geometry	Shear	Shear	
Housing Material	Titanium	Titanium	
Sealing	Hermetic	Hermetic	
Electrical Connector	10-32 Coaxial Jack	10-32 Coaxial Jack	
Electrical Connection Position	Side	Side	
Mounting	Adhesive	Adhesive	

**OPTIONAL VERSIONS**

Optional versions have identical specifications and accessories as listed for the standard model except where noted below. More than one option may be used.

T - TEDS Capable of Digital Memory and Communication Compliant with IEEE P1451.4  
 TLA - TEDS LMS International - Free Format  
 TLB - TEDS LMS International - Automotive Format  
 TLC - TEDS LMS International - Aeronautical Format  
 TLD - TEDS Capable of Digital Memory and Communication Compliant with IEEE 1451.4


Output Bias Voltage	7.5 to 13 VDC	7.5 to 13 VDC
---------------------	---------------	---------------

**NOTES:**

[1]Typical.  
 [2]Zero-based, least-squares, straight line method.  
 [3]Transverse sensitivity is typically ≤ 3%.  
 [4]See PCB Declaration of Conformance PS023 for details.

**SUPPLIED ACCESSORIES:**

Model 080A109 Petro Wax (1)  
 Model 080A90 Quick Bonding Gel (1)  
 Model ACS-1 NIST traceable frequency response (10 Hz to upper 5% point). (1)

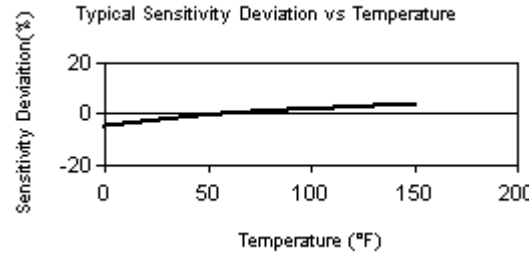

Entered: LK	Engineer: BAM	Sales: WDC	Approved: BAM	Spec Number:
Date: 7/7/2016	Date: 7/7/2016	Date: 7/7/2016	Date: 7/7/2016	11869

All specifications are at room temperature unless otherwise specified.  
 In the interest of constant product improvement, we reserve the right to change specifications without notice.  
 ICP® is a registered trademark of PCB Group, Inc.