



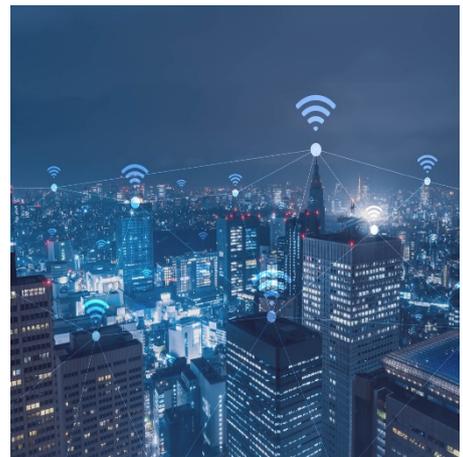

## Model 835 RF/Microwave Signal Generator

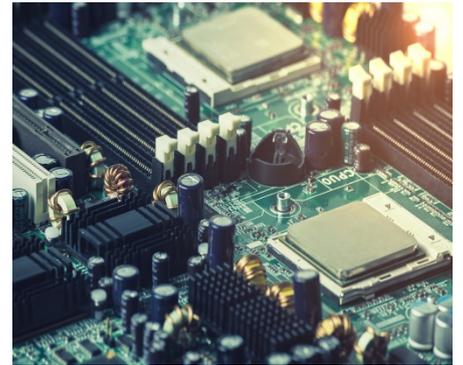

### Features

- High Output Power, Low Phase Noise
- Comprehensive AM, Low-Distortion
- Wideband DC-FM, and High-Speed Pulse Modulation
- Powerful Trigger and Aweeping Modes
- Portable Battery Operation

### Applications

- R&D Low Noise Signal Source
- Production Testing
- Service and Maintenance
- Signal Simulation
- Aerospace and Defense
- Installation and Maintenance



### Model 835 v. 2.24

9 kHz to 6 GHz RF / Microwave Signal Generator

## DEFINITIONS

- The specifications in the following pages describe the warranted performance of the instrument for  $23 \pm 5$  °C after a 30-minute warm-up period (unless otherwise stated).

**Min/Max:** Parameter range that is guaranteed by product design, and/or production tested. Warranted performance specifications include guard-bands to account for the expected statistical performance distribution, measurement uncertainties, and changes in performance due to environmental conditions.

**Typical:** Expected mean values, not warranted performance.

## INTRODUCTION

- **Model 835 models comprises a set of very compact, portable analog signal generator models from 9 kHz up to 6100 MHz. A combination of good signal purity, fast switching speed and wide dynamic range makes these units useful for a variety of applications.**

The Model 835 is a series of a low-noise and fast-switching analogue signal generator covering a frequency range from 9 kHz up to 4.0, and 6.1 GHz, respectively.

The Model 835 provides full RF signal generator capabilities including OCXO-stabilized low phase-noise signal with micro-Hz frequency resolution, wide and accurately levelled output power range, extensive modulation capabilities, and fast switching.

It is targeted for a wide range of applications where a high-quality analogue signal is mandatory, offering an alternative to expensive high-end RF signal generators, where small size and excellent RF performance at an attractive cost is required.

The very compact and rugged design of the Model 835 operates at very low DC power consumption (only 12 watts), with minor heat dissipation and not requiring noisy fan. This gives the Model 835 a great advantage in laboratories or production test facilities.

The low power design allows the use of optional internal battery modules which make it a truly portable instrument, ideally suited for field testing, installation, and maintenance.

Available Options:

- **Option PE3** is an optional power level extension to accurately level below -120 dBm.
- **Option B3** adds an internal rechargeable battery module
- **Option AVIO** adds dedicated avionics modulation like VOR/ILS
- **Option 1URM** modifies form-factor to a 19" rack-mountable 1U enclosure
- **Option EB6** adds an external power bank adapter cable with voltage converter for 12 to 25 V supply

The Model 835 support various standard interfaces such as USB (USBTMC), LAN (VXI-11), or GPIB and extensive API with programming examples are available.

# SPECIFICATIONS

PARAMETER	MIN	TYPICAL	MAX	NOTE
<b>Frequencyrange</b>	9 kHz		4.0 GHz 6.1 GHz	<b>835-4</b> <b>835-6</b>
resolution		0.001 Hz		
Phase resolution		0.1 deg		
Settling time		20 $\mu$ s 20 $\mu$ s	100 $\mu$ s 200 $\mu$ s	$\leq$ SN xx-xxx2xxxxx-xxxx $\geq$ SN xx-xxx3xxxxx-xxxx
Frequency update rate		400 $\mu$ s		time from receipt of SCPI command firmware
List/Sweep mode		400 $\mu$ s		
<b>SSB Phase noise at 1 GHz</b>				
at 20 kHz from carrier		-130 dBc/Hz		See measured phase noise plots
<b>Total jitter</b>		68 fs RMS		10 Hz to 1 MHz BW
<b>Spectral purity</b>				
Output harmonics		-40 dBc	-30 dBc	$P_{out} = +10$ dBm
Sub-harmonics		-80 dBc	-70 dBc	
Non-harmonic spurious				
< 1 MHz		-70 dBc	-60 dBc	$P_{out} = +10$ dBm
> 1 MHz		-75 dBc	-65 dBc	
Residual FM @ 1 GHz			3 Hz	0.3 kHz to 3 kHz, weighted (ITU-T)
			12 Hz	0.03 kHz to 23 kHz
<b>Power level</b>				
Range (>10 MHz)				See plots on page 8
Without Option PE3	-30 dBm		+18 dBm +10 dBm	>50 MHz < 50 MHz
With Option PE3	-120 dBm		+17 dBm +10 dBm	>50 MHz < 50 MHz
Resolution		0.01 dB		
Level uncertainty		0.3 dB 0.5 dB 1.8 dB	< 0.8 dB < 1.3 dB	-20 to + 10 dBm -80 to -20 dBm < -80 dBm
Output impedance		50 $\Omega$		
VSWR		1.5 1.7	1.8 2.0	< 3 GHz > 3 GHz
<b>Reference frequency input</b>	8 MHz		200 MHz	User programmable
Reference inputlevel	-5 dBm	0 dBm	+13 dBm	
Lock Range			+/- 1.0 ppm	
Reference inputimpedance		50 $\Omega$		
<b>Internal referencefrequencyoutput</b>		10 MHz		

Initial accuracy of internal reference		±40 ppb		calibrated at 23 ± 3 °C at time of calibration
Temperature stability (0 to 50 degC)			±100 ppb	
Aging 1 <sup>st</sup> year		0.5 ppm		
Aging per day (after 30days operations)			5 ppb	
Warm-Up time		5 min		
Output of internal reference		+0dBm 50 Ω		
<b>Reverse Power Protection</b>				
DC Voltage		30 V		
RF power			36 dBm	
<b>Dimensions</b>				
Excludingconnectors	W x L x H = 6.78 x 9.85 x 4.18 in W x L x H = 172 x 250 x 106 mm			
Includingconnectors	W x L x H = 6.78 x 10.75 x 4.18 in W x L x H = 172 x 273 x 106 mm			



## Sweeping Capability

Sweeps can be performed with combined internal or external AM/FM/PM/pulse modulation running. With modulation enabled, the minimum step time increases to 2 ms.

PARAMETER	MIN	TYPICAL	MAX	NOTE
<b>Frequency sweep</b>				
Sweep type: linear, logarithmic, random				
Step time ( $t_{step}$ )	400 μs		19998 s	
Dwell time ( $t_{dwell}$ )	50 μs		9999 s	
Off-time (incl. transient time) ( $t_{off}$ )	0 / 50 μs		9999 s	
Timing accuracy per point		1 μs		
<b>Generalized list sweep</b>				
allows individual setting of frequency, power, dwell-time, and off-time for each point				
List size	2		20.000	
Step time ( $t_{step}$ )	200 μs		19998 s	
Dwell time ( $t_{dwell}$ )	50 μs		9999 s	
Off-time (incl. transient time) ( $t_{off}$ )	0 / 50 μs		9999 s	
Time resolution		0.1 μs		
Timing accuracy per point		1 μs		
<b>Frequency Chirps</b>				
(linear ramp, up/down)				
Bandwidth			10%	

Dwell time (tdwell)	10 ns		100 $\mu$ s	
Numberoffrequencies			20,000	



## Modulation Capabilities

All modulation types (FM, PM, AM, and pulse modulation) may be simultaneously enabled except: FM and phase modulation cannot be combined. For example, AM and FM can run concurrently and will modulate the output RF.

PARAMETER	MIN	TYPICAL	MAX	NOTE
<b>Pulse modulation</b>				
On/off ratio		70 dB		
Repetition frequency	DC		33 MHz	
Pulse width	30 ns 50 $\mu$ s		20 s 20 s	ALC hold ALC on
Pulse rise/fall time		5 ns		
Pulse trainslength (pulses)	2		4192	
Video crosstalk		-40 dB		
External input threshold	0.85 V	0.9 V	0.95 V	TTL compatible
External input voltage range	-0.5 V		+5.5 V	TTL compatible
External input hysteresis		60 mV		
Delay (to RF)		20 ns	40 ns	
<b>Frequency modulation</b>				
Maximum Frequency deviation (peak)		> 2 MHz N x 100 MHz		< 0.37 GHz 0.37 GHz to 0.75 GHz (N=0.125) 0.75 GHz to 1.5 GHz (N=0.25) 1.5 GHz to 3 GHz (N=0.5) > 3 GHz to 6.1 GHz (N=1)
Modulation waveforms	Sine, triangle, FSK			
Modulation rate	1 Hz/DC		800 kHz	-3dB frequency response Max. phase deviation degrades above 20 kHz modulation rate
External input sensitivity	< N · 100 MHz for 1 Vpp			settable in AC mode discrete values in DC mode
Total harmonicdistortion	< 1%			1 kHz rate & N · 100 kHz deviation
<b>Phase modulation</b>				
Phase deviation (peak)	0		N·80 rad	
Modulation rate	1 Hz		800 kHz	> -3dB frequency response
Modulation waveforms	Sine, triangle, FSK			
External Input sensitivity	N · 40 radfor 1 Vpp			
Total harmonicdistortion	< 1%			1 kHz rate & N · 20 rad deviation
<b>Amplitude modulation</b>				
Modulation rate	10 Hz 10 Hz		20 kHz 50 kHz	applies for internal and external >= SN xx-xxx5xxxxx-xxxx
Modulation depth	0 %		95 %	

Modulation waveforms	Sine, triangle, square		
Distortion		2 %	
Accuracy		3 %	
External inputsensitivity	X % per 1 Vpp		settable

### Avionics Modulation (option AVIO)

ILS		
Localizer RF frequency	108 to 112 MHz	
Nominal tone frequencies	90 & 150 Hz	
Frequency accuracy	< 0.02 Hz	
Centerline (in %)	DDM: $0 \pm 0.1$ ; SDM: $40 \pm 2.0$	
Fly left (in %)	DDM: $15.5 \pm 0.5$ ; SDM: $40 \pm 2.0$	
Fly right (in %)	DDM: $-15.5 \pm 0.5$ ; SDM: $40 \pm 2.0$	
Flag (in %)	DDM: $0 \pm 0.1$ ; SDM: $30 \pm 2.0$	
Glide Path RF frequency	328.6-335.4 MHz	
Angle of Descent (in %)	DDM: $0 \pm 0.1$ ; SDM: $80 \pm 3.0$	
Fly up (in %)	DDM: $17.5 \pm 0.5$ ; SDM: $80 \pm 3.0$	
Fly down (in %)	DDM: $-17.5 \pm 0.5$ ; SDM: $80 \pm 3.0$	
Flag (in %)	DDM: $0 \pm 0.1$ ; SDM: $70 \pm 2.5$	
VOR RF frequency	108 - 118 MHz	
Subcarrier Frequency	$9960 \pm 2.0$ Hz	
FM deviation	480 Hz	
AM tone	$30 \pm 0.02$ Hz	
Bearing north	TDM: $30 \pm 2.0$ % Phase: $180 \pm 0.5$ deg	
Bearing south	TDM: $30 \pm 2.0$ % Phase: $90 \pm 0.5$ deg	
Bearing east	TDM: $30 \pm 2.0$ % Phase: $0 \pm 0.5$ deg	
Bearing west	TDM: $30 \pm 2.0$ % Phase: $270 \pm 0.5$ deg	
Test 1	TDM: $20 \pm 1.5$ % Phase: $0 \pm 0.5$ deg	
Test 2	TDM: $40 \pm 2.0$ % Phase: $0 \pm 0.5$ deg	



## Multi-Purpose Output (FUNC OUT)

Output is FUNC OUT at rear panel

PARAMETER	MIN	TYPICAL	MAX	NOTE
<b>MULTIFUNCTION GENERATOR</b>				
sine, triangle, square wave				
Frequency range	1 Hz 1 Hz		3 MHz 1 MHz 50 kHz	sine triangle square
Frequency resolution		0.1 Hz		
Output voltage amplitude peak-peak	10 mV	5V	2 V	Sine, triangle Square (CMOS output)
Harmonic distortion		1 %		< 100 kHz, 1 Vpp
Output impedance		50 Ω CMOS		Sine, triangle squarewave

### VIDEO OUTPUT (of internal pulse modulator)

Output		CMOS		
Period	30 ns		50 s	
Pulse Width	15 ns		50 s	
RF delay		10 ns		

### TRIGGER OUT Synchronization mode for multiple sources

Modes	Trigger on sweep start Trigger on each point			
Trigger waveform pulse width		100 ns		




## Trigger (TRIG IN)

Input is TRIG IN at rear panel


PARAMETER	MIN	TYPICAL	MAX	NOTE
Trigger Types	Continuous, single, gated, gated direction			
Trigger Source	RF key, external, bus (GPIB, LAN, USB)			
Trigger Modes	Continuous free run, trigger and run, reset and run			
Trigger latency		tbd		
Trigger uncertainty		5 $\mu$ s		
External Trigger delay	50 $\mu$ s		40 s	
External Delay Resolution		15 ns		
Trigger Modulo	1		255	Execute only on Nth trigger event
Trigger Polarity	Rising, falling			
External trigger input threshold	0.85 V	0.9 V	0.95 V	TTL compatible
External trigger input voltage range	-0.5 V		+5.5 V	TTL compatible
External trigger input hysteresis		60 mV		

# PERFORMANCE CURVES


## Typical Maximum Output Power (without option PE3)

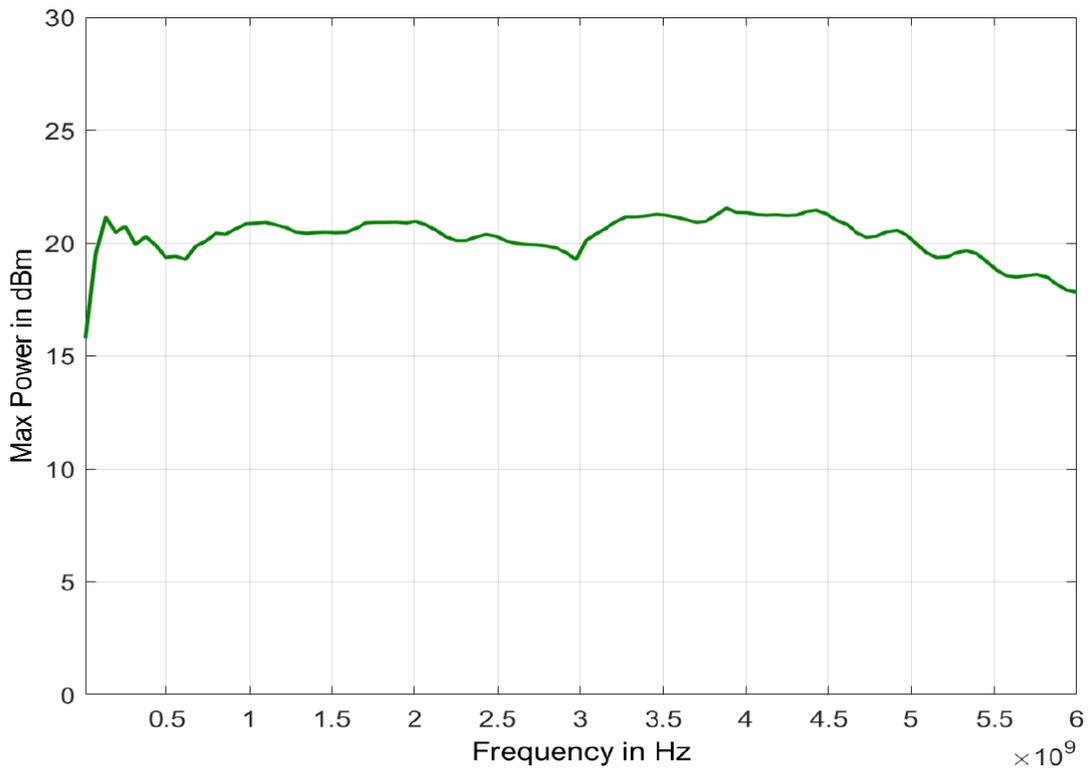


## Typical Maximum Output Power (WITH option PE3)

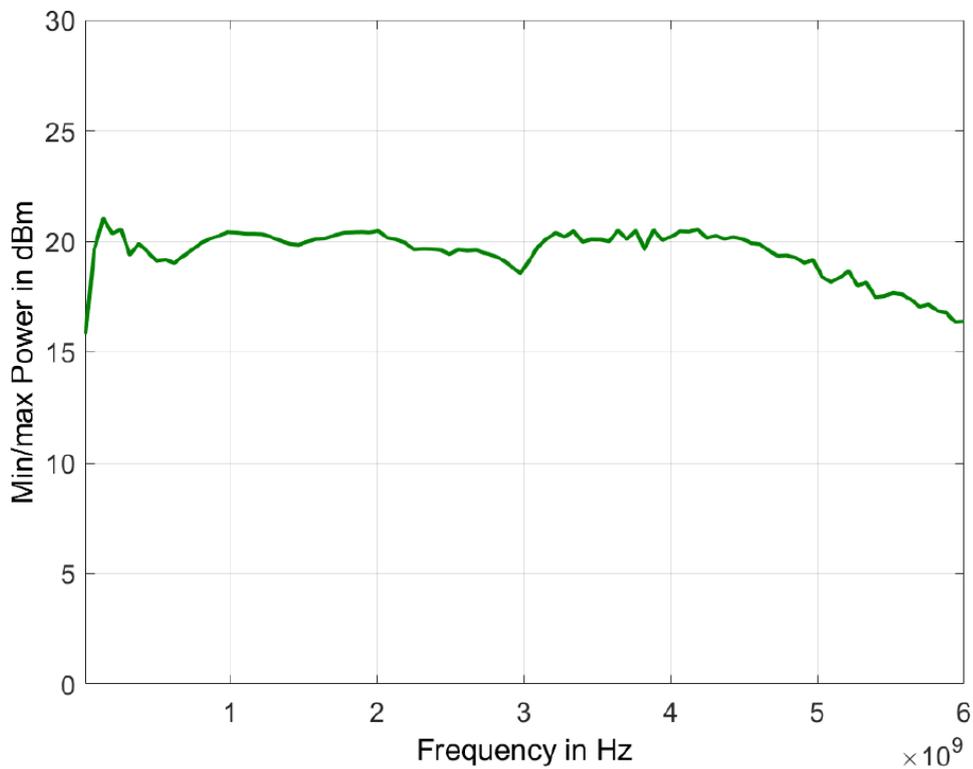

# Phase Noise Performance (1,2 and 4 GHz)

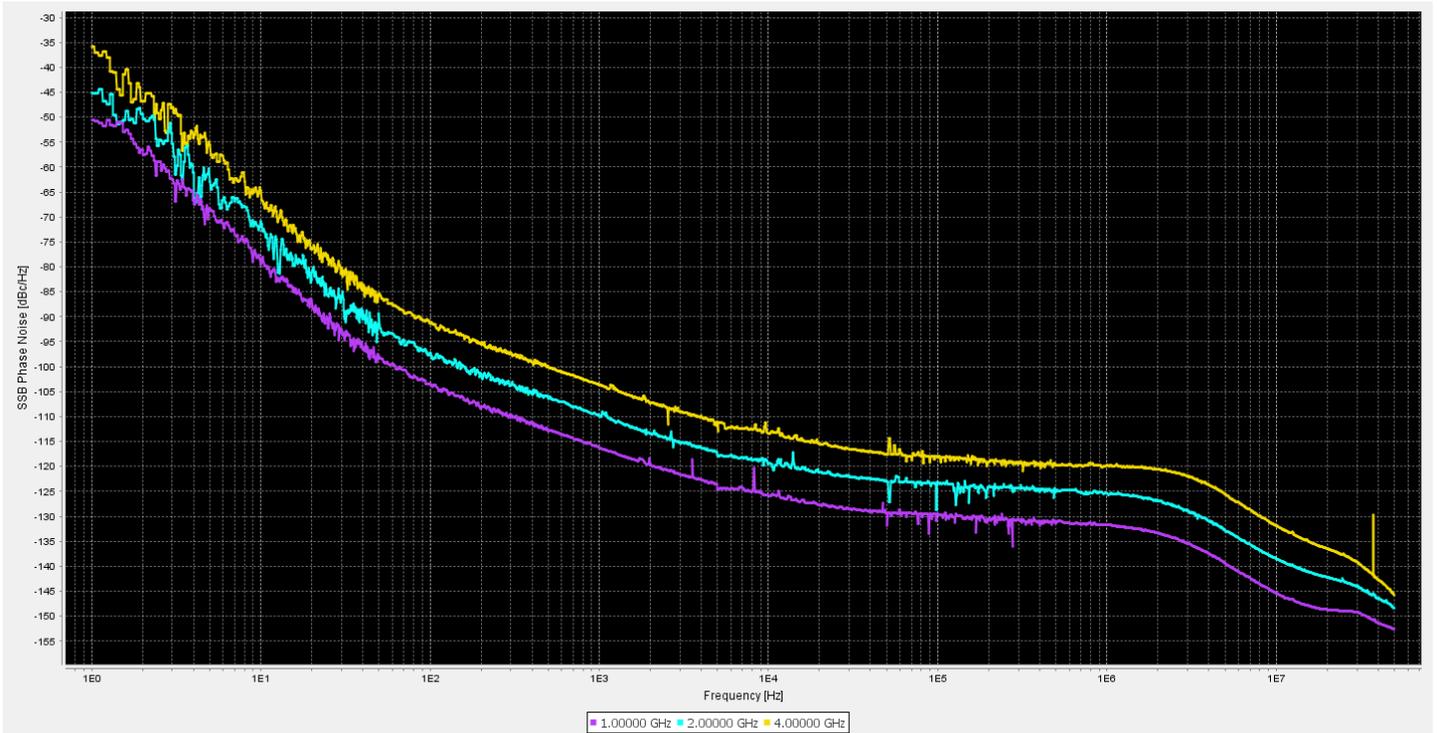

## Harmonic performance at + 10 dBm

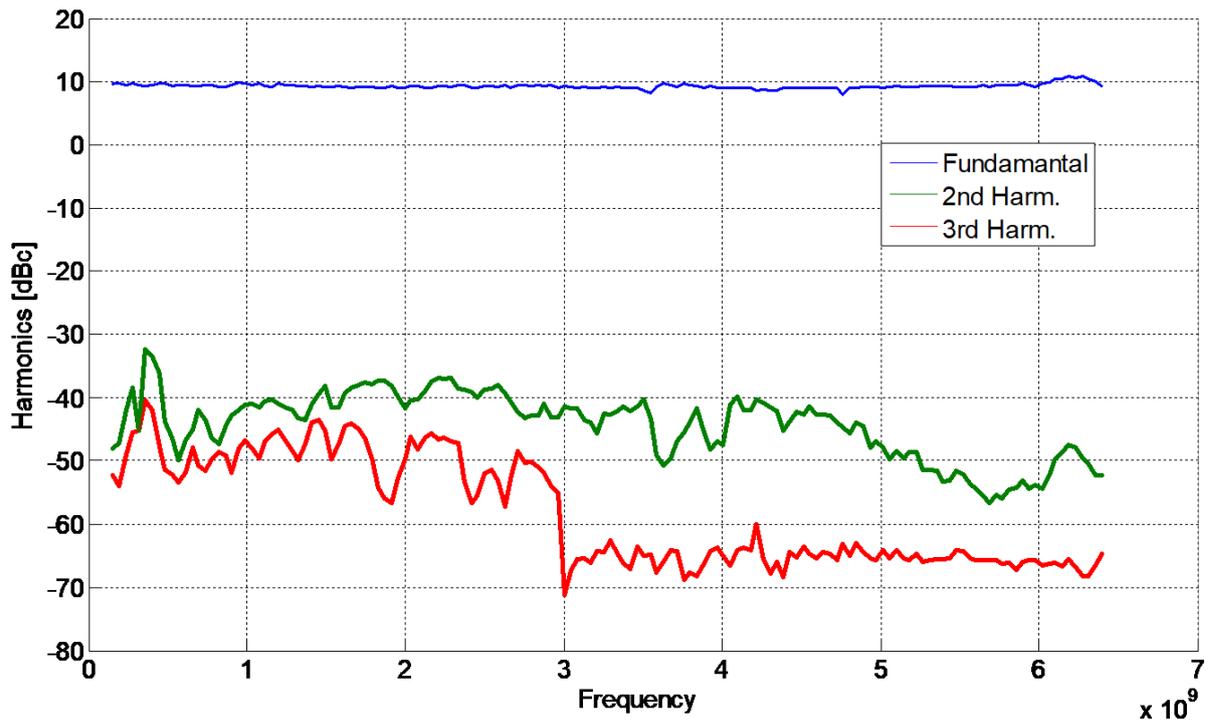


## Connectors (Front)



1. RF output: N female
2. Rotary knob

## Connectors (Rear)

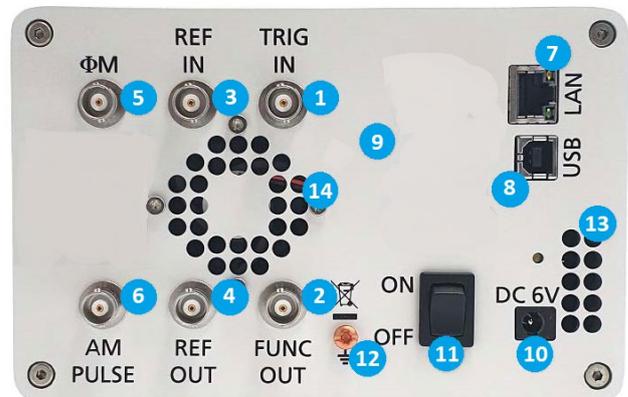

1. Trigger input BNC female
2. Function output BNC female
3. External reference input BNC female
4. Internal reference output BNC female
5. FM/PM modulation input BNC female
6. AM and Pulse modulation BNC female
7. LAN connection RJ-45
8. USB 2.0 device
9. GPIB IEEE-488.2, 1987 with listen and talk (optional)
10. DC Power plug (6V, 6 A)
11. DC power switch
12. Ground Screw
13. Fan Holes The air intake of the fan.
14. Fan Holes The holes by which the air is extruded.

## ORDERING INFORMATION

HOST MODEL	PRODUCT	DESCRIPTION
835	835-4	9 kHz – 4000 MHz Signal Generators
835	835-6	9 kHz – 6100 MHz Signal Generators
835	B3	Internal rechargeable battery module
835	GPIB	GPIB interface 
835	EB6	External power bank adapter cable with voltage converter for 12 to 25 V supply. Required input connector: Inner / outer diameter 2.1 / 5.5 mm 
835	AVIO	Avionics modulation capability (VOR/ILS)
835	1URM	1U rack-mount module  Dimensions: 1.7 in H x 16.8 in W x 18.1 in L [42 mm H x 426 mm W x 460 mm L]
835	REAR	Move output to the rear panel
835	OEM	OEM package
835	WE	One-year warranty extension (standard: 2 years)
835	ReCal	Recalibration with test data (recommended: two years interval)

## GENERAL CHARACTERISTICS

### Remote programming interfaces

Ethernet 100BaseT LAN interface  
USB 2.0 host & device  
GPIB (IEEE-488.2,1987) with listen and talk (optional)  
Control language SCPI Version 1999.0

**Power requirements:** 6 VDC; 20 W maximum

**Mains adapter supplied:** 100-240 VAC in/ 6 V 6.0 A DC out

**Storage temperature range** -40 to 158 F (-40 to 70 °C)

**Operating temperature range** 32 to 113 F (0 to 45 °C)

**Operating and storage altitude** up to 15,000 feet



Safety/EMC complies with applicable Safety and EMC regulations and directives.

**Weight** ≤ 2.5 kg (6 lbs) net, ≤ 4 kg (8 lb.) shipping

### Dimensions:

4.60 in H x 6.83 in W x 10.66 in L (incl. connectors)  
[116.9 mm H x 173.6 mm W x 270.7 mm L]

**Recommended calibration cycle** 24 months

### Compatibility languages supporting commonly used commands

Agilent Technologies N5181A MXG, Aeroflex, Rohde & Schwarz SMA and SML models