



REGENERATIVE BATTERY PACK TEST SYSTEM MODEL 17030

Chroma's 17030 is an automated regenerative test system specifically designed for high power battery pack tests. Accurate power sources and measurements ensure test quality suitable for repetitive and reliable testing of crucial battery packs. Applications include incoming inspections capacity validation, production and certification testing.

Chroma's 17030 system architecture offers regenerative discharging designed to recycle the electric energy sourced by the battery pack. This feature saves electricity, reduces the facilities costs, reduces the thermal foot print and provides a green solution by reducing the environmental impact to the planet.

Chroma's 17030 system include a driving cycle simulation function. Since automotive battery packs are used at quick and irregular intervals, the 17030 includes the capability to create seamless transitions between maximum charge and maximum discharge (or maximum discharge and maximum charge) with a rapid 50 ms conversion.

This feature allows for charge/discharge mode simulations of real world driving scenarios. The system simulates the real conditions on the battery pack in its working condition.

Chroma's 17030 system has flexible programming functions and includes Chroma's powerful Battery Pro software. Battery Pro is a user friendly software environment allowing for the creation of a wide range of test scenarios from basic charge and discharge to complex drive cycle testing. Battery Pro's features allows quick and intuitive test development to eliminate the need for tedious scripting or programming by a software developer.

There are multiple safety features built into the 17030 including battery polarity checks, overvoltage protection, overcurrent protection and over temperature protection. In the unlikely event of a power or computer communication loss, the data is securely stored within the system in non-volatile memory thereby protecting against potential data loss and allowing for continuous flow after restart.

Regenerative Battery Pack Test System

Model 17030

Key Features:


- Supports high power battery certification: IEC, SAE, GB...etc.
- Regenerative battery discharge, Saves energy, environment-friendly and provides low heat dissipation
- Driving cycle simulator
- Industry Leading Accuracy
- 10ms Data acquisition
- Charge / discharge mode
 - Constant Current
 - Constant Voltage
 - Constant Power
- Customized rating power
 - Voltage range : 10~1200V
 - Current range : 0~1000A
 - Power range : 90~350kW
- System Integration:
 - Chamber Control
 - Multi-channels voltage/temperature measurement (Max 192CH)
 - BMS Communication



KEY SYSTEM FEATURES

Regenerative Energy

- Regenerate power to grid, Low heat dissipation, reduce air-conditioner loads and facility power consumption
- THD under 5% at rated power
- The PF over 0.9 at rated power
- Efficiency above 85% when operated above 20% of rated power

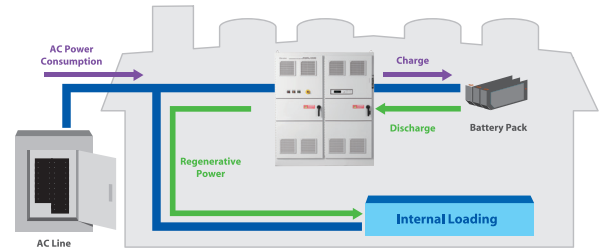


Regenerate the energy to AC line


Driving Cycle Simulation (Power/ Current Waveform mode)

Simulate real automotive working conditions by defining quick and irregular charging and discharging conditions.

- Import dynamic charge/discharge waveforms to simulate the DRIVE CYCLE or other actual applications via .xls file formats
- Supports 720,000 points within driving profile memory for saving profiles of each channel
- Minimum transition time (Δt) = 10ms



DST Power Profile




Support FUDS test


Customized rated power

17030 design allows for customized power levels.

- Channels are easily paralleled with same model to support higher current requirements. This feature provides ultimate flexibility between high channel count and high current testing. (Supports a maximum of 2 units)
- Dual output in one system, independent control



Loading DST waveform current




Loading FUDS waveform current


High accuracy capacity calculation

Voltage/current sampling rate of 50kHz used for calculations of capacity ratings in current waveform mode.

- V/I sampling rate : 50KHz
- Minimum data acquisition: 10ms
- Integrate calculus : For I : Capacity, - For V x I : Energy

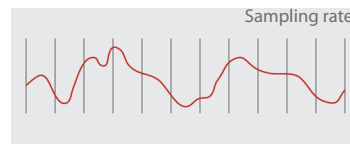

Other Cycler

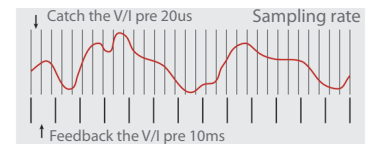

Double Integrating Method

System Function

Charge / discharge mode

- Constant Current/Constant current- limited Voltage/Constant Power
- Waveform current mode
- DCIR mode (IEC61960-2004)
- Rest mode

Cut-off condition

- Time/ Capacity/ Voltage/ Current/ Temperature
- Data Acquisition from data logger (option)
- Data Acquisition from BMS (option)

Protection


- OVP/UVP/OCP/OTP/OQP
- Data Acquisition from data logger (option)
- Data Acquisition from BMS (option)
- Turn the main loop off for safety issues of AC line
- ΔV protection / ΔI protection for internal short of battery pack
- ΔV period protection / ΔI period protection
- CC-CV transition time

Testing Data

- Generate the detailed report and step report
- Customized report format

Continuous transition

- Continuous charge and discharge transition: No time delay to transit from charge to discharge
- Continuous CC-CV transition: No overshoot current or voltage which may damage the battery when transitioning modes



Response time

- The trip time between maximum charge and maximum discharge current in static modes is 50ms. (10mS in waveform mode)
- Smooth current profiling without overshoot to avoid damage the battery

Data Recovery Function

- 60 min of temporary data storage when sampling time is 1 sec
- Automatic data recording in non-volatile memory allows for resumption of testing following power interruption

Temperature Measurement

- Temperature measured for each channel within the range of 0~90°C $\pm 2^\circ\text{C}$
- Maximum 4 thermal sensors can be connected in series for measuring 4 independent battery points
- Data Acquisition for temperature protection


SOFTWARE FUNCTION

The 17030 Test system is specifically designed to meet the various requirements for testing secondary battery packs with high safety and stability. Charge and discharge protection aborts tests when abnormal conditions are detected. Data loss, storage and recovery are protected against power failure.

- Real-time battery pack status browse
- Icon Manager: Test status of each channel is managed through different icons, easy to read and understand
- Authority management: Allows for multiple user authority
- Fault record tracking: Records abnormal states of each channel independently




Battery Pro Main Page
(English)



UUT Specifications




Status browser (1)

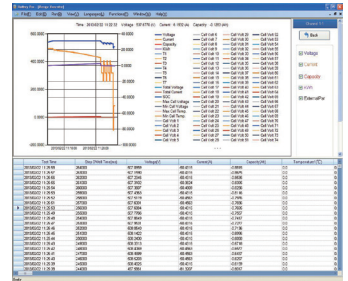


Status browser (2)

Recipe editor


- 255 charge/discharge conditions
- Sets dual layer loops (cycle & loop) with 9999 loops per layer
- Ability to edit dynamic charge/discharge waveform
- 10ms current switching speed in waveform current mode
- Testing modes: CV / CC / CP / CC-CV / Waveform current / DCIR
- Cut-off conditions (time, current, capacity, cut-off voltage, cut-off current, etc.)

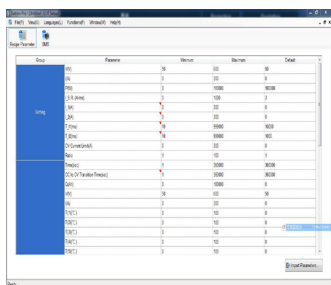


Status browse in DST test

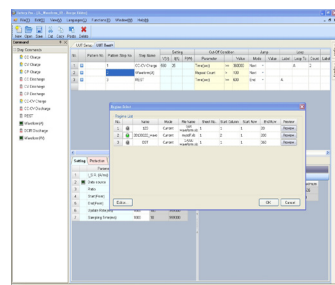

Loading DST waveform

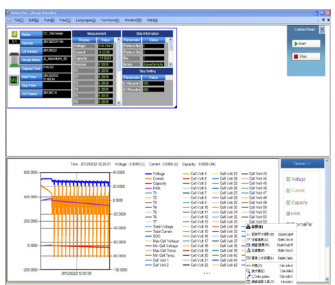


Status browse in DST test

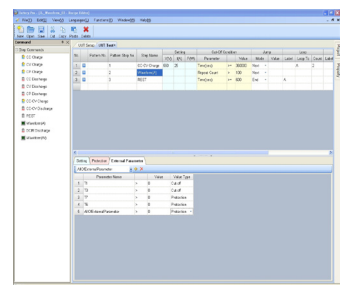


Loading multi-Waveform

Testing Data


- Generate the detailed report and step report
- Customized report format
- Exports test reports in PDF, CSV and XLS
- Graphical report function
- Report analysis Function: Users can create customized reports such as life-cycle report, Q (AH)-V(V) report, V(V)/I(A)/T(°C)-time report...etc through the user-defined X and Y axis parameters
- Real-time browsing test reports of each channel
- Diversified reports & charts: Real-time report, Cut-off report, X-Y scatter chart report

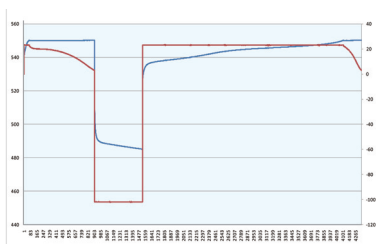


Learning Test

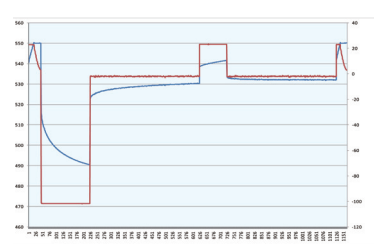

DCIR Test

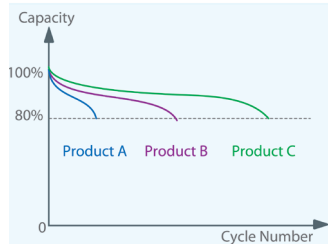


Cycle Life Test

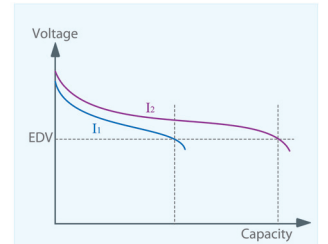

Capacity Measurement


SOFTWARE INTEGRATION (OPTION)

- Battery Pro can communicate to most thermal chambers for life and temperature testing .
- Many third party devices can be integrated into the 17030 via standard interface protocols (discrete I/O interface, GPIB, etc).

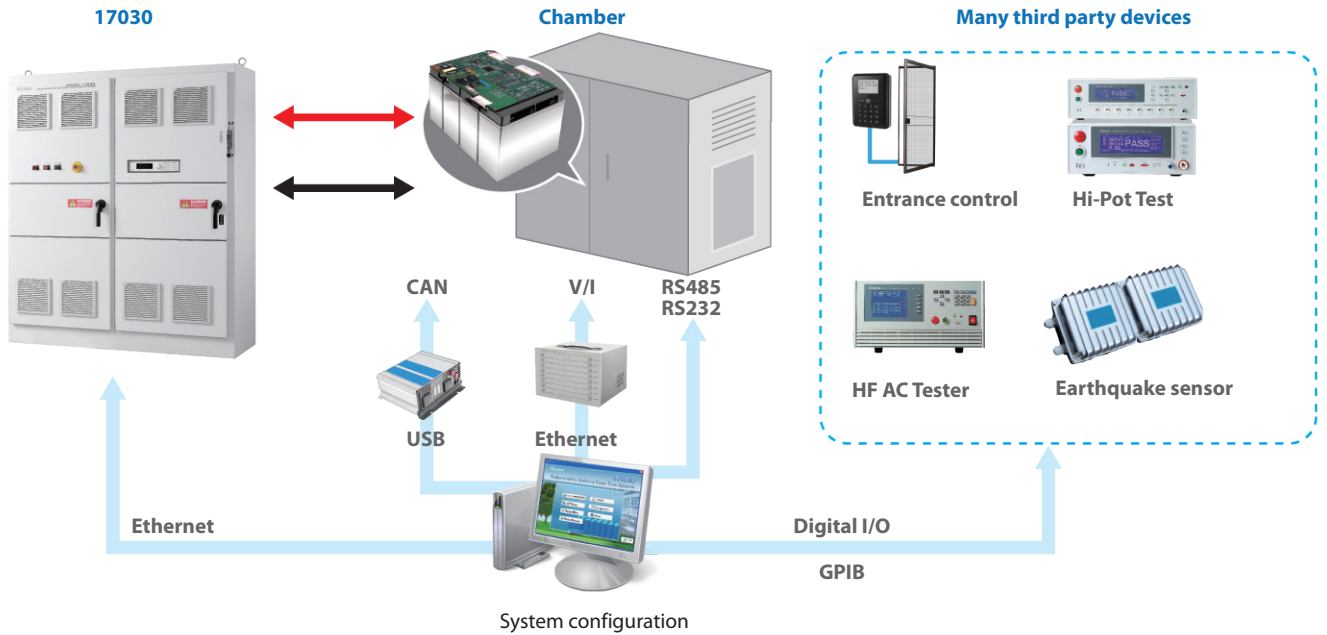


■ BMS communication interface: Collect Battery Management System data automatically during testing.

- User types in the CAN message
- Convert DBC to Battery Cycler by Software Tools

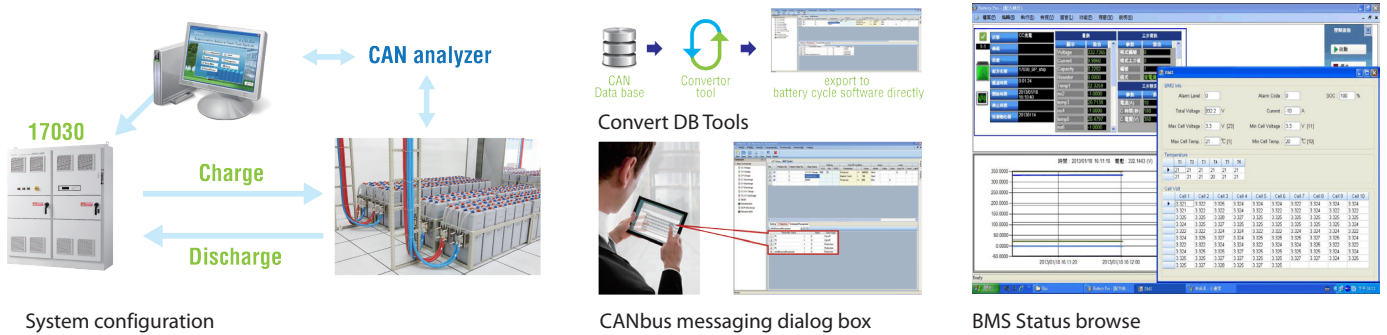

■ Data logger: Data logger integration allows for detailed collection of voltage, current and temperature data during charge/ discharge profiling.

- Support B, E, J, K, N, R, S, and T type thermal couples with ITS-90 defined temperature range
- Individual channel cold junction compensation with $\pm 0.3^{\circ}\text{C}$ accuracy
- Temperature resolution up to 0.01°C , error down to $(0.01\% \text{ of reading} + 0.3^{\circ}\text{C})$
- Voltage full range $\pm 10\text{VDC}$; resolution $10\mu\text{V}$; error down to $0.015\% \text{ of reading} + 100\mu\text{V}$
- No matter how many channels are active, the data rate can be as fast as 5 samples per second per channel.

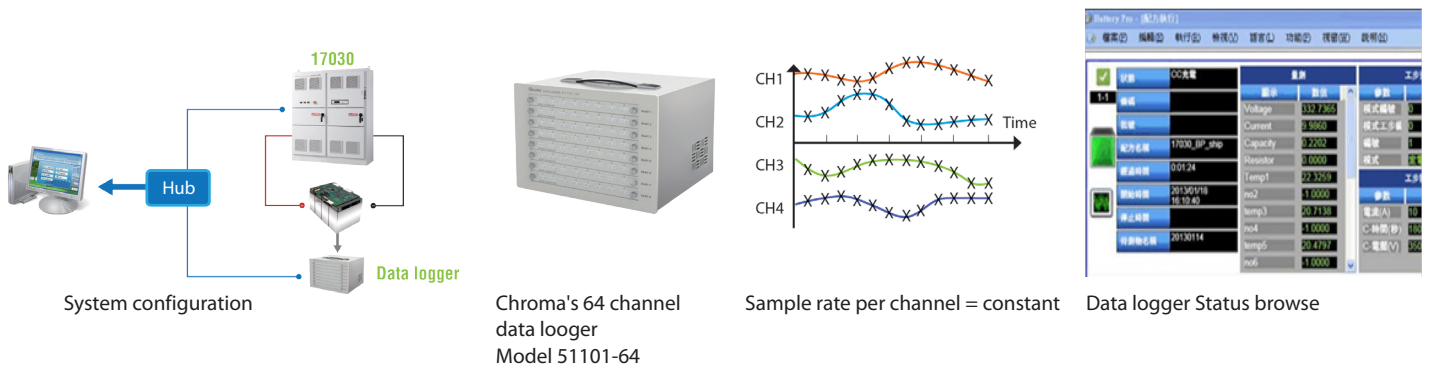

PROTECTION FUNCTION AND DATA RECOVERY

Safety Protection

- Channel monitoring icon: empty, contact checking, contact check failed, reverse polarity, standby, running, pause, finish, communication error, etc
- Save testing data when PC is down or disconnected
- Save the test settings to resume after the power failure is recovered

SPECIFICATIONS

Model	17030 *					
	1	2	1	1	1	
Channel	1	2	1	1	1	
Max Power *1	90kW	180kW	180kW	210kW	210kW	
Max Power /Per channel	90kW	90kW	180kW	210kW	210kW	
Max Voltage	450V	450V	600V	700V	900V	
Max Current / Per channel	200A	200A	300A	300A	500A	
Constant Voltage Mode						
Voltage Range *2	13-450Vdc	15-450Vdc	16-600Vdc	15-700Vdc	19-900 Vdc	
Voltage accuracy	0.1%F.S.	0.1%F.S.	0.1%F.S.	0.1%F.S.	0.1%F.S.	
Voltage resolution	10mV	10mV	15mV	15mV	20mV	
Constant Current Mode						
Maximum Current	200A	200A	300A	300A	500A	
Current accuracy	0.2%F.S.	0.2%F.S.	0.2%F.S.	0.2%F.S.	0.2%F.S.	
Current resolution	10mA	10mA	15mA	15mA	20mA	
Constant Power Mode						
Max Power / Per channel	90kW	90kW	180kW	210kW	210kW	
Power accuracy	0.3%F.S.	0.3%F.S.	0.3%F.S.	0.3%F.S.	0.3%F.S.	
Power resolution	5W	5W	10W	15W	20W	
Current Rising Time (10% to 90% Load)	10ms with 0.2Ω Resistive load	10ms with 0.2Ω Resistive load	10ms with 0.2Ω Resistive load	10ms with 0.2Ω Resistive load	10ms with 0.2Ω Resistive load	
Ripple Noise (DC Current)	<1%F.S.	<1%F.S.	<1%F.S.	<1%F.S.	<1%F.S.	
Overshoot	<1%F.S.	<1%F.S.	<1%F.S.	<1%F.S.	<1%F.S.	
Measurement *3						
Voltage Read Back						
range	0~450V	0~450V	0~600V	0~700V	0~900V	
accuracy	0.05% rdg.+0.05% F.S.	0.05% rdg.+0.05% F.S.	0.05% rdg.+0.05% F.S.	0.05% rdg.+0.05% F.S.	0.05% rdg.+0.05% F.S.	
resolution	10mV	10mV	15mV	15mV	20mV	
Current Read Back						
High range	0~200A	0~200A	0~300A	0~300A	0~500A	
accuracy	±0.1%F.S.	±0.1%F.S.	±0.1%F.S.	±0.1%F.S.	±0.1%F.S.	
Low range	0~50A	0~50A	0~75A	0~75A	0~125A	
accuracy	±0.2%F.S.	±0.2%F.S.	±0.2%F.S.	±0.2%F.S.	±0.2%F.S.	
resolution	10mA	10mA	15mA	15mA	20mA	
Power Read Back						
Power range	90kW	90kW	180kW	180kW	210kW	
Power accuracy	±0.2% F.S.	±0.2% F.S.	±0.2% F.S.	±0.2% F.S.	±0.2% F.S.	
Power resolution	5W	5W	10W	15W	20W	
Thermal Sensor						
range	0°C ~90°C	0°C ~90°C	0°C ~90°C	0°C ~90°C	0°C ~90°C	
accuracy	±0.2°C	±0.2°C	±0.2°C	±0.2°C	±0.2°C	
resolution	0.1°C	0.1°C	0.1°C	0.1°C	0.1°C	
AC Input						
Line voltage / Frequency *4	3Ø 200V/220V/380V/440V/480V ±5%, 47~63Hz					
Others						
Audible noise level (in 1m distance)	Under 70dB					
Efficiency (Typical)	85%					
Interface *5	Ethernet					
Operation Temperature	0°C ~ 40°C					
Dimension (H x W x D) *6	Transformer	1111 x 813 x 686mm / 43.75 x 32 x 27 inch	1257 x 1041 x 813mm / 49.5 x 41 x 32 inch	1257 x 1041 x 813mm / 49.5 x 41 x 32 inch	1257 x 1041 x 813mm / 49.5 x 41 x 32 inch	1257 x 1041 x 813mm / 49.5 x 41 x 32 inch
	Power Enclosure	2286 x 2007 x 609mm / 90 x 79 x 24 inch	2286 x 2007 x 609mm / 72 x 119 x 24 inch	2286 x 2007 x 609mm / 90 x 79 x 24 inch	2286 x 2007 x 609mm / 90 x 79 x 24 inch	2286 x 2007 x 609mm / 90 x 79 x 24 inch
Weight *7	Transformer	approx. 465 kg / approx. 1025 lbs	approx. 710 kg / approx. 1560 lbs	approx. 640 kg / approx. 1400 lbs	approx. 710 kg / approx. 1560 lbs	approx. 710 kg / approx. 1560 lbs
	Power Enclosure	approx. 1140 kg / approx. 2500 lbs	approx. 1600 kg / approx. 3500 lbs	approx. 1140 kg / approx. 2500 lbs	approx. 1140 kg / approx. 2500 lbs	approx. 1270 kg / approx. 2800 lbs

* All specifications are subject to change without notice. Please visit our website for the most up to date specifications.

SPECIFICATIONS

Model	17030 *				
Channel	1	1	1	1	
Max Power *1	240kW	250kW	250kW	250kW	
Max Power / Per channel	240kW	250kW	250kW	250kW	
Max Voltage	900V	700V	700V	900V	
Max Current / Per channel	400A	500A	600A	500A	
Constant Voltage Mode					
Voltage Range *2	40-900 Vdc	15-700Vdc	10-700Vdc	10-900Vdc	
Voltage accuracy	0.1%F.S.	0.1%F.S.	0.1%F.S.	0.1%F.S.	
Voltage resolution	20mV	15mV	15mV	20mV	
Constant Current Mode					
Maximum Current	400A	500A	600A	500A	
Current accuracy	0.2%F.S.	0.2%F.S.	0.2%F.S.	0.2%F.S.	
Current resolution	20mA	20mA	30mA	20mA	
Constant Power Mode					
Max Power / Per channel	240kW	250kW	250kW	250kW	
Power accuracy	0.3%F.S.	0.3%F.S.	0.3%F.S.	0.3%F.S.	
Power resolution	20W	15W	20W	20W	
Current Rising Time (10% to 90% Load)	10ms with 0.2Ω Resistive load	10ms with 0.2Ω Resistive load	10ms with 0.2Ω Resistive load	10ms with 0.2Ω Resistive load	
Ripple Noise (DC Current)	<1%F.S.	<1%F.S.	<1%F.S.	<1%F.S.	
Overshoot	<1%F.S.	<1%F.S.	<1%F.S.	<1%F.S.	
Measurement *3					
Voltage Read Back					
Range	0~900V	0~700V	0~700V	0~900V	
Accuracy	0.05% rdg.+0.05% F.S.	0.05% rdg.+0.05% F.S.	0.05% rdg.+0.05% F.S.	0.05% rdg.+0.05% F.S.	
Resolution	20mV	15mV	15mV	20mV	
Current Read Back					
High range	0~400A	0~500A	0~600A	0~500A	
Accuracy	±0.1% F.S.	±0.1%F.S.	±0.1%F.S.	±0.1%F.S.	
Low range	0~100A	0~125A	0~150A	0~125A	
Accuracy	±0.2% F.S.	±0.2%F.S.	±0.2%F.S.	±0.2%F.S.	
Resolution	20mA	20mA	30mA	20mA	
Power Read Back					
Power range	240kW	250kW	250kW	250kW	
Power accuracy	±0.2% F.S.	±0.2% F.S.	±0.2% F.S.	±0.2% F.S.	
Power resolution	20W	15W	20W	20W	
Thermal Sensor					
Range	0°C ~90°C	0°C ~0°C ~90°C	0°C ~90°C	0°C ~90°C	
Accuracy	±0.2°C	±0.2°C	±0.2°C	±0.2°C	
Resolution	0.1°C	0.1°C	0.1°C	0.1°C	
AC Input					
Line voltage / Frequency *4	3Ø 200V/220V/380V/440V/480V ±5%, 47~63Hz				
Others					
Audible noise level (in distance)	Under 70dB				
Efficiency (Typical)	85%				
Interface *5	Ethernet				
Operation Temperature	0 °C~ 40 °C				
Dimension (H x W x D) *6	Transformer	1257 x 1041 x 609mm / 49.5 x 41 x 32 inch	1257 x 1041 x 813mm / 49.5 x 41 x 32 inch	1257 x 1041 x 813mm / 49.5 x 41 x 32 inch	1257 x 1041 x 813mm / 49.5 x 41 x 32 inch
	Power Enclosure	2286 x 2007 x 609mm / 90 x 79 x 24 inch	2286 x 2007 x 609mm / 90 x 79 x 24 inch	2286 x 3023 x 609mm / 90 x 119 x 24 inch	2286 x 3023 x 609mm / 90 x 119 x 24 inch
Weight *7	Transformer	approx. 870 kg / approx. 1900 lbs	approx. 705 kg / approx. 1550 lbs	approx. 705 kg / approx. 1550 lbs	approx. 705 kg / approx. 1550 lbs
	Power Enclosure	approx. 1250 kg / approx. 2700 lbs	approx. 1250 kg / approx. 2700 lbs	approx. 1250 kg / approx. 2700 lbs	approx. 1250 kg / approx. 2700 lbs

*1 Customized rated power:

Voltage 10~1200V; max Current 1000A; Power 90~350kW

*2 The output range of voltage is referred by the cabling. The connection between the device and battery is 3 meters long as standard accessory.

*3 20us sampling rate for calculating battery capacity and energy

*4 The transformer is for isolation and to accommodate various facility voltages

*5 The interface from PC to 17030 is through Ethernet

*6 The dimension is for reference. The dimensions are subject to change base on real condition

*7 The weight is for reference. The weight are subject to change base on real condition

ORDERING INFORMATION

17030 : Regenerative Battery Pack Test System 90kW / 450V / 200A / 1CH

17030 : Regenerative Battery Pack Test System 180kW / 450V / 200A / 2CH

17030 : Regenerative Battery Pack Test System 180kW / 600V / 300A / 1CH

17030 : Regenerative Battery Pack Test System 210kW / 700V / 300A / 1CH

17030 : Regenerative Battery Pack Test System 210kW / 900V / 500A / 1CH

17030 : Regenerative Battery Pack Test System 240kW / 900V / 400A / 1CH

17030 : Regenerative Battery Pack Test System 250kW / 700V / 500A / 1CH

17030 : Regenerative Battery Pack Test System 250kW / 700V / 600A / 1CH

17030 : Regenerative Battery Pack Test System 250kW / 900V / 500A / 1CH

A170201: IPC for battery test system

A692003: Thermal sensor(0~90°C) , sensor cable (30cm)

51101-64: Data logger - 64 channel (option)

Developed and Manufactured by:

CHROMA ATE INC.
致茂電子股份有限公司

HEADQUARTERS

66 Hwaya 1st Rd., Kueishan
Hwaya Technology Park,
Taoyuan County 33383,
Taiwan
Tel: +886-3-327-9999
Fax: +886-3-327-8898
http://www.chromaate.com
E-mail:info@chromaate.com

CHINA
CHROMA ELECTRONICS
(SHENZHEN) CO., LTD.
8F, No.4, Nanyou Tian An
Industrial Estate, Shenzhen,
China PC: 518052
Tel: +86-755-2664-4598
Fax: +86-755-2641-9620

JAPAN
CHROMA JAPAN CORP.
472 Nippa-cho, Kouhoku-ku,
Yokohama-shi, Kanagawa,
223-0057 Japan
Tel: +81-045-542-1118
Fax: +81-045-542-1080
http://www.chroma.co.jp
E-mail:info@chromaate.com

U.S.A.
CHROMA ATE INC. (U.S.A.)
7 Chrysler Irvine, CA 92618
Tel: +1-949-421-0355
Fax: +1-949-421-0353
Toll Free: +1-800-478-2026
http://www.chroma.com
E-mail: info@chroma.com
E-mail: sales@chroma.com

CHROMA SYSTEMS
SOLUTIONS, INC.
19772 Pauling, Foothill Ranch,
CA 92610
Tel: +1-949-600-6400
Fax: +1-949-600-6401
http://www.chromausa.com
E-mail: sales@chromausa.com

EUROPE
CHROMA ATE EUROPE B.V.
Morsestraat 32, 6716 AH Ede,
The Netherlands
Tel: +31-318-648282
Fax: +31-318-648288
http://www.chroma.eu.com
E-mail: sales@chroma.eu.com

Distributed by: