



SX 70/15

SX Range: 0.8 GHz - 6 GHz / 70 W CW - 15 W CW



Prana SX 70/15

- Class A solid state
- Broadband (instantaneous dual band): 0.8 GHz – 6 GHz
- Typical output power :
 - 70 W CW (0.8 – 3.2 GHz) and
 - 15 W CW (3.2 – 6 GHz)
- Linear output power guaranteed with harmonics < -20 dBc
- Air cooling: self contained fans
- Can operate in full mismatch conditions without damage
- Upgradable to SX 70/30 possible
- Reliable, efficient and robust
- 19" Rack
- 3 years standard warranty

Maintenance

- Amplifier designed for minimal maintenance
 - Easy access to all parts
 - Modular design
 - Repairs with minimum adjustments
- Rapid diagnostic
- Minimal downtime
- Contract for preventive and corrective maintenance available

Applications

- EMC tests
- RF tests and instrumentation
- Radiocommunication
- Measurement and research laboratories

Versions

- SX 70/15 D amplifier with:
 - Display
 - Digital control
 - IEEE 488 GPIB Communication
- SX 70/15 DC : SX 70/15 D with :
 - Integrated bidirectional coupler
 - display of instantaneous power

SX Range

- SX 20/15 => 20 W CW - 15 W CW
- SX 40/15 => 40 W CW - 15 W CW
- SX 40/30 => 40 W CW - 30 W CW
- SX 70/15 => 70 W CW - 15 W CW
- SX 70/30 => 70 W CW - 30 W CW
- SX 70/55 => 70 W CW - 55 W CW
- SX 120/30 => 120 W CW - 30 W CW
- SX 120/55 => 120 W CW - 55 W CW
- SX 120/100 => 120 W CW - 100 W CW
- SX 220/55 => 220 W CW - 55 W CW
- SX 220/100 => 220 W CW - 100 W CW
- SX 220/150 => 220 W CW - 150 W CW

Extra

- External coupler
- Supply and integration inside a cabinet
- RF Power cable

North America Sales, Service & Support:



8526 Virginia Meadows Drive
Manassas, VA 20109

Ph: (703) 365-2330

www.hvtechnologies.com

emcsales@hvtechnologies.com

SX70/1515MAY2019 - Electrical and Mechanical Specifications subject to change without notice.

PRANA R&D - 52 Avenue de la Libération CS 10161 - 19361 MALEMORT Cedex - France
Tel : 33(0)5 55 86 49 40 - Fax : 33(0)5 55 86 49 45




www.prana-rd.com
Made in France

SX 70/15

SX Range: 0.8 GHz - 6 GHz / 70 W CW - 15 W CW

SX70/15 POWER AMPLIFIER 70W-15W / 800 MHz - 6000 MHz

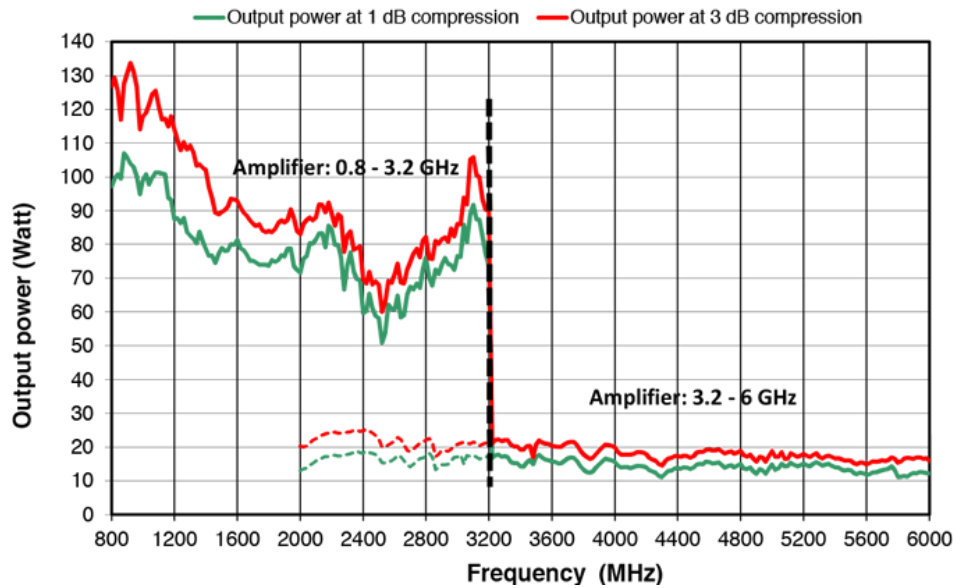

Specifications

Frequency bandwidth	0.8 GHz - 6 GHz
Typical output power	70 W / 15 W
Power at 3 dB compression	50 W min. up to 3.2 GHz / 14 W min. up to 6 GHz
Power at 1 dB compression	40 W min. up to 3.2 GHz / 10 W min. up to 6 GHz
Harmonics distortion	H2,H3 < -20 dBc for the output power at 1 dB compression
Class type	Class A
Gain	50 dB
Linear power gain flatness	± 5 dB max
Mismatch tolerance	infinite without damage
Input impedance	50 ohms / VSWR: 2:1 max
Output impedance	50 ohms / VSWR: 2:1 max
Input power	+10 dBm max.
RF input connector	Type N fem. (front or rear panel) – other connector type on request
RF output connector	Type N fem. (front or rear panel) – other connector type on request
Safety interlock	Connector type BNC
Digital control	Transistors, power supplies and internal temperature
Communication interface	IEEE 488
4 lines digital display	Status, faults, (direct and reverse instantaneous power for DC version)
Ambient operating temperature	0 °C / + 35 °C
Room temperature storage	-20 °C / +70 °C
Cooling	Forced air: 120 l/sec max. (self contained fans)
Power voltage	200-250 VAC, 47-63 Hz, single phase
Rated current	2.8 A at 230 VAC
Dimensions	640 x 450 x 312 mm (7U) / 25.2 x 17.7 x 12.3 in (7U)
Weight	37 kg / 81 lb

SX 70/15 DC version :

Integrated bidirectional power coupler	Coupling factor 49 dB typ.
Power coupling connector	Type N fem. (rear panel)
Estimated output power losses due to the coupler	0.5 dB

North America Sales, Service & Support:



8526 Virginia Meadows Drive
Manassas, VA 20109
Ph: (703) 365-2330
www.hvtechnologies.com
emcsales@hvtechnologies.com

SX70/1515MAY2019 - Electrical and Mechanical Specifications subject to change without notice.