

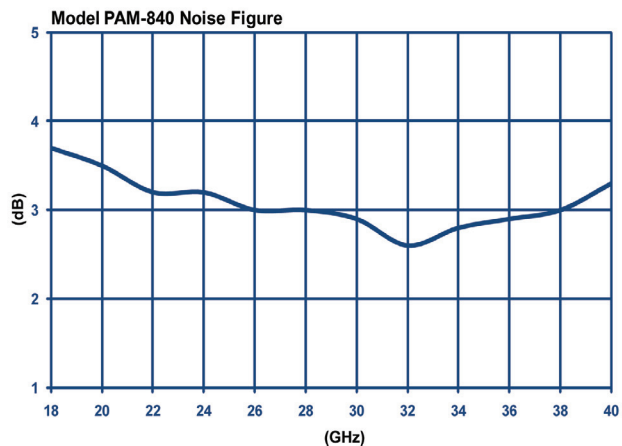


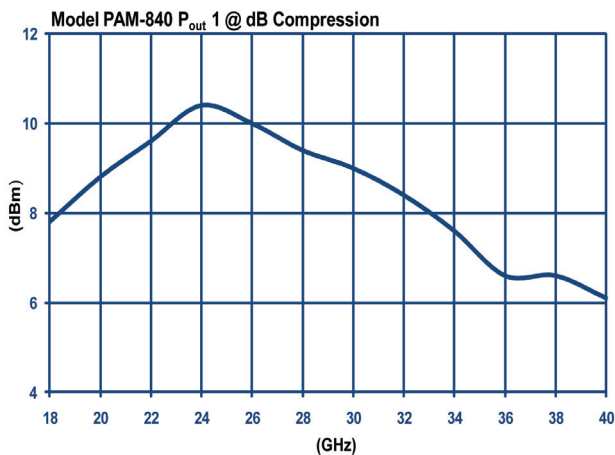

Specifications

Frequency:	18 GHz - 40 GHz
Typical Gain:	25 dB
Flatness:	± 2.5 dB
Noise Figure:	< 4 dB
VSWR (Input / Output):	2.5: 1 / 2.5: 1
P_{out} @1dB Comp:	+6 dBm, min.
Input power handling:	+10 dBm, CW
Operating Power:	6 VDC, 500 mA
Impedance:	50 Ω
Connector type:	K type*
Size:	7.5" x 5" x 3" (9 x 13 x 7.6 cm)
Weight:	2.5 lbs. (1.1 kg)

* SMA, 2.9 mm, 3.5 mm & K connectors will mate mechanically & electrically to each other. The K connector is a ® trademark of the Anritsu Company.

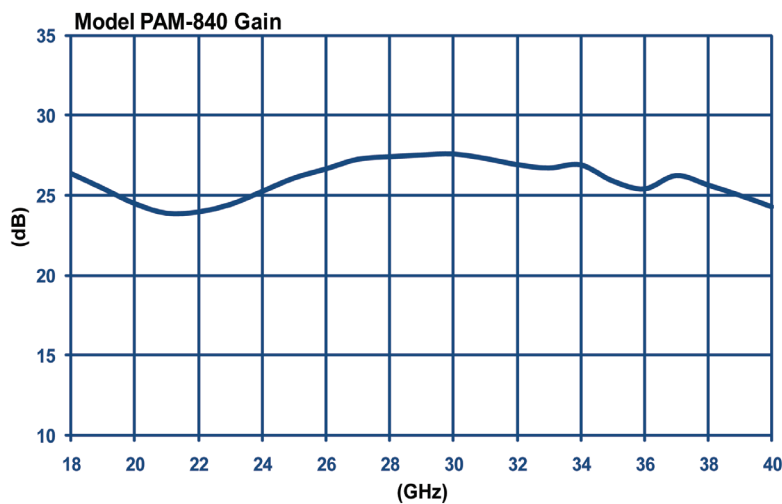

All specifications are subject to change without notice.
All values are typical, unless specified.