



Advanced Test Equipment Rentals  
www.atecorp.com 800-404-ATEC (2832)

**Fujikura 12S**



# Lightspeed mobility

—The FTTH splicer—



## Single Fiber Fusion Splicer **Fujikura 12S** *Fixed v-groove, Dual-axis observation system*



- Excellent for FTTH.
- World's Smallest & Lightest.
- Superior mobility for aerial / confined space.



Open & Splice!



Place & Splice!



Sling & Splice!



# Fujikura 12S

## SPECIFICATIONS

Applicable fibers	Single / SMF (G.652/657), MMF (G.651), DSF (G.653), NZDSF (G.655)
Cladding dia./ Sheathe dia.	125 μm / 160μm to 3mm by fiber holder system
Cleave length	5mm to 13mm
Splice mode / heating mode	Total 100 splice modes / 30 heating modes
Typical splice loss	0.05dB (SM), 0.02dB (MM), 0.08dB (DS) and 0.08dB (NZDS) Measured by cut-back method relevant to ITU-T and IEC standards.
Splice time / tube heating time	Typical 15sec with SM / Typical 30sec with FP-03(60mm) sleeve
Splice result storage	Last 2000 splices
Viewing methods / magnification	2 axis CMOS camera with 4.47" color LCD, 100X magnification.
Tension test	1.96 to 2.25N
Applicable protection sleeve	60mm, 40mm and Fujikura micro sleeves
No. of splice / heating per battery full charge*1	Typical 100 cycles with BTR-10
Electrode life	3000 splices
Size / weight	121W x 162D x 57H mm / 776g (including battery)
Operating condition	Altitude : 0 to 3,660m above sea level, Wind : 15m/sec Temperature : -10 to 50deg C, Humidity : 0 to 95%RH, non-dew
Other features	PC software upgrade / data management
Resistance tests*2	Shock : 76cm (30inch) bottom surface drop Dust : Exposure to dust (0.1 to 500μm dia. Alumina Silicate). Rain : H=10mm/hr for 10min

\*1: one(1) splicing and heating cycle per two(2) min. under room temperature condition.

\*2: Carried out in Fujikura labs in Japan. The shock resistance, dust resistance and rain resistance test do not guarantee that the product will not be damaged under these conditions.

## STANDARD PACKAGE

Description	Model No.	Q'ty
Fusion splicer	12S with BTR-10 and ELCT2-12	1pc
AC adapter	ADC-19	1pc
AC power cord	ACC-XX XX=08(JP),09(US), 10(UK), 11(EU),12(AU)	1pc
Carrying case	CC-29	1pc
Spare electrodes	ELCT2-12	1pair
Instruction manual CD	M-12	1pc
Quick reference guide	Q-12S-E	1pc
Alcohol pot	AP-01	1pc
Screw driver	SD-01	1pc

## OPTIONAL ITEMS

Description	Model No.
Fiber holders	FH-60-250 (coating dia. of 250μm)
	FH-60-900 (coating dia. of 900μm)
	FH-60-DC250 (coating dia. of 250μm in drop cable)
	FH-FC-20 (coating dia. of 900μm in 2.0mm Sheath code)
	FH-FC-30 (coating dia. of 900μm in 3.0mm Sheath code)
FH-60-LT900 (900μm dia. loose buffer fiber)	
Battery pack	BTR-10
Electrodes	ELCT2-12


## ACCESSORIES

Description	Model No.
High precision single fiber cleaver	CT-05 (for single fiber)
High precision fiber cleaver	CT-30 series (for single to 12 ribbon fibers)
Primary coat stripper	PS-02
Nylon jacket stripper	JS-01
Protection sleeves	FP-03 / 03 (L=40) and FPS01series

## STANDARD PACKAGE



## OPTIONAL ITEMS

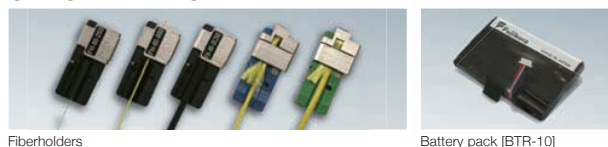

Specifications and descriptions are subject to change without prior notice.

## Fujikura Ltd.

1-5-1, Kiba, Koto-ku, Tokyo 135-8512, Japan  
Phone:+81-3-5606-1164 Fax:+81-3-5606-1534 <http://www.fujikura.co.jp>

## Fujikura Asia Ltd.

438A Alexandra Road, Block A Alexandra Technopark #08-03 Singapore 119967  
Phone:+65-6-278-8955 Fax:+65-6-278-0965 <http://www.fujikura.com.sg>

## Fujikura Europe Ltd.

C51 Barwell Business Park, Leatherhead Road, Chessington, Surrey KT9 2NY, UK  
Phone:+44-20-8240-2000 Fax:+44-20-8240-2010 <http://www.fujikura.co.uk>

## AFL Telecommunications

260, Parkway East, Duncan, SC29334, USA  
Phone:+1-800-235-3423 Fax:+1-800-926-0007 <http://www.aflglobal.com>

## Fujikura (China) Co., Ltd.

16th Floor, Shanghai Hang Seng Bank Tower, 1000 Lujiazui Ring Road, Pudong New Area, Shanghai, 200120 CHINA  
Phone:+86-21-6841-3636 FAX:+86-21-6841-2070 <http://www.fujikura.com.cn>