



## Amplifiers

### Model 10000A225B

#### Features:

- 10 kW CW, .01-225 MHz
- Class A design
- Built-in fault monitoring and protection
- Remote control: Ethernet, USB, GPIB, fiber-optic serial, RS-232
- Modular design for easy maintenance and service

#### Applications:

- EMC (military, aviation, automotive, commercial)
- Radiated and conducted EMC testing
- General purpose, antenna, and component testing

To view our full amplifier portfolio visit:

[www.arworld.us/amplifiers](http://www.arworld.us/amplifiers)

The Model 10000A225B is a solid-state, Class A design, self-contained, air-cooled, broadband power amplifier designed for applications where instantaneous bandwidth, high gain and linearity are required. It will provide a minimum of 10 kW of RF power. Protection from input overdrive beyond 0 dBm is provided as well as protection from various failure conditions including over-temperature and power supply faults.

A front panel display indicates the operational status and fault conditions. All amplifier control functions, and status indications are available remotely using GPIB/IEEE-488, RS-232, fiber-optic serial, USB, or Ethernet. Interface connectors are located on the back panel. Local and remote operation is managed by a switch on the front panel.

Standard RF sample ports allow for forward and reverse power monitoring.

This is a high-power Class A amplifier. The low level of spurious signals and linearity make it ideal for EMC test applications where continued operation into high VSWR loads including open and short circuits is required.

The export classification for this equipment is EAR99. These commodities, technology or software are controlled for export in accordance with the U.S. Export Administration Regulations. Diversion contrary to U.S. law is prohibited.

AR RF/Microwave Instrumentation

160 Schoolhouse Rd

Souderton, PA 18964

215.723.8181

info@arworld.us

www.arworld.us

ISO 9001:2015 Certified

ISO 17025 :2017 Accredited



Model 10000A225B

- 10 kW
- .01-225 MHz

Electrical Specifications					
Parameter	Symbol	Minimum	Typical	Maximum	Unit
Rated Power Output (0.01 - 100 MHz)	PSAT	10000	12500	>13000	W
Rated Power Output (100 - 225 MHz)	PSAT	7000	9500	>10000	W
Input for Rated Output	Pin			1	mW
				0	dBm
Power Output @ 3dB Compression (0.01 - 50 MHz)	P3dB	10000	12000	>13000	W
Power Output @ 3dB Compression (50 - 100 MHz)	P3dB	9500	12000	>13000	W
Power Output @ 3dB Compression (100 - 150 MHz)	P3dB	7500	9500	>10000	W
Power Output @ 3dB Compression (150 - 225 MHz)	P3dB	6500	8000	>9000	W
Power Output @ 1dB Compression (0.01 - 50 MHz)	P1dB	10000	11000	>11000	W
Power Output @ 1dB Compression (50 - 100 MHz)	P1dB	8000	9000	>10000	W
Power Output @ 1dB Compression (100 - 150 MHz)	P1dB	5500	8000	>9000	W
Power Output @ 1dB Compression (150 - 225 MHz)	P1dB	5000	5500	>7000	W
Operating Frequency	BW	0.01		225	MHz
Gain (Small Signal)		70	75		dB
Gain Reduction Adjustment (when below gain compression)		0		20	dB
Flatness @ small signal (-20 dBm input, -15 @ 225 MHz)	$\Delta G$		$\pm 1.5$	$\pm 2.5$	dB
Input Impedance	Z in		50		Ohm
			1.5:1	2.0:1	VSWR
Output Impedance	Z out		50		Ohm
3 <sup>rd</sup> Order Intercept	IP3		+77		dBm
Noise Figure	NF		15		dB
Harmonic Distortion @ 7500 W	H2, H3		-30	-20	dBc
Harmonic Distortion @ Rated Power (Minimum)	H2, H3		-25	-15	dBc
Spurious			-73		dBc
Power Consumption	PD			35	kW



Model 10000A225B

- 10 kW
- .01-225 MHz

<b>Absolute Maximum Rating</b>				
Exceeding any of the limits listed here may result in permanent damage to the device.				
Parameter	Minimum	Typical	Maximum	Unit
RF Drive (.01 - .02 MHz)		0	0	dBm
RF Drive (.02 - 225 MHz)		0	+13	dBm
RF Load		1:1	∞	VSWR
RF Load Reflected Will operate without damage or oscillation when connected to any load impedance without the aid of foldback circuitry. Load mismatch above 6:1 may limit output reflected power to 50% of minimum rated power.			50	%
AC Power (3-phase) Low voltage option	200		240	VAC
AC Power (3-phase) High voltage option	380		415	VAC
AC Power	47		63	Hz
Ambient Temperature	+5	+25	+35	°C
Storage Temperature	-20		+50	°C
Altitude			2000	m
Shock/Vibration	Normal Truck Transport			

<b>Mechanical Specifications</b>		
Parameters		Unit
Dimensions (W x H x D) (2 x 35U Rack)	112.2 x 181.6 x 97.8	cm
	44.2 x 71.5 x 38.5	in
Weight	590	kg
	1300	lb
Cooling	Forced air (self-contained fans) Side inlets / rear outlet Δt = +10°C (typical)	
Acoustical Noise (Measured @ 1 meter from the front)	83 (typical)	dBa

<b>Regulatory Compliance</b>	
Type	Standard
EMC	EN 61326-1
Safety	UL 61010-1
	CAN/CSA C22.2 #61010-1
	CENELEC EN 61010-1
RoHS	Directive 2011/65/EU
Export	EAR99



Model 10000A225B

- 10 kW
- .01-225 MHz

Connector interfaces	
Function	Type
RF input	N - female (50 $\Omega$ )
RF output	1-5/8 EIA - male (50 $\Omega$ )
RF sample	N female (50 $\Omega$ ), (80 dB typical)
IEEE-488	24-pin female
RS-232	9-pin subminiature D female
RS-232 (fiber optic)	ST
USB 2.0	Type B
Ethernet	RJ-45
Interlock	15-pin subminiature D female
AC Input	5-meter harmonized power cords supplied with amplifier. The power cords are left open ended to allow for facility power connection of user's choice.


## Ordering Options

<u>10000A225B</u>	-	<u>N</u>	-	<u>R</u>	-	<u>158</u>	-	<u>          </u>																		
Model		RF IN Conn Location, Type		RF OUT Conn Location, Type		RF Sample Ports		Primary Power																		
		<table border="1"> <thead> <tr> <th colspan="2">CONNECTOR LOCATION</th> </tr> </thead> <tbody> <tr> <td>Front</td> <td>F</td> </tr> <tr> <td>Rear</td> <td>R</td> </tr> </tbody> </table>	CONNECTOR LOCATION		Front	F	Rear	R		<table border="1"> <thead> <tr> <th colspan="2">RF SAMPLE PORTS</th> </tr> </thead> <tbody> <tr> <td>Front</td> <td>SPF</td> </tr> <tr> <td>Rear</td> <td>SPR</td> </tr> </tbody> </table>	RF SAMPLE PORTS		Front	SPF	Rear	SPR		<table border="1"> <thead> <tr> <th colspan="2">PRIMARY POWER</th> </tr> </thead> <tbody> <tr> <td>200-240 VAC</td> <td>LV</td> </tr> <tr> <td>380-415 VAC</td> <td>HV</td> </tr> </tbody> </table>	PRIMARY POWER		200-240 VAC	LV	380-415 VAC	HV		
CONNECTOR LOCATION																										
Front	F																									
Rear	R																									
RF SAMPLE PORTS																										
Front	SPF																									
Rear	SPR																									
PRIMARY POWER																										
200-240 VAC	LV																									
380-415 VAC	HV																									




- 10 kW
- .01-225 MHz

TYPICAL OUTPUT POWER (LINEAR FORMAT)

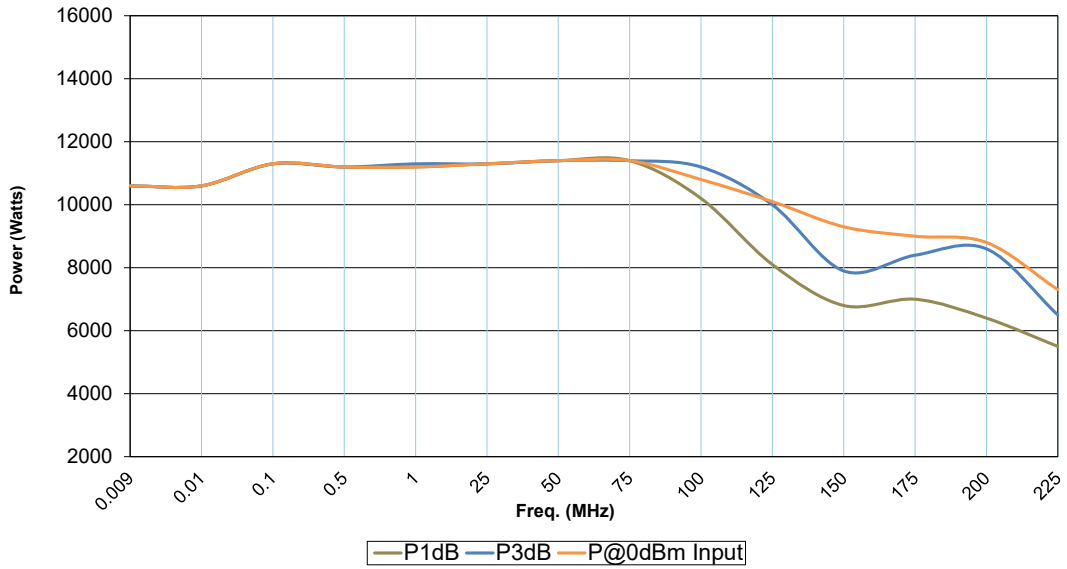


TYPICAL OUTPUT POWER (LOG FORMAT)

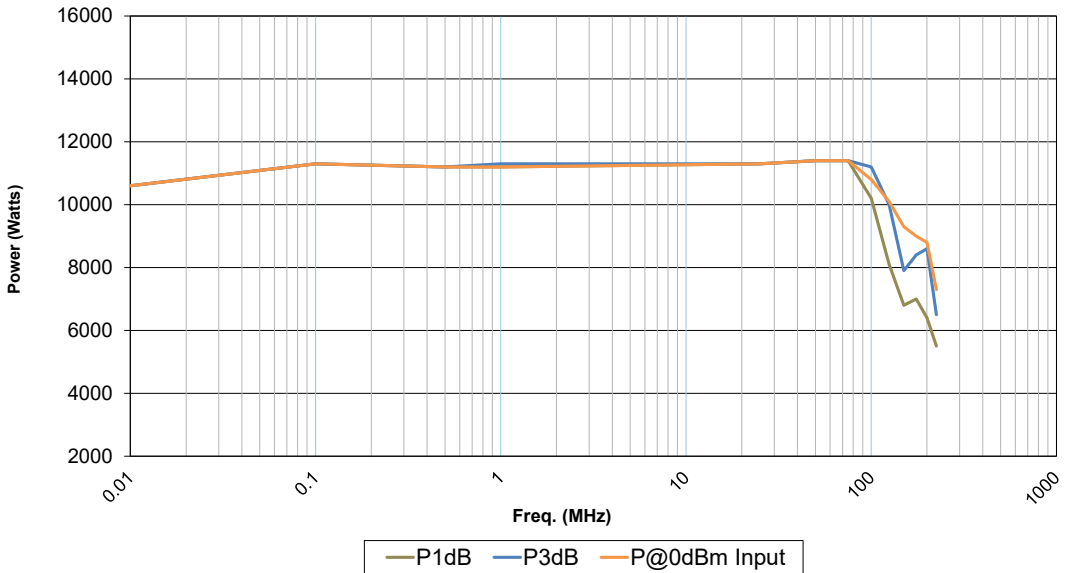


- 10 kW
- .01-225 MHz

TYPICAL SMALL SIGNAL GAIN @ -20dBm INPUT

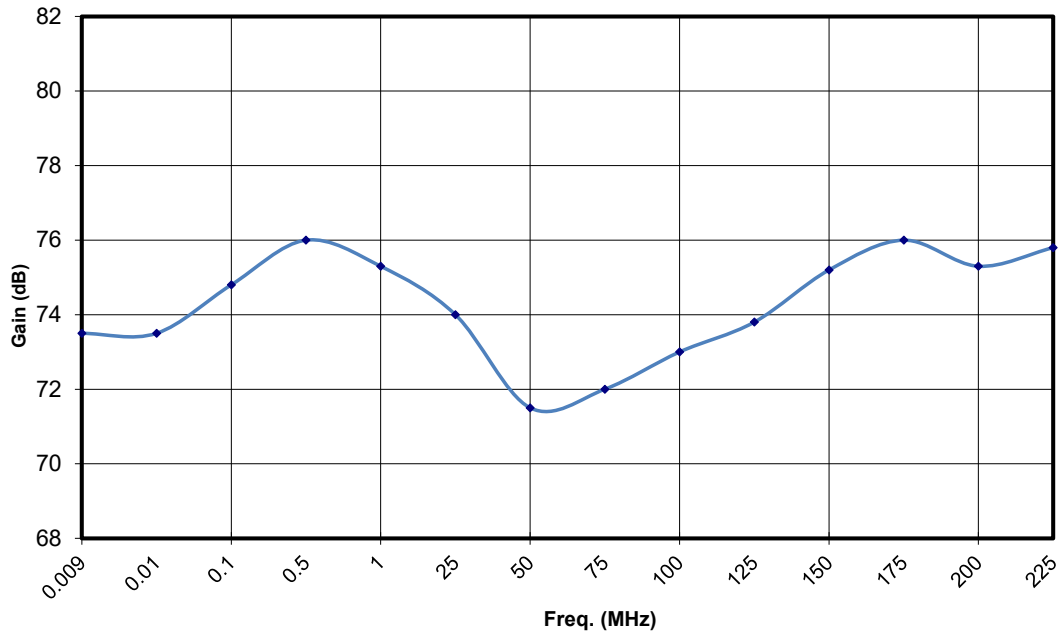


TYPICAL HARMONICS @ 7500 WATTS

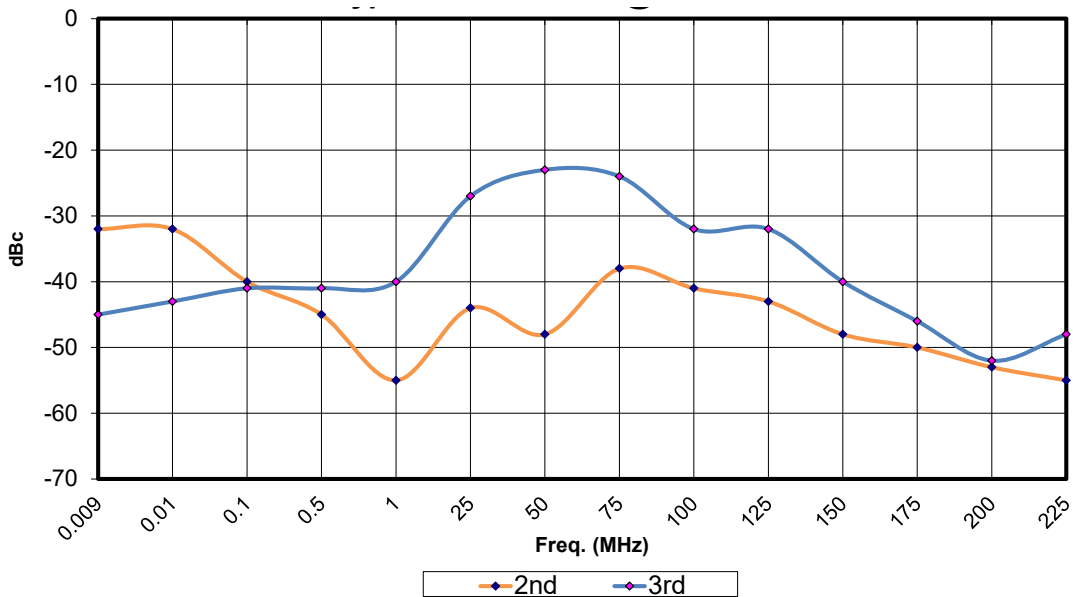


- 10 kW
- .01-225 MHz

TYPICAL INPUT VSWR

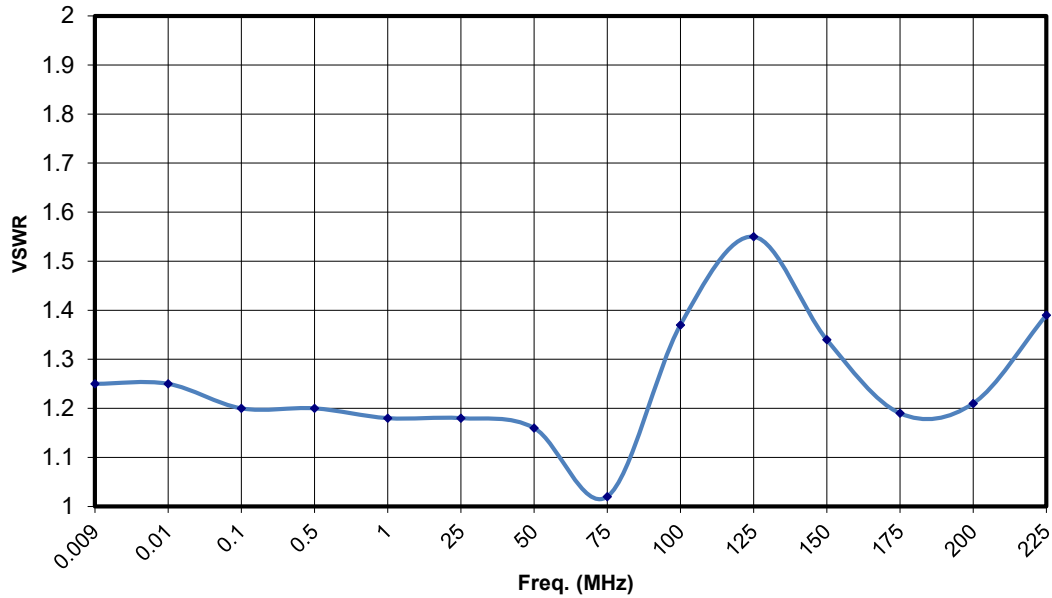

TYPICAL NOISE FIGURE

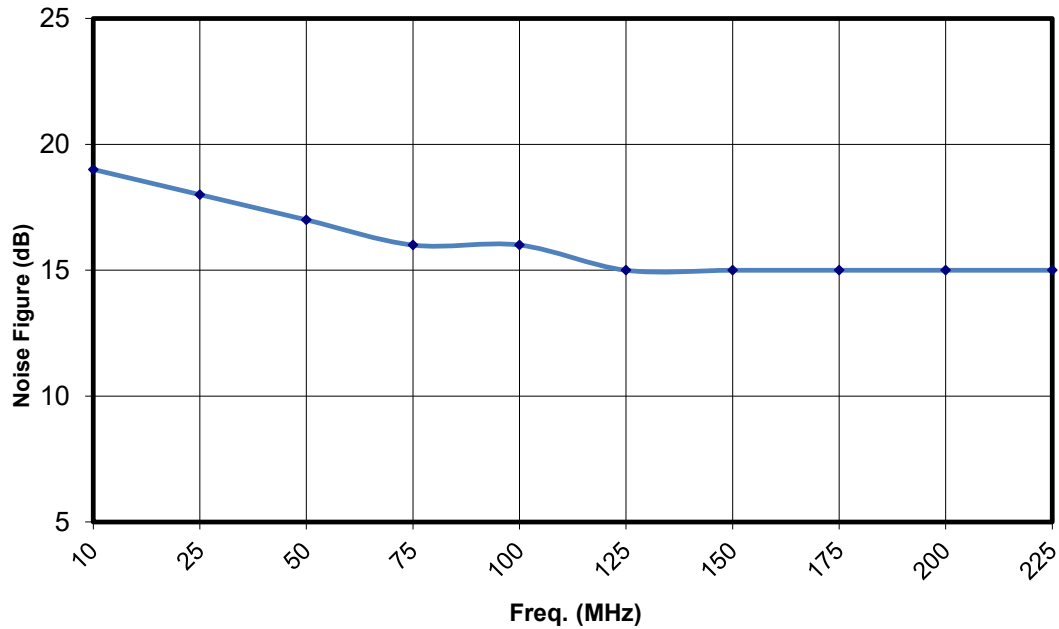

AR RF/Microwave Instrumentation • 160 Schoolhouse Rd, Souderton, PA 18964  
To order AR Products, call: 215.723.8181. For an applications engineer, call: 800.933.8181. Direct to Service call: 215.723.0275 or email: [service@arworld.us](mailto:service@arworld.us)  
For Faxing Orders: 866.859.0582 (Orders Only Please) [info@arworld.us](mailto:info@arworld.us)  
Approved for public release by AR RF/Microwave Instrumentation ISO 9001:2015 Certified • ISO 17025:2017 accredited

Revision 082222

