


50 Ω Divider (Zo) Low Capacitance

P6150 Data Sheet

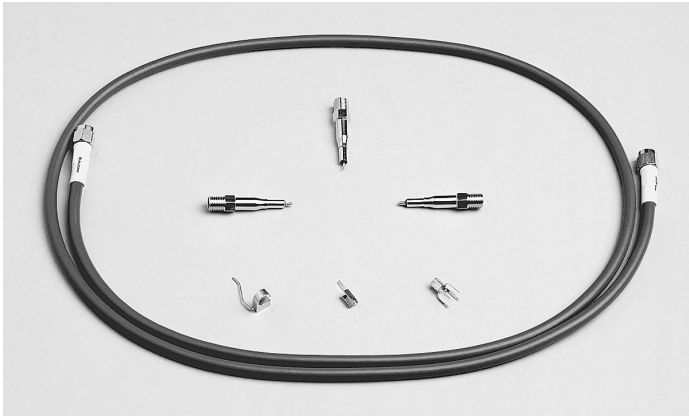

P6150

Features & Benefits

Low Impedance Zo TDR Passive Probes

- Low Capacitive Loading to Extremely High Frequencies
- Interchangeable Attenuator Tip Assemblies: 1X, 10X (P6150)

Applications

- High-speed Device Characterization in Microwave Communication, Signal Processing and Logic Applications
- Propagation Delays for ECL, GaAs and Other Logic Circuitry and Devices
- Circuit Board Impedance Testing (TDR)
- High-speed Sampling Systems

P6150 DC to 9 GHz

The P6150 is a 9 GHz bandwidth, 10X attenuation, low impedance probe designed for use with the SD2X family of Sampling/TDR plug-ins. The probe consists of interchangeable, screw-in attenuator tip assemblies (1X and 10X) and an SMA-to-SMA probe cable. An assortment of circuit and grounding attachments is included to optimize attachment to the device under test while maintaining high signal integrity.

Characteristics

- Nominal Length – 1 m.
- Attenuation – 10X: ±2%, 1X: ±2%.
- Bandwidth – 9 GHz, ≥3 GHz
- Rise Time – <38.8 ps, ≤170 ps.
- Loading Input R/C – 500 Ω/<0.15 pF, 50 Ω/N/A.
- Max V_{in} – 12.5 V_{RMS} *1.
- Propagation Delay – 4.40 ns ±0.1 ns, 4.40 ns ±0.1 ns.

*1 Limited by scope input or 30 V_{RMS} , whichever is less.

Recommended Instruments

TDS8000, CSA8000, TDS820, 11801C, CSA803C, TDS7404, CSA7404, TDS6404, and TDS6604 with TCA-SMA adapter.

Ordering Information

P6150

10X, 9 GHz, 1.0 m, Low Impedance Probe.

Includes: One 1X Attenuator Head (206-0398-00); Two 10X Attenuator Heads (206-0399-03); 1.0 m Cable Assembly (174-1341-00); Instruction Sheet (070-7173-01); and 1 Accessory Kit consisting of: 20 each Ground Clip, 3 each Adjustable Ground Lead, 10 each Electrical Contact and 2 each Probe to Circuit Board Ground Connectors (020-1708-00).

Additional Accessories

	Order
Electrical Contact	
GND, CLIP, PH, BRZ	131-4474-00
GND, LEAD, 0.025 WIRE NICKEL	131-4473-00
0.025 NICKEL ALLOY 52 WIRE	131-4468-00
SMA Male to BNC Female	015-0554-00
SMA Female to BNC Male	015-0572-00



Tektronix is registered to ISO 9001 and ISO 14001 by SRI Quality System Registrar.



Product(s) complies with IEEE Standard 488.1-1987, RS-232-C, and with Tektronix Standard Codes and Formats.

Contact Tektronix:

ASEAN / Australasia (65) 6356 3900
Austria 00800 2255 4835*
Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777
Belgium 00800 2255 4835*
Brazil +55 (11) 3759 7627
Canada 1 800 833 9200
Central East Europe and the Baltics +41 52 675 3777
Central Europe & Greece +41 52 675 3777
Denmark +45 80 88 1401
Finland +41 52 675 3777
France 00800 2255 4835*
Germany 00800 2255 4835*
Hong Kong 400 820 5835
India 000 800 650 1835
Italy 00800 2255 4835*
Japan 81 (3) 6714 3010
Luxembourg +41 52 675 3777
Mexico, Central/South America & Caribbean 52 (55) 56 04 50 90
Middle East, Asia, and North Africa +41 52 675 3777
The Netherlands 00800 2255 4835*
Norway 800 16098
People's Republic of China 400 820 5835
Poland +41 52 675 3777
Portugal 80 08 12370
Republic of Korea 001 800 8255 2835
Russia & CIS +7 (495) 7484900
South Africa +41 52 675 3777
Spain 00800 2255 4835*
Sweden 00800 2255 4835*
Switzerland 00800 2255 4835*
Taiwan 886 (2) 2722 9622
United Kingdom & Ireland 00800 2255 4835*
USA 1 800 833 9200

* European toll-free number. If not accessible, call: +41 52 675 3777

Updated 10 February 2011

For Further Information. Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit www.tektronix.com



Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.

02 Oct 2011

60W-15105-1

