

Anritsu envision : ensure

Bandpass Filters

For Interference and PIM Hunting Antenna Systems

Introduction

The Anritsu bandpass filters in this series are designed to be used with the handheld MA2700 InterferenceHunter™ and the 2000-1844-R PIM Hunter™ systems, and can be used in a variety of applications as a general purpose bandpass filter. The bands offered cover common cellular uplink frequencies. Contact Anritsu for additional frequency ranges.




Anritsu Part Number	Start Frequency	Stop Frequency	Usage E-UTRA Band	Nominal Insertion Loss
2000-1734-R	699 MHz	715 MHz	Bands 12 & 17	3 dB
2000-1735-R	776 MHz	788 MHz	Band 13	3 dB
2000-1736-R	815 MHz	850 MHz	U.S. Cellular & Band 5	2 dB
2000-1742-R	832 MHz	862 MHz	Band 20	2 dB
2000-1739-R	880 MHz	915 MHz	Band 8	2 dB
2000-1740-R	1710 MHz	1785 MHz	Band 3	2 dB
2000-1737-R	1711 MHz	1756 MHz	AWS & Band 4	2 dB
2000-1738-R	1850 MHz	1910 MHz	PCS & Band 2	2 dB
2000-1741-R	1920 MHz	1980 MHz	Band 1	2 dB
2000-1799-R	2305 MHz	2320 MHz	WCS	4 dB
2000-1743-R	2500 MHz	2570 MHz	Band 7	2 dB
2000-1911-R	703 MHz	748 MHz	Band 28	2 dB
2000-1912-R	788 MHz	798 MHz	Band 14	3 dB
2000-1925-R	663 MHz	698 MHz	Band 71	3 dB
2000-1926-R	776 MHz	806 MHz	Bands 13 & 14	3 dB

These Anritsu bandpass filters are equipped with standard type-N connectors and can be used without the plastic housing. The housing can be easily removed and reinstalled using a #1 Phillips screwdriver. The torque amplifying thumb nut can be removed with the supplied 0.050 inch hex wrench. All specifications are typical.

2000-1734-R

707 MHz Center Frequency

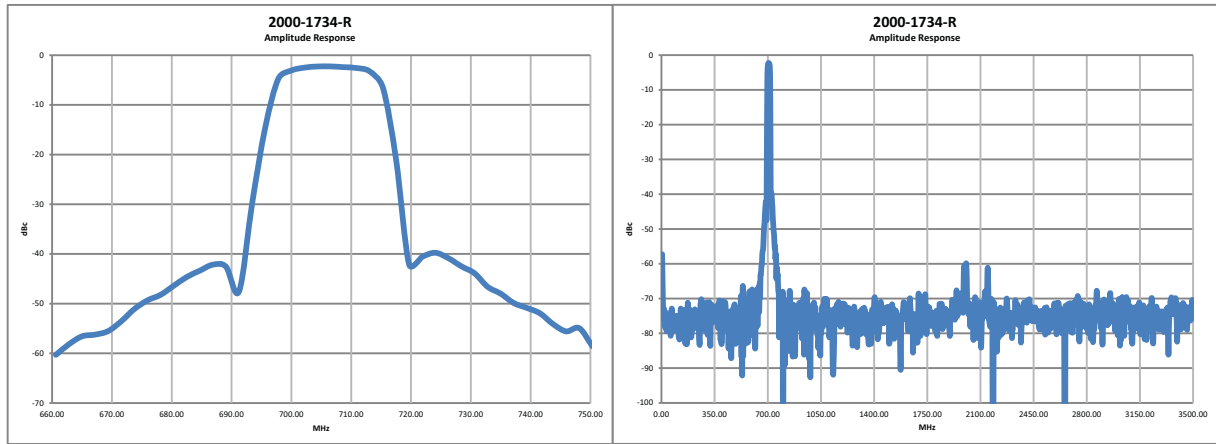


Passband

Stopband

2000-1735-R

782 MHz Center Frequency

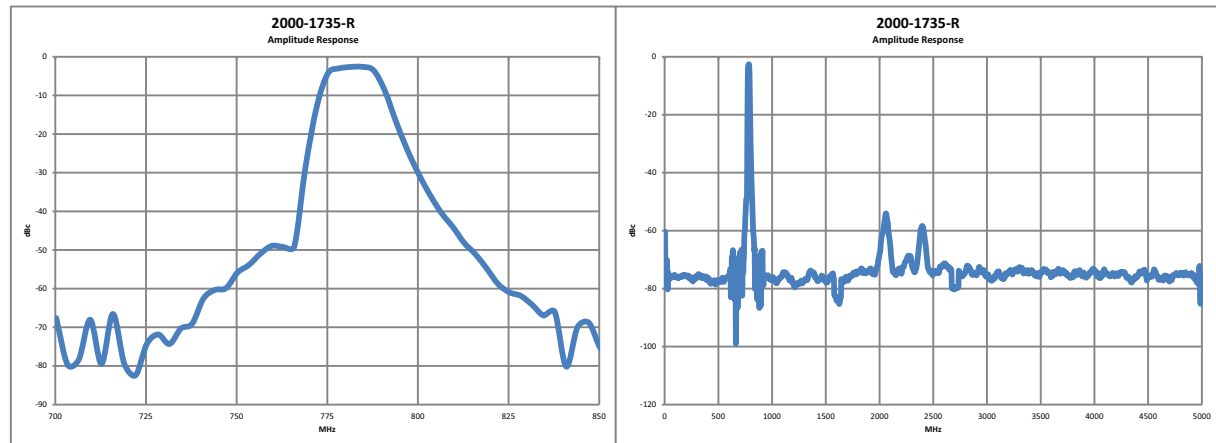


Passband


Stopband

2000-1736-R

832 MHz Center Frequency

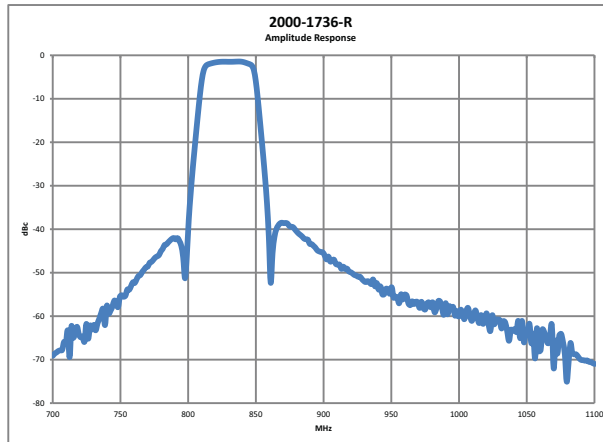


Passband

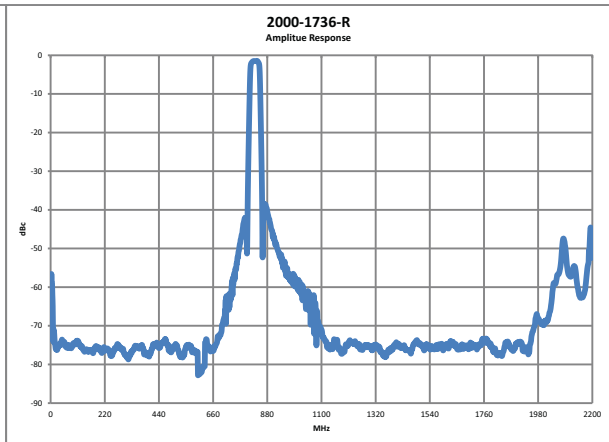


Stopband

2000-1737-R

1733 MHz Center Frequency

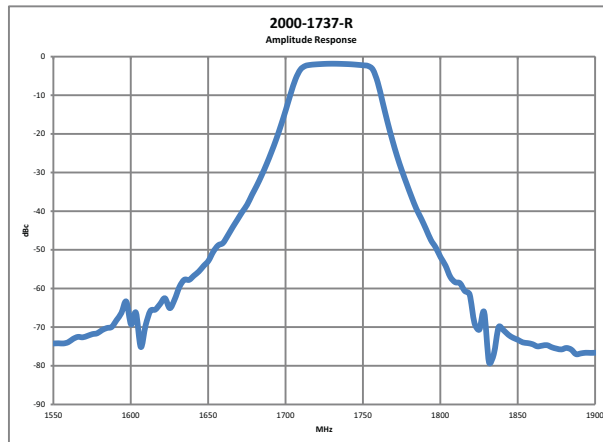


Passband

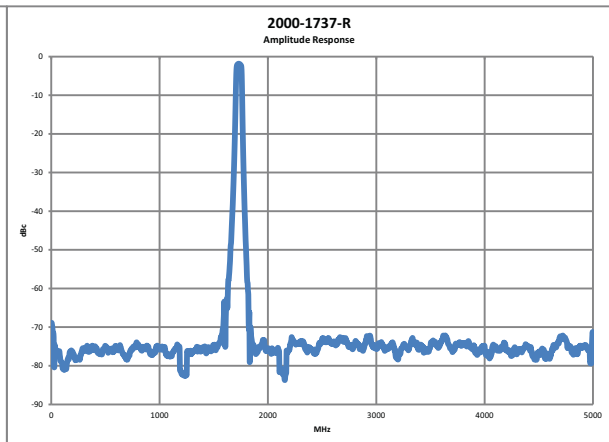


Stopband

2000-1738-R

1880 MHz Center Frequency

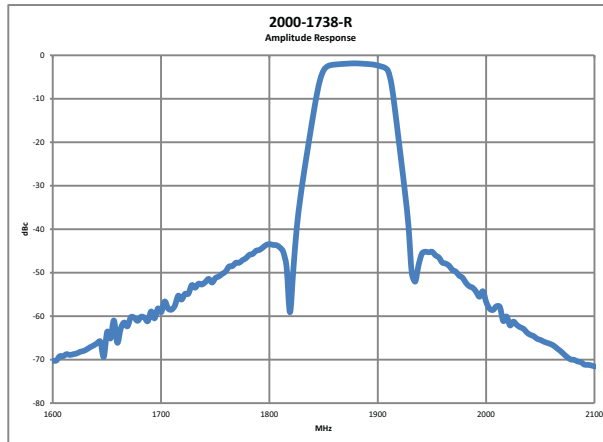


Passband

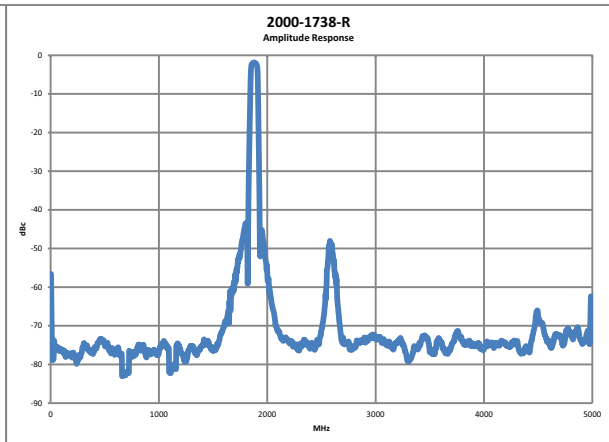


Stopband

2000-1739-R

898 MHz Center Frequency

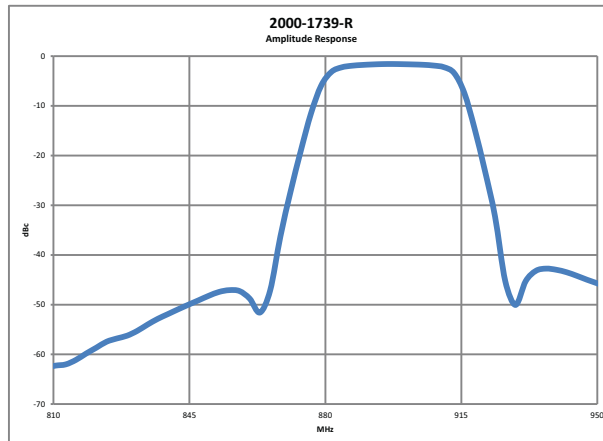


Passband

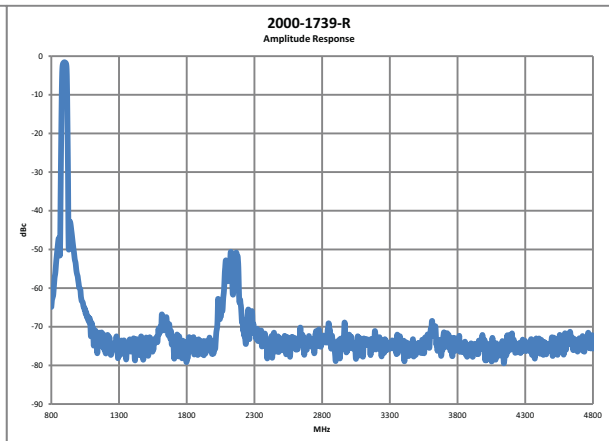

Stopband


2000-1740-R

1748 MHz Center Frequency

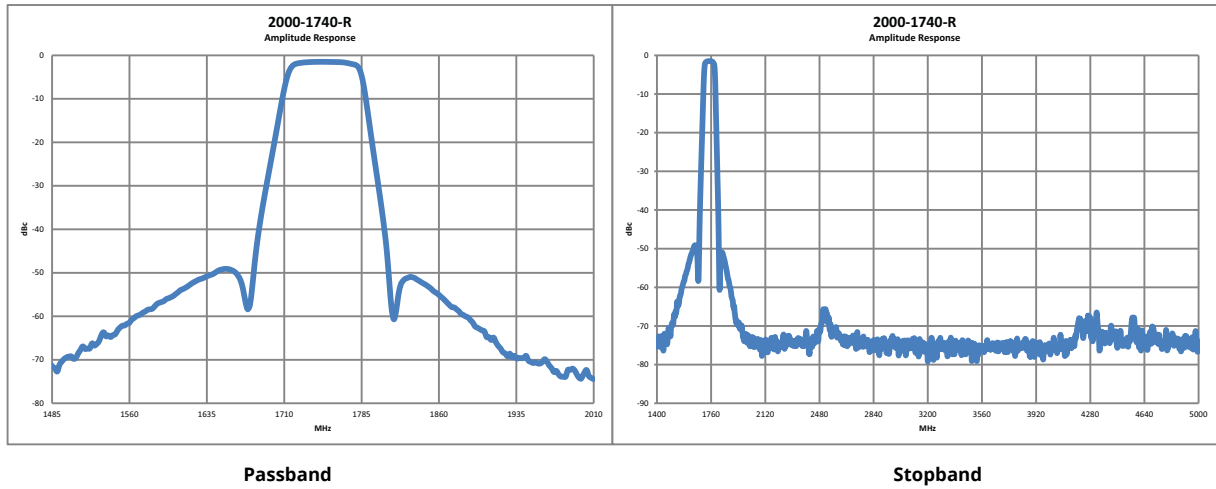


2000-1741-R

1950 MHz Center Frequency

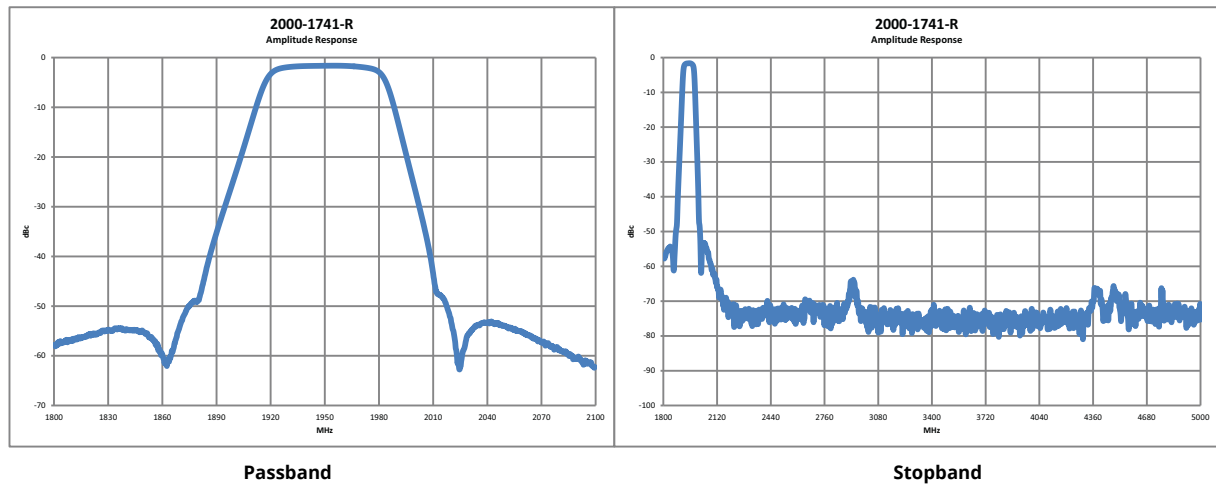


2000-1742-R

847 MHz Center Frequency

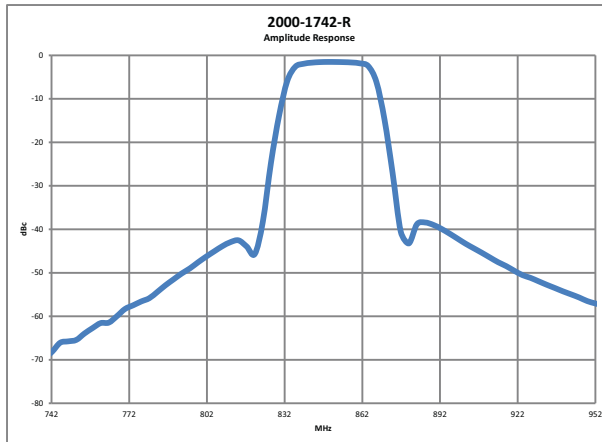


Passband

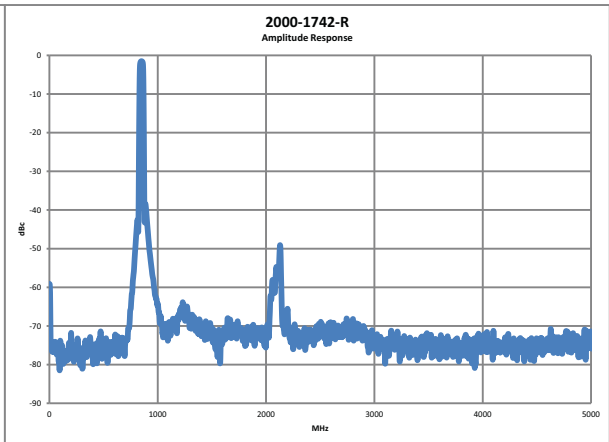


Stopband

2000-1743-R

2535 MHz Center Frequency

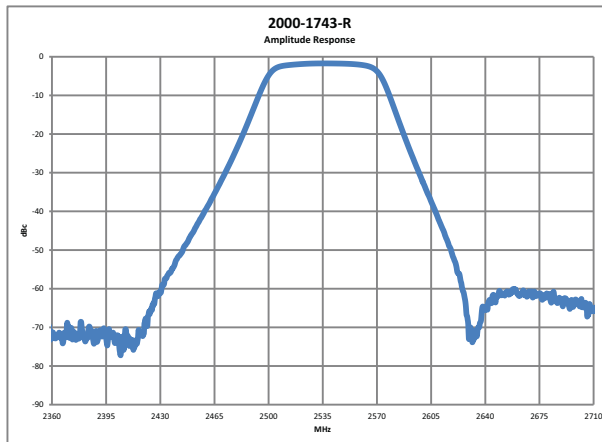


Passband

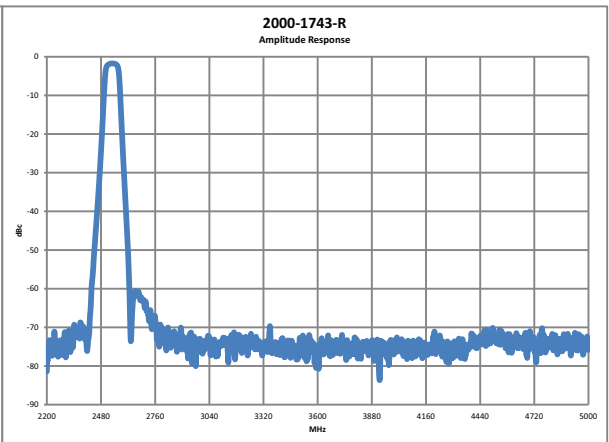

Stopband

2000-1798-R


DC to 6000 MHz Passband Frequency

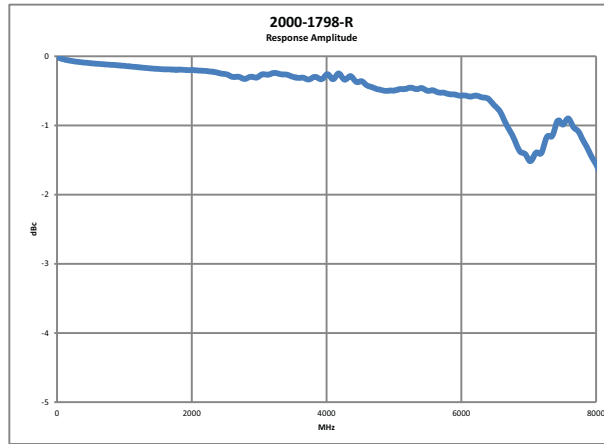

Passband

2000-1799-R

2313 MHz Center Frequency

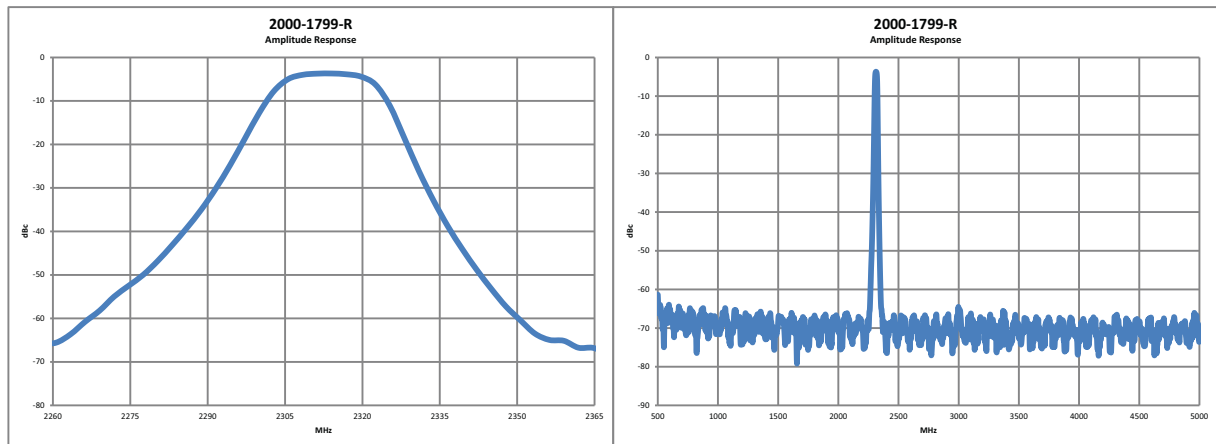


Passband


Stopband

2000-1911-R

726 MHz Center Frequency

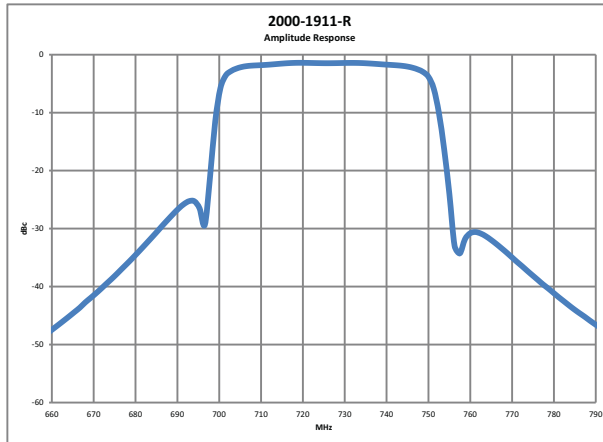


Passband

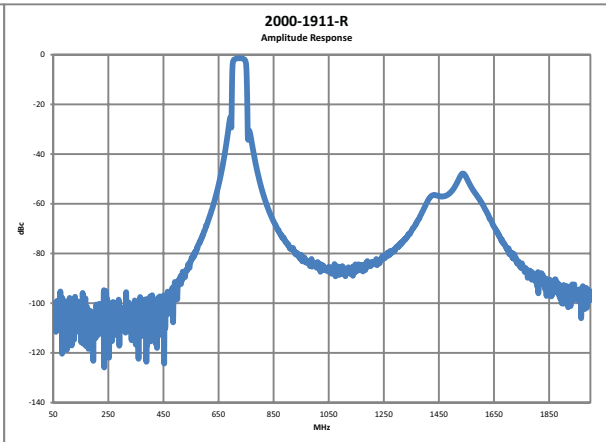


Stopband

2000-1912-R

793 MHz Center Frequency

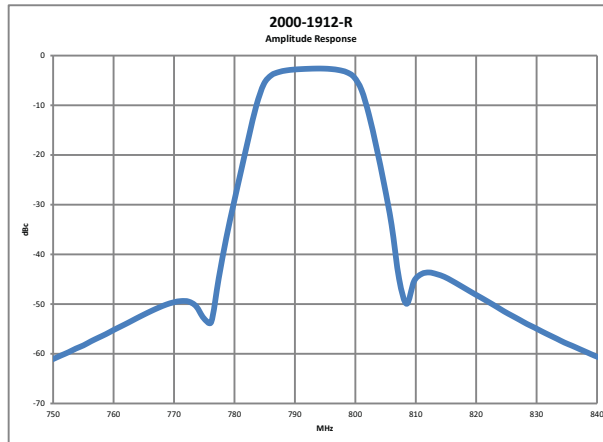


Passband

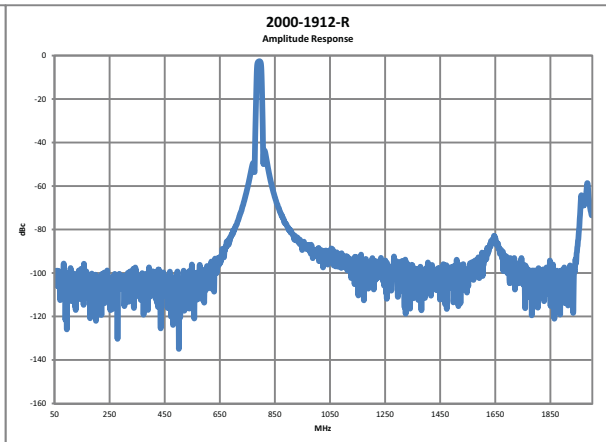

Stopband

2000-1925-R

681 MHz Center Frequency

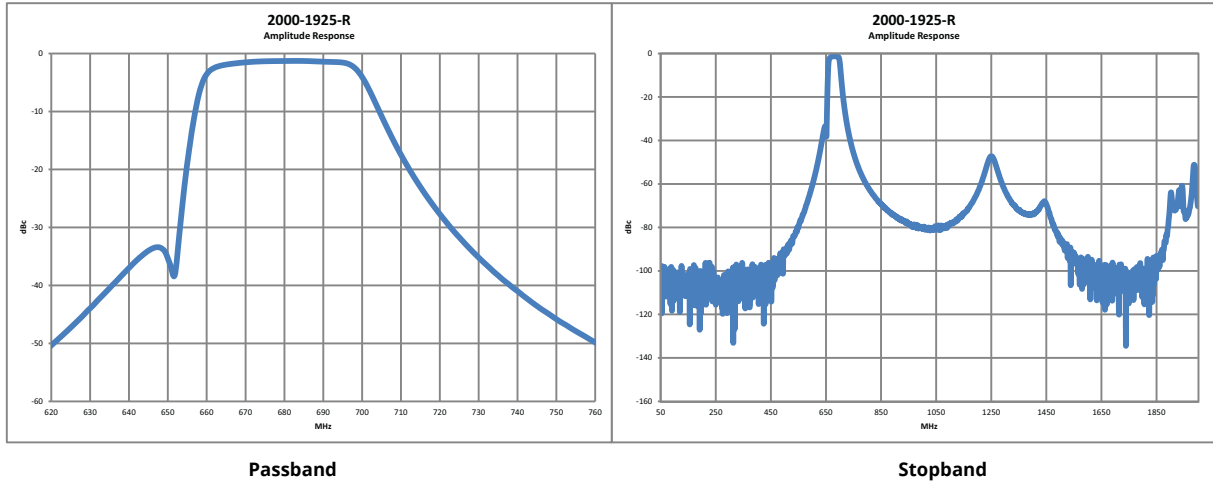


Passband

Stopband

2000-1926-R

791 MHz Center Frequency

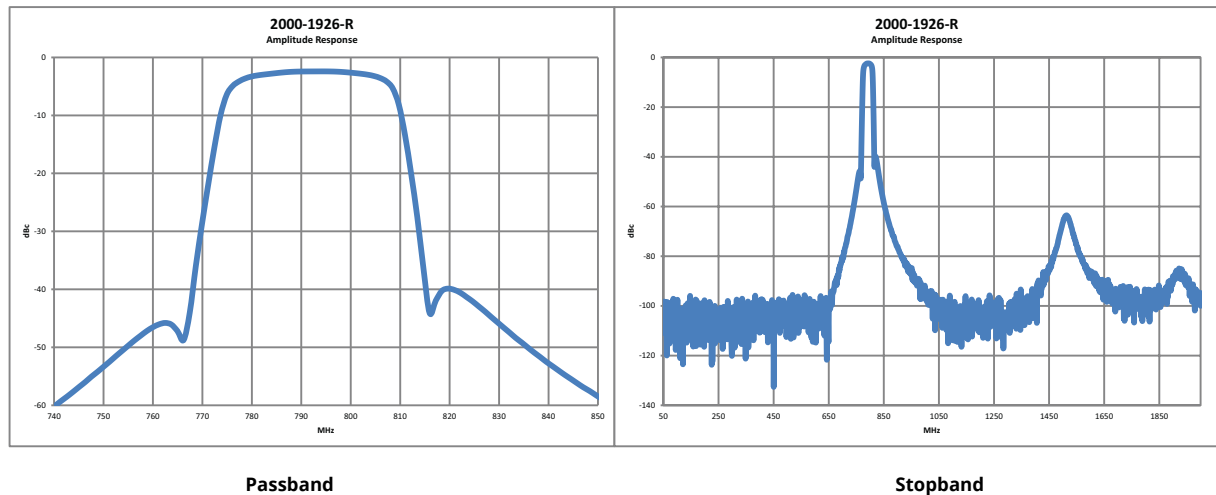

Passband

Stopband

Regulatory Compliance

European Union	CISPR 11/EN 55011, IEC/EN 61000-4-2/3/4/5/6/8/11 Safety EN 61010-1:2010 RoHS Directive 2011/65/EU
Australia and New Zealand	RCM AS/NZS 4417:2012
South Korea	KCC-REM-A21-0004

Training at Anritsu

Anritsu has designed courses to help you stay up to date with technologies important to your job. For available training courses, visit: www.anritsu.com/training



• United States

Anritsu Company

450 Century Parkway, Suite 190, Allen,
TX 75013 U.S.A.
Toll Free: +1-800-267-4878
Phone: +1-972-644-1777

• Canada

Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120, Kanata,
Ontario K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

• Brazil

Anritsu Eletronica Ltda.

Praça Amadeu Amaral, 27 - 1 Andar
01327-010 - Bela Vista - Sao Paulo - SP
Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

• Mexico

Anritsu Company, S.A. de C.V.

Blvd Miguel de Cervantes Saavedra #169 Piso 1,
Col. Granada
Mexico, Ciudad de Mexico, 11520, MEXICO
Phone: +52-55-4169-7104

• United Kingdom

Anritsu EMEA L td.

200 Capability Green, Luton, Bedfordshire, LU1 3LU,
U.K.
Phone: +44-1582-433200
Fax: +44-1582-731303

• France

Anritsu S.A.

12 avenue du Québec, Bâtiment Iris 1- Silic 612,
81829 VILLEBON SUR YVETTE, France
Phone: +33-1-60-92-15-50
Fax: +33-1-64-46-10-65

• Germany

Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1
81829 München, Germany
Phone: +49-89-442308-0
Fax: +49-89-442308-55

• Italy

Anritsu S.r.l.

Via Elio Vittorini 129, 00144 Roma, Italy
Phone: +39-6-509-9711
Fax: +39-6-502-2425

List Revision Date: 20180621

• Sweden

Anritsu AB

Isafjordsgatan 32C, 164 40 KISTA, Sweden
Phone: +46-8-534-707-00

• Finland

Anritsu AB

Teknobulevardi 3-5, FI-01530 VANTAA, Finland
Phone: +358-20-741-8100
Fax: +358-20-741-8111

• Denmark

Anritsu A/S

Torveporten 2, 2500 Valby, Denmark
Phone: +45-7211-2200
Fax: +45-7211-2210

• Russia

Anritsu EMEA Ltd.

Representation Office in Russia

Tverskaya str. 16/2, bld. 1, 7th floor.
Moscow, 125009, Russia
Phone: +7-495-363-1694
Fax: +7-495-935-8962

• Spain

Anritsu EMEA Ltd.

Representation Office in Spain

Edificio Cuzco IV, Po. de la Castellana, 141, Pta. 5
28046, Madrid, Spain
Phone: +34-915-726-761
Fax: +34-915-726-621

• United Arab Emirates

Anritsu EMEA Ltd.

Dubai Liaison Office

902, Aurora Tower,
P O Box: 500311- Dubai Internet City
Dubai, United Arab Emirates
Phone: +971-4-3758479
Fax: +971-4-4249036

• India

Anritsu India Private Limited

6th Floor, Indiqube ETA, No.38/4, Adjacent to EMC2,
Doddanekundi, Outer Ring Road, Bengaluru - 560048,
India
Phone: +91-80-6728-1300
Fax: +91-80-6728-1301

• Singapore

Anritsu Pte. Ltd.

11 Chang Charn Road, #04-01, Shriro House
Singapore 159640
Phone: +65-6282-2400
Fax: +65-6282-2533

• P.R. China (Shanghai)

Anritsu (China) Co., Ltd.

Room 2701-2705, Tower A,
New Caohejing International Business Center
No. 391 Gui Ping Road Shanghai, 200233, P.R. China
Phone: +86-21-6237-0898
Fax: +86-21-6237-0899

• P.R. China (Hong Kong)

Anritsu Company Ltd.

Unit 1006-7, 10/F., Greenfield Tower, Concordia Plaza,
No. 1 Science Museum Road, Tsim Sha Tsui East,
Kowloon, Hong Kong, P.R. China
Phone: +852-2301-4980
Fax: +852-2301-3545

• Japan

Anritsu Corporation

8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016
Japan
Phone: +81-46-296-6509
Fax: +81-46-225-8352

• Korea

Anritsu Corporation, Ltd.

5FL, 235 Pangyoyeok-ro, Bundang-gu, Seongnam-si,
Gyeonggi-do, 13494 Korea
Phone: +82-31-696-7750
Fax: +82-31-696-7751

• Australia

Anritsu Pty. Ltd.

Unit 20, 21-35 Ricketts Road,
Mount Waverley, Victoria 3149, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

• Taiwan

Anritsu Company Inc.

7F, No. 316, Sec. 1, NeiHu Rd., Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817