



# AA-100M1G-200 SOLID STATE HIGH POWER AMPLIFIER

## FEATURES

- Rack mounted system
- Class AB linear LDMOS design
- Instantaneous wide bandwidth
- Suitable for all single channel modulation standards
- Built-in protection circuits
- High reliability and ruggedness



## ELECTRICAL SPECIFICATIONS

Parameter	Specification	Notes
Operating Frequency Range	100 - 1000 MHz	
Power Output	200 Watt Min	CW
Power Output @ P1dB GCP	>150 Watt Typ	
Power Gain	53 dB Min	
Power Gain Flatness	3.0 dB p-p Max	Constant input power
Input Return Loss	10 dB Min	Relative to 50 Ohm
2-Tone Intermodulation (IMD)	-30 dBc Typ	43dBm/Tone, Δ = 1MHz
Harmonics	-20 dBc Typ	At rated output power
Spurious	-60 dBc Max	Non-harmonics
Operating Voltage	100 - 240 VAC	
Power Consumption	1500 Watt Max	At rated Pout
Max Input Power Protection	+3 dBm	<10 Sec without damage
Load VSWR Protection	5 : 1	<1 minute at rated Pout

## ENVIRONMENTAL CHARACTERISTICS






Parameter	Specification	Notes
Operating Ambient Temperature	0 to +50 °C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	5 to 95 %	Non-condensation

## MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions W x H x D	430 x 133 x 600 mm	3U - wo handles & connectors
Weight	20 kg.	
RF Connectors In / Out	Type-N Female	Front Panel Standard
AC Power / Interface Connector	IEC 60320-C14 / 9-Pin D-Sub	
Cooling	Built in Fan Cooling	Variable speed
<b>OPTIONAL:</b> Digital Monitor & Control FWD, REV, VSWR, GAIN, ALC, V & I, TEMP	Ethernet RJ-45 TCP/IP, RS422/485 Optional GPIB Interface	Remote Bluetooth application

## OUTLINE DRAWINGS

### OPTIONAL LCD DIGITAL CONTROLLER

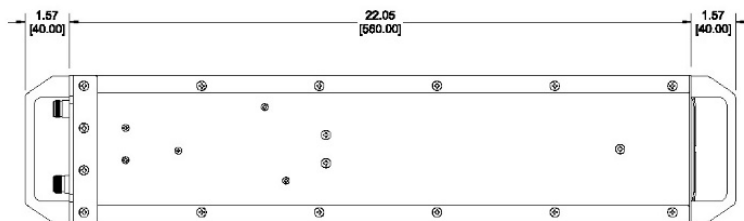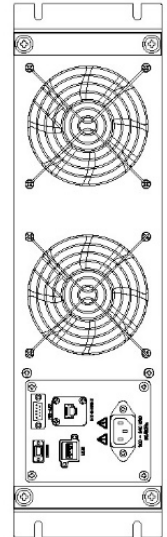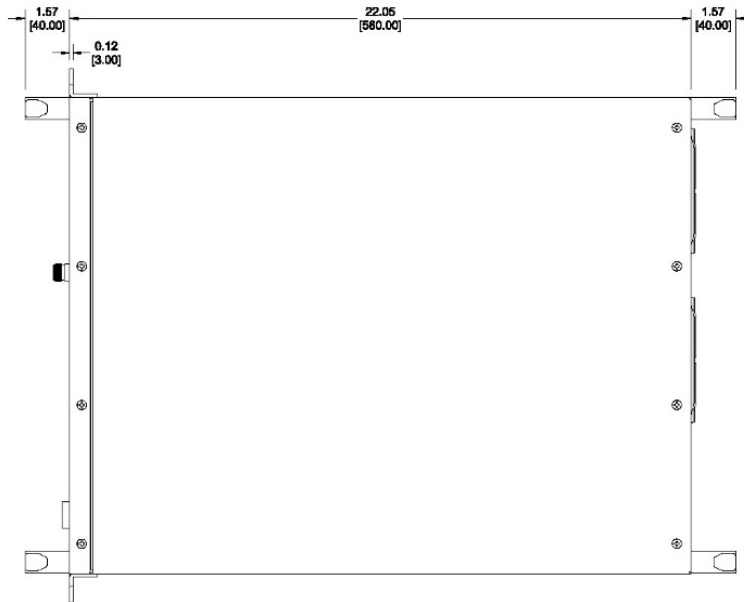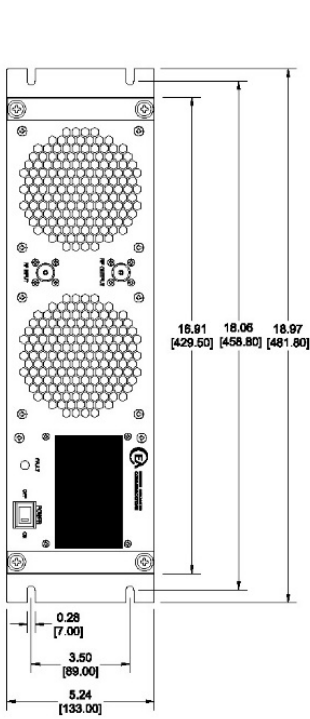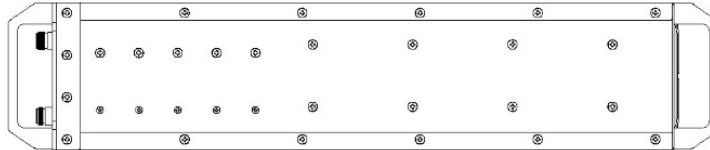

## MANUAL GAIN ADJUSTMENT

